

SPIGOLO FLOOR

Studiocharlie

Concepita per offrire un'illuminazione direzionale a 360°, la collezione Spigolo ospita sorgenti LED all'interno di una struttura in alluminio estruso e tubolare, collegata con giunti in polimero stampato, che consentono di ruotare i profili per produrre un'illuminazione diretta o indiretta, schermata da un diffusore opalino in policarbonato. La versione a pavimento è progettata per fornire un divisorio virtuale agli ambienti, mentre le versioni a soffitto e a parete permettono di illuminare l'ambiente in modo versatile e confortevole.



2700K

LAMPING

Source	3xlinear LED
Total power	6+10+33W
Emission	diffused
Switching	mono switch, dimmable on cable
Tension	110-240V
Color temperature	2700K
Luminous flux	335lm+600lm+1765lm
Typ CRI	85
IP class	20
Materials	aluminium + PC + ABS
Notes	orientable diffusers, cable length 4,5m
Net lamp weight	10 kg

Codes

SPI LW2 23
SPI LN2 23


Structure

white
black

PACKAGE

Package 01 Dimension: 57x78x16 cm / Gross weight: 6,5 kg
Package 02 Dimension: 18 x22x190 cm / Gross weight: 7 kg

Certificazioni

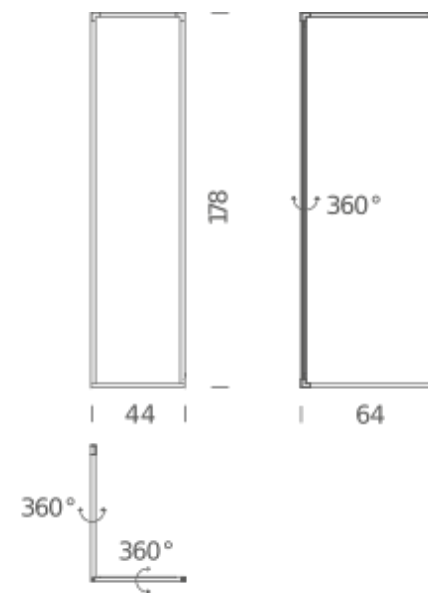

3000K

LAMPING

Source	3xlinear LED
Total power	6+10+33W
Emission	diffused
Switching	mono switch, dimmable on cable
Tension	110-240V
Color temperature	3000K
Luminous flux	335lm+600lm+1765lm
Typ CRI	85
IP class	20
Materials	aluminium + PC + ABS
Notes	orientable diffusers, cable length 4,5m
Net lamp weight	10 kg

Codes

SPI LWW 23
SPI LNN 23

Structure

white
black

PACKAGE

Package 01 Dimension: 57x78x16 cm / Gross weight: 6,5 kg
Package 02 Dimension: 18 x22x190 cm / Gross weight: 7 kg

Certificazioni

