

# ZIRKOL OVAL

ZIRKOL – O è una famiglia di lampade ovali a sospensione ideale per l'illuminazione generale e decorativa di ambienti.

Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione omogenea.

L'emissione di luce può essere diretta o bi-emissione con alto flusso luminoso e con tre differenti temperature colore.



# 2X1M | DOWNLIGHT - 2700K

## LAMPING

|                       |                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                |
| Total power           | 74W                                                                                                                                                                                       |
| Emission              | Diffused orientable                                                                                                                                                                       |
| Switching             | DALI 1-100%                                                                                                                                                                               |
| Tension               | 110/240V                                                                                                                                                                                  |
| Color temperature     | 2700K                                                                                                                                                                                     |
| Luminous flux         | 4282lm                                                                                                                                                                                    |
| Typ CRI               | 90                                                                                                                                                                                        |
| Energy class          | E                                                                                                                                                                                         |
| IP class              | 40                                                                                                                                                                                        |
| Dimensions            | 200x100x5cm                                                                                                                                                                               |
| Materials             | Aluminium                                                                                                                                                                                 |
| Notes                 | included: 1 driver WALIMLED100/24, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 4x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                             |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                             |
| Net lamp weight       | 6 kg                                                                                                                                                                                      |

## Codes

BZRO16A20G15DBO  
BZRO16A20G15DNE  
BZRO16A20G15DOR


## Structure

white  
black  
gold

## PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 11,4 kg

## Certificazioni

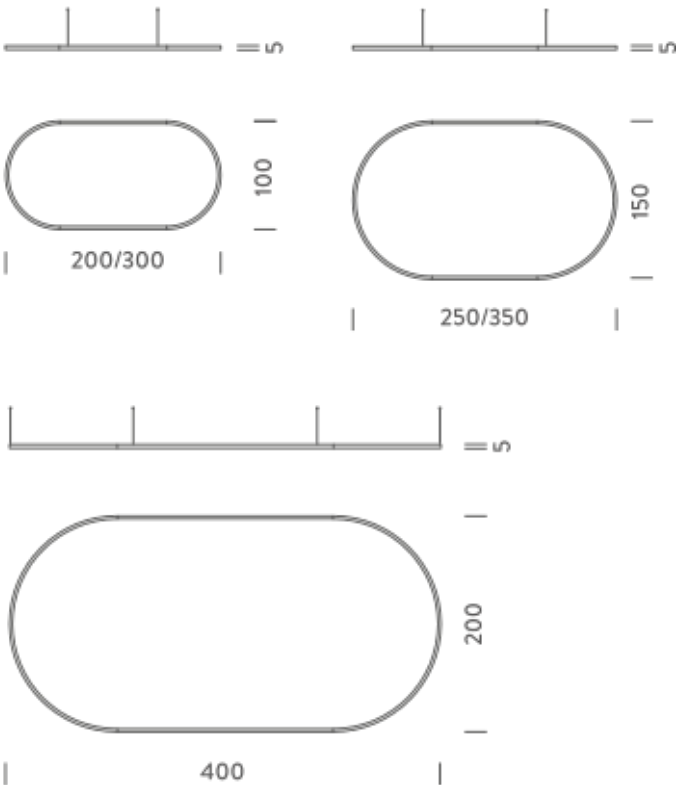

2X1M | UP - DOWNLIGHT -2700K

LAMPING

|                       |                                                                                                                                                                                            |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                 |
| Total power           | 148W                                                                                                                                                                                       |
| Emission              | Diffused orientable                                                                                                                                                                        |
| Switching             | DALI 1-100%                                                                                                                                                                                |
| Tension               | 220/240V                                                                                                                                                                                   |
| Color temperature     | 2700K                                                                                                                                                                                      |
| Luminous flux         | 8563lm                                                                                                                                                                                     |
| Typ CRI               | 90                                                                                                                                                                                         |
| Energy class          | E                                                                                                                                                                                          |
| IP class              | 40                                                                                                                                                                                         |
| Dimensions            | 200x100x5cm                                                                                                                                                                                |
| Materials             | Aluminium                                                                                                                                                                                  |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 2x electrical cables 5m, 4x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                              |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2<br>electrical cables   Ceiling plate, for false ceiling                                                                             |
| Net lamp weight       | 6,1 kg                                                                                                                                                                                     |

Codes

BZRO17A20G15DBO  
BZRO17A20G15DNE  
BZRO17A20G15DOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 11,5 kg

Certificazioni

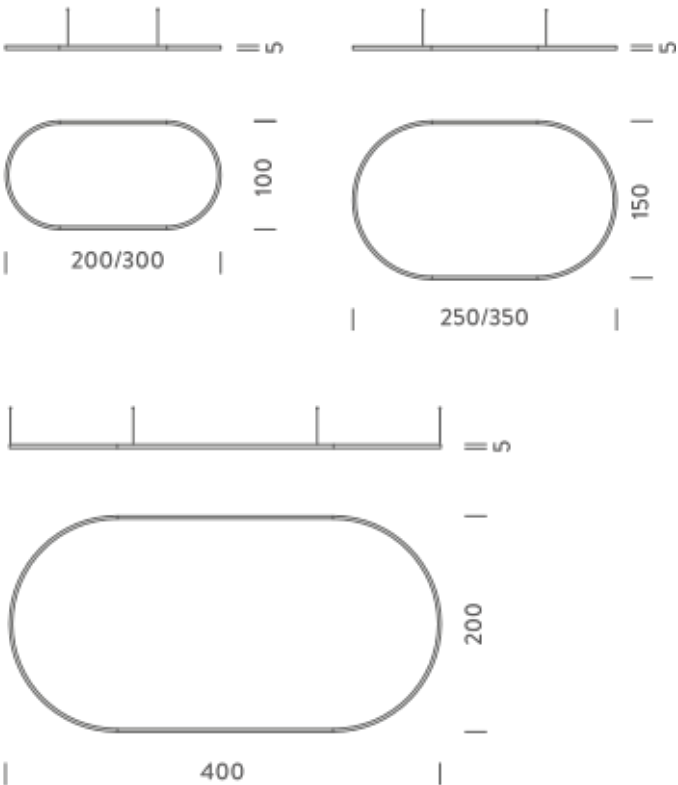

# 2X1M | DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                |
| Total power           | 74W                                                                                                                                                                                       |
| Emission              | Diffused orientable                                                                                                                                                                       |
| Switching             | DALI 1-100%                                                                                                                                                                               |
| Tension               | 110/240V                                                                                                                                                                                  |
| Color temperature     | 3000K                                                                                                                                                                                     |
| Luminous flux         | 4533lm                                                                                                                                                                                    |
| Typ CRI               | 90                                                                                                                                                                                        |
| Energy class          | E                                                                                                                                                                                         |
| IP class              | 40                                                                                                                                                                                        |
| Dimensions            | 200x100x5cm                                                                                                                                                                               |
| Materials             | Aluminium                                                                                                                                                                                 |
| Notes                 | included: 1 driver WALIMLED100/24, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 4x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                             |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                             |
| Net lamp weight       | 6 kg                                                                                                                                                                                      |

## Codes

BZRO16A20G15WBO  
BZRO16A20G15WNE  
BZRO16A20G15WOR


## Structure

white  
black  
gold

## PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 11,4 kg

## Certificazioni

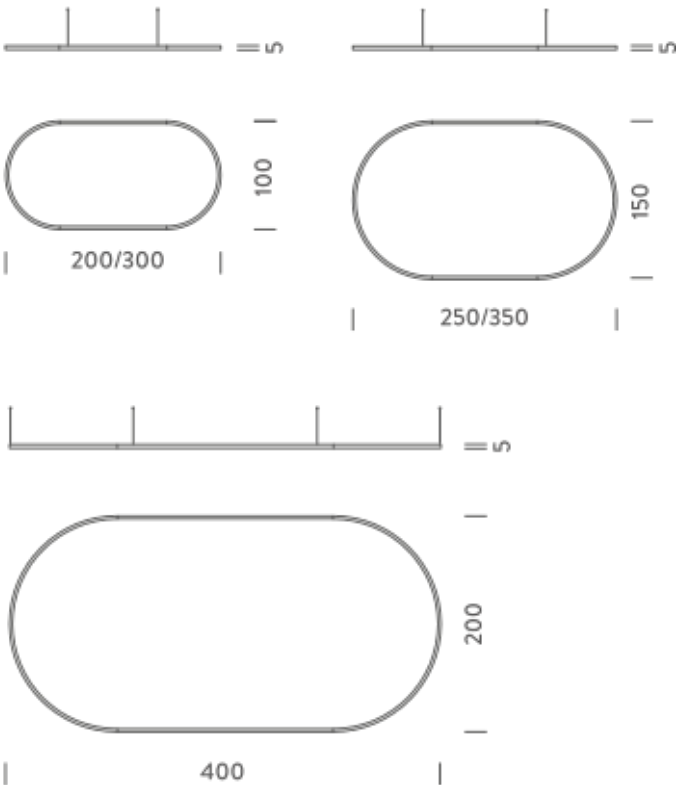

2X1M | UP - DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                           |
| Total power           | 148W                                                                                                                                                                                 |
| Emission              | Diffused orientable                                                                                                                                                                  |
| Switching             | DALI 1-100%                                                                                                                                                                          |
| Tension               | 220/240V                                                                                                                                                                             |
| Color temperature     | 3000K                                                                                                                                                                                |
| Luminous flux         | 9067lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                   |
| Energy class          | E                                                                                                                                                                                    |
| IP class              | 40                                                                                                                                                                                   |
| Dimensions            | 200x100x5cm                                                                                                                                                                          |
| Materials             | Aluminium                                                                                                                                                                            |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                        |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                          |
| Net lamp weight       | 6,1 kg                                                                                                                                                                               |

Codes

BZRO17A20G15WBO  
BZRO17A20G15WNE  
BZRO17A20G15WOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 11,5 kg

Certificazioni

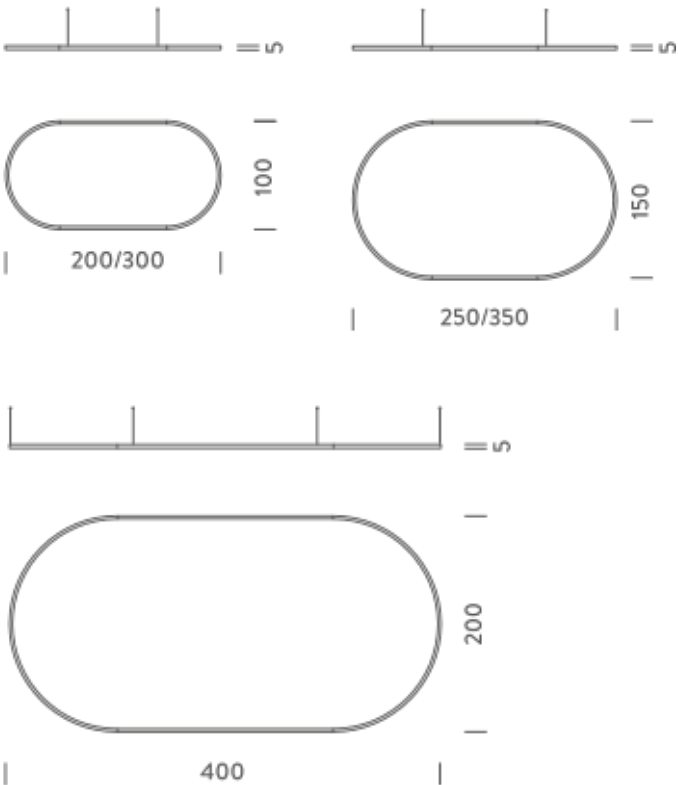

# 2X1M | DOWNLIGHT - 4000K

## LAMPING

|                       |                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                |
| Total power           | 74W                                                                                                                                                                                       |
| Emission              | Diffused orientable                                                                                                                                                                       |
| Switching             | DALI 1-100%                                                                                                                                                                               |
| Tension               | 110/240V                                                                                                                                                                                  |
| Color temperature     | 4000K                                                                                                                                                                                     |
| Luminous flux         | 5037lm                                                                                                                                                                                    |
| Typ CRI               | 90                                                                                                                                                                                        |
| Energy class          | D                                                                                                                                                                                         |
| IP class              | 40                                                                                                                                                                                        |
| Dimensions            | 200x100x5cm                                                                                                                                                                               |
| Materials             | Aluminium                                                                                                                                                                                 |
| Notes                 | included: 1 driver WALIMLED100/24, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 4x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                             |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                             |
| Net lamp weight       | 6 kg                                                                                                                                                                                      |

## Codes

BZRO16A20G15NBO  
BZRO16A20G15NNE  
BZRO16A20G15NOR


## Structure

white  
black  
gold

## PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 11,4 kg

## Certificazioni

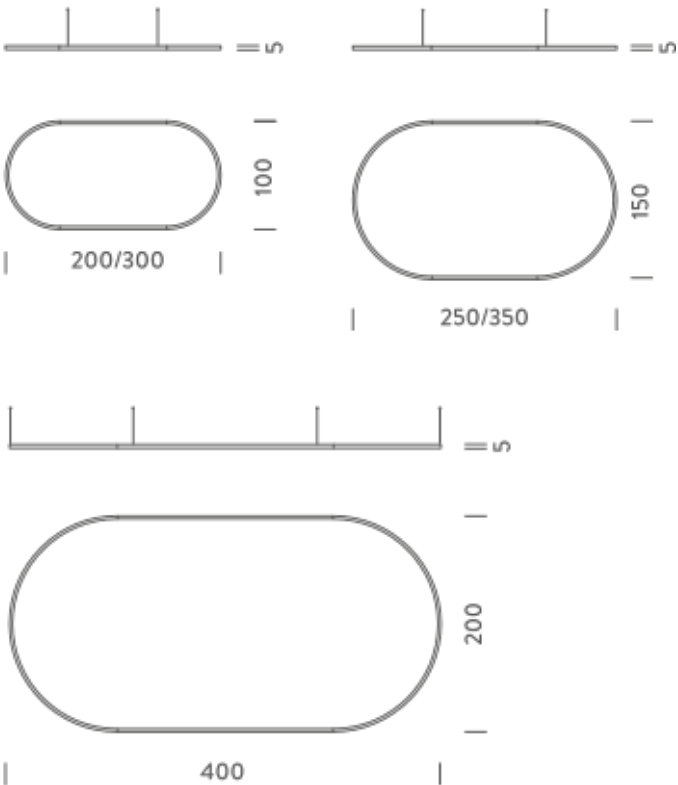

2X1M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                           |
| Total power           | 148W                                                                                                                                                                                 |
| Emission              | Diffused orientable                                                                                                                                                                  |
| Switching             | DALI 1-100%                                                                                                                                                                          |
| Tension               | 220/240V                                                                                                                                                                             |
| Color temperature     | 4000K                                                                                                                                                                                |
| Luminous flux         | 10074lm                                                                                                                                                                              |
| Typ CRI               | 90                                                                                                                                                                                   |
| Energy class          | D                                                                                                                                                                                    |
| IP class              | 40                                                                                                                                                                                   |
| Dimensions            | 200x100x5cm                                                                                                                                                                          |
| Materials             | Aluminium                                                                                                                                                                            |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                        |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                          |
| Net lamp weight       | 6,1 kg                                                                                                                                                                               |

Codes

BZRO17A20G15NBO  
BZRO17A20G15NNE  
BZRO17A20G15NOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 11,5 kg

Certificazioni

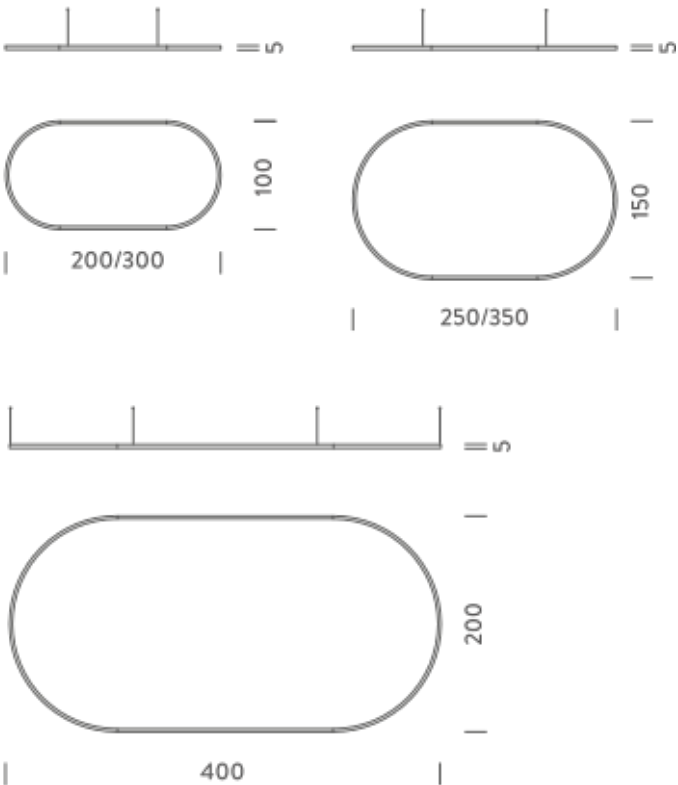

# 3X1M | DOWNLIGHT - 2700K

## LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 103W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 2700K                                                                                                                                                                               |
| Luminous flux         | 5948lm                                                                                                                                                                              |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | E                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 300x100x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                          |
| Net lamp weight       | 7,7 kg                                                                                                                                                                              |

## Codes

BZRO16A30G15DBO  
BZRO16A30G15DNE  
BZRO16A30G15DOR


## Structure

white  
black  
gold

## PACKAGE

Package 01      Dimension: 310x100x15 cm / Gross weight: 15,7 kg

## Certificazioni

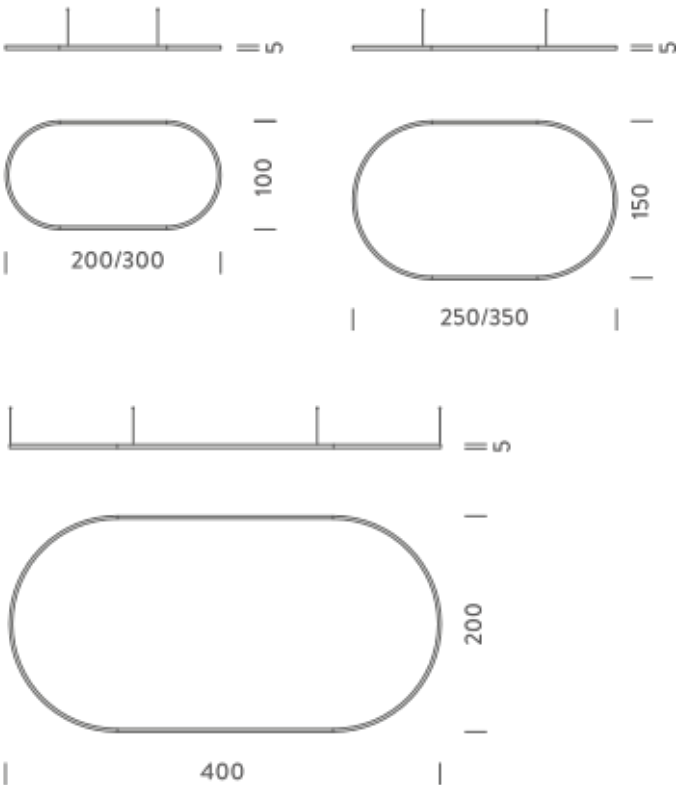

3X1M | UP - DOWNLIGHT - 2700K

LAMPING


|                       |                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                        |
| Total power           | 206W                                                                                                                                                                              |
| Emission              | Diffused orientable                                                                                                                                                               |
| Switching             | DALI 1-100%                                                                                                                                                                       |
| Tension               | 220/240V                                                                                                                                                                          |
| Color temperature     | 2700K                                                                                                                                                                             |
| Luminous flux         | 11895lm                                                                                                                                                                           |
| Typ CRI               | 90                                                                                                                                                                                |
| Energy class          | E                                                                                                                                                                                 |
| IP class              | 40                                                                                                                                                                                |
| Dimensions            | 300x100x5cm                                                                                                                                                                       |
| Materials             | Aluminium                                                                                                                                                                         |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                     |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                       |
| Net lamp weight       | 8 kg                                                                                                                                                                              |

Codes  
BZRO17A30G15DBO  
BZRO17A30G15DNE  
BZRO17A30G15DOR

PACKAGE

Package 01      Dimension: 310x100x15 cm / Gross weight: 16 kg

Certificazioni

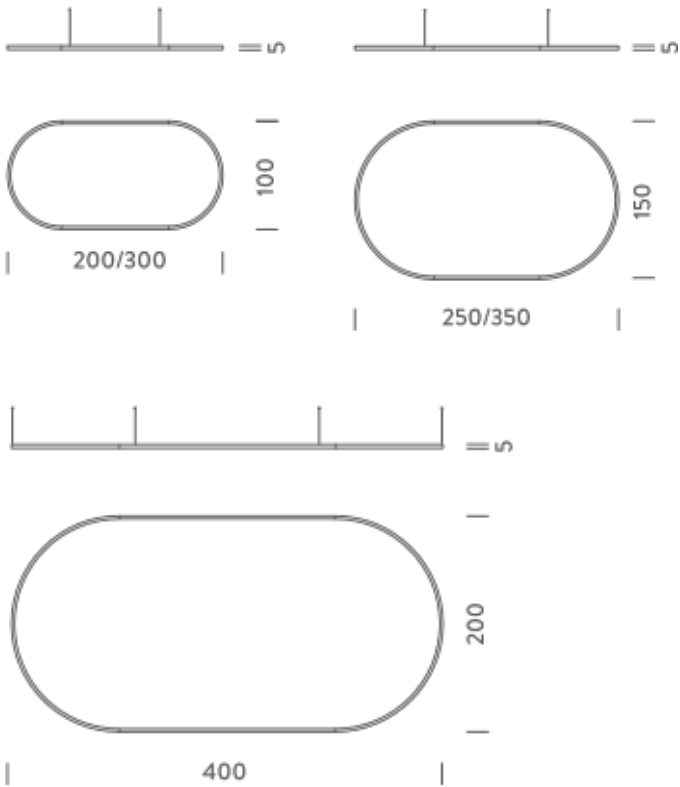

# 3X1M | DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                |
| Total power           | 103W                                                                                                                                                                                      |
| Emission              | Diffused orientable                                                                                                                                                                       |
| Switching             | DALI 1-100%                                                                                                                                                                               |
| Tension               | 220/240V                                                                                                                                                                                  |
| Color temperature     | 3000K                                                                                                                                                                                     |
| Luminous flux         | 6297lm                                                                                                                                                                                    |
| Typ CRI               | 90                                                                                                                                                                                        |
| Energy class          | E                                                                                                                                                                                         |
| IP class              | 40                                                                                                                                                                                        |
| Dimensions            | 300x100x5cm                                                                                                                                                                               |
| Materials             | Aluminium                                                                                                                                                                                 |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 4x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                             |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                             |
| Net lamp weight       | 7,7 kg                                                                                                                                                                                    |

## Codes

BZRO16A30G15WBO  
BZRO16A30G15WNE  
BZRO16A30G15WOR


## Structure

white  
black  
gold

## PACKAGE

Package 01      Dimension: 310x100x15 cm / Gross weight: 15,7 kg

## Certificazioni

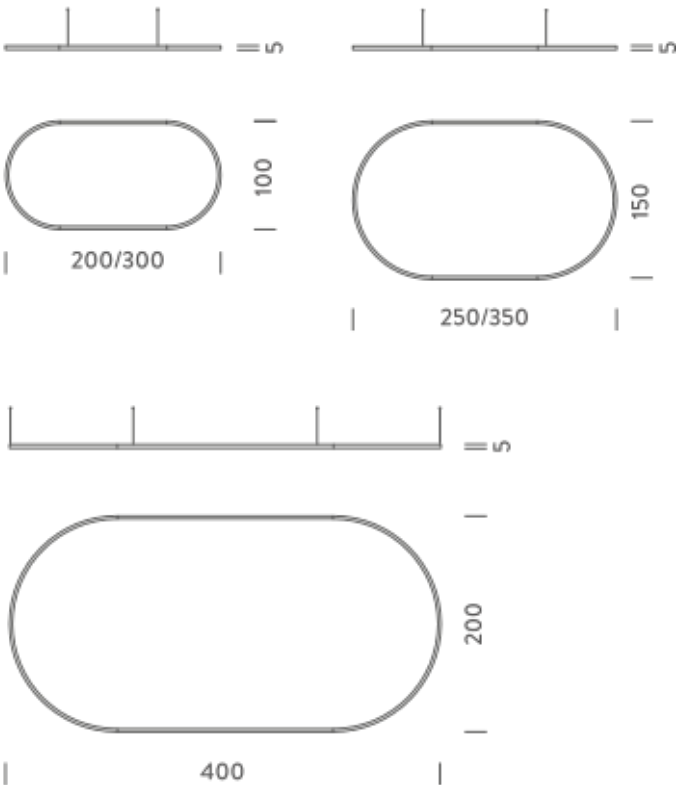

3X1M | UP - DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                        |
| Total power           | 206W                                                                                                                                                                              |
| Emission              | Diffused orientable                                                                                                                                                               |
| Switching             | DALI 1-100%                                                                                                                                                                       |
| Tension               | 220/240V                                                                                                                                                                          |
| Color temperature     | 3000K                                                                                                                                                                             |
| Luminous flux         | 12595lm                                                                                                                                                                           |
| Typ CRI               | 90                                                                                                                                                                                |
| Energy class          | E                                                                                                                                                                                 |
| IP class              | 40                                                                                                                                                                                |
| Dimensions            | 300x100x5cm                                                                                                                                                                       |
| Materials             | Aluminium                                                                                                                                                                         |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                     |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                       |
| Net lamp weight       | 8 kg                                                                                                                                                                              |

Codes

BZRO17A30G15WBO  
BZRO17A30G15WNE  
BZRO17A30G15WOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 310x100x15 cm / Gross weight: 16 kg

Certificazioni

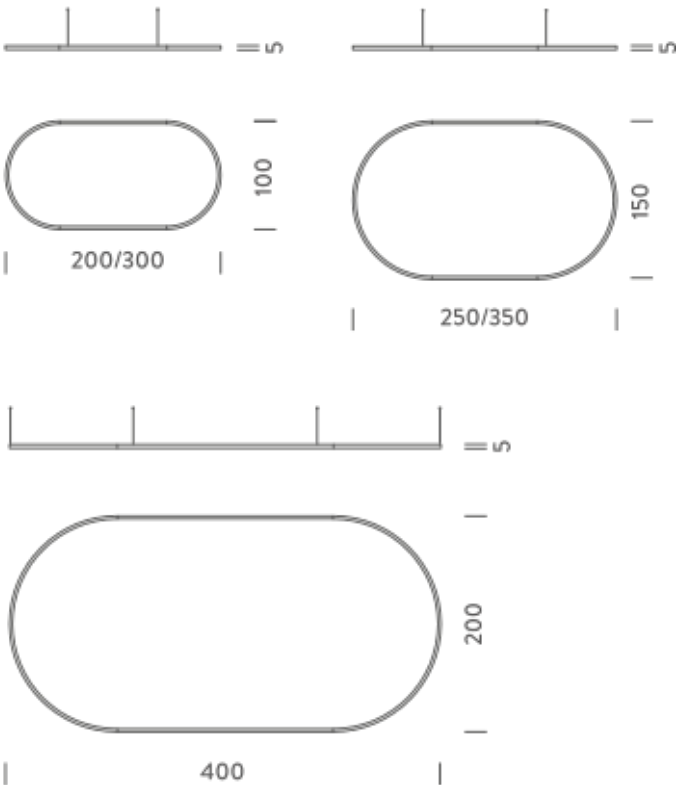

# 3X1M | DOWNLIGHT - 4000K

## LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 103W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 4000K                                                                                                                                                                               |
| Luminous flux         | 6997lm                                                                                                                                                                              |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | D                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 300x100x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                          |
| Net lamp weight       | 7,7 kg                                                                                                                                                                              |

## Codes

BZRO16A30G15NBO  
BZRO16A30G15NNE  
BZRO16A30G15NOR


## Structure

white  
black  
gold

## PACKAGE

Package 01  
Dimension: 310x100x15 cm / Gross weight: 15,7 kg

## Certificazioni

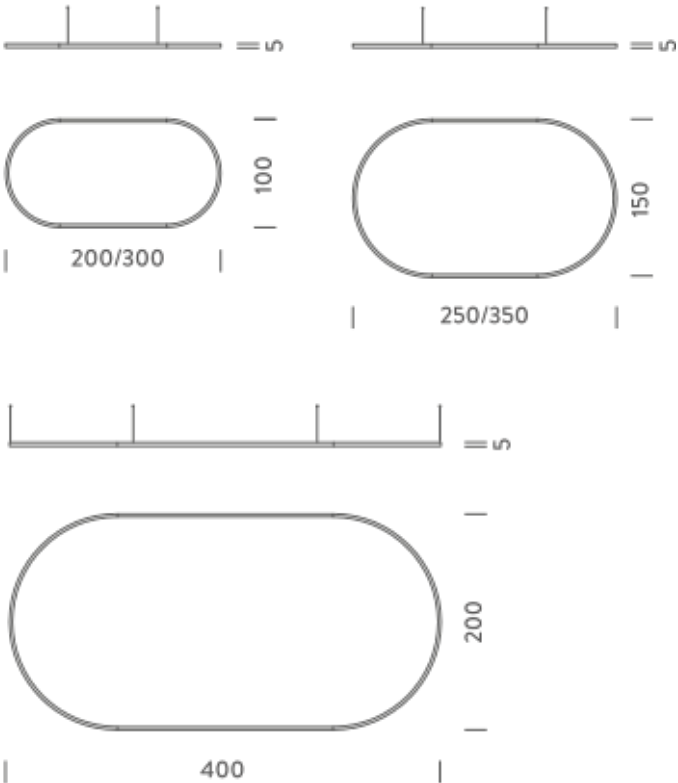

3X1M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                        |
| Total power           | 206W                                                                                                                                                                              |
| Emission              | Diffused orientable                                                                                                                                                               |
| Switching             | DALI 1-100%                                                                                                                                                                       |
| Tension               | 220/240V                                                                                                                                                                          |
| Color temperature     | 4000K                                                                                                                                                                             |
| Luminous flux         | 13994lm                                                                                                                                                                           |
| Typ CRI               | 90                                                                                                                                                                                |
| Energy class          | D                                                                                                                                                                                 |
| IP class              | 40                                                                                                                                                                                |
| Dimensions            | 300x100x5cm                                                                                                                                                                       |
| Materials             | Aluminium                                                                                                                                                                         |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                     |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                       |
| Net lamp weight       | 8 kg                                                                                                                                                                              |

Codes

BZRO17A30G15NBO  
BZRO17A30G15NNE  
BZRO17A30G15NOR


Structure

white  
black  
gold

PACKAGE

Package 01  
Dimension: 310x100x15 cm / Gross weight: 16 kg

Certificazioni

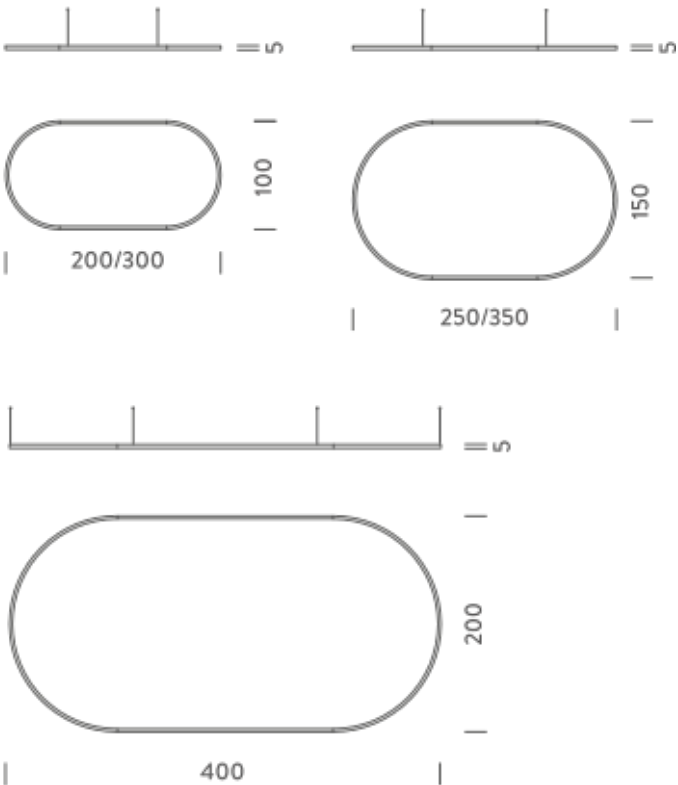

# 2,5X1,5M | DOWNLIGHT - 2700K

## LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 97W                                                                                                                                                                                   |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 2700K                                                                                                                                                                                 |
| Luminous flux         | 5589lm                                                                                                                                                                                |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 250x150x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment).<br>Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                            |
| Net lamp weight       | 7,3 kg                                                                                                                                                                                |

## Codes

BZRO16B25G15DBO  
BZRO16B25G15DNE  
BZRO16B25G15DOR


## Structure

white  
black  
gold

## PACKAGE

Package 01  
Dimension: 160x160x15 cm / Gross weight: 10,8 kg

## Certificazioni

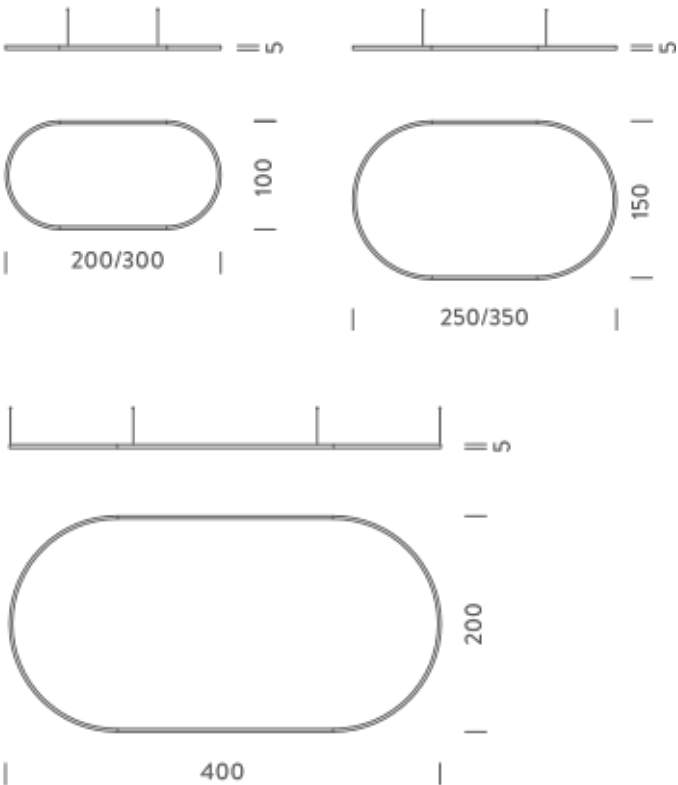

2,5X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 193W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 2700K                                                                                                                                                                               |
| Luminous flux         | 11179lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | E                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 250x150x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                     |
| Net lamp weight       | 8,1 kg                                                                                                                                                                              |

Codes

BZRO17B25G15DBO  
BZRO17B25G15DNE  
BZRO17B25G15DOR


Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 160x160x15 cm / Gross weight: 11,6 kg

Certificazioni

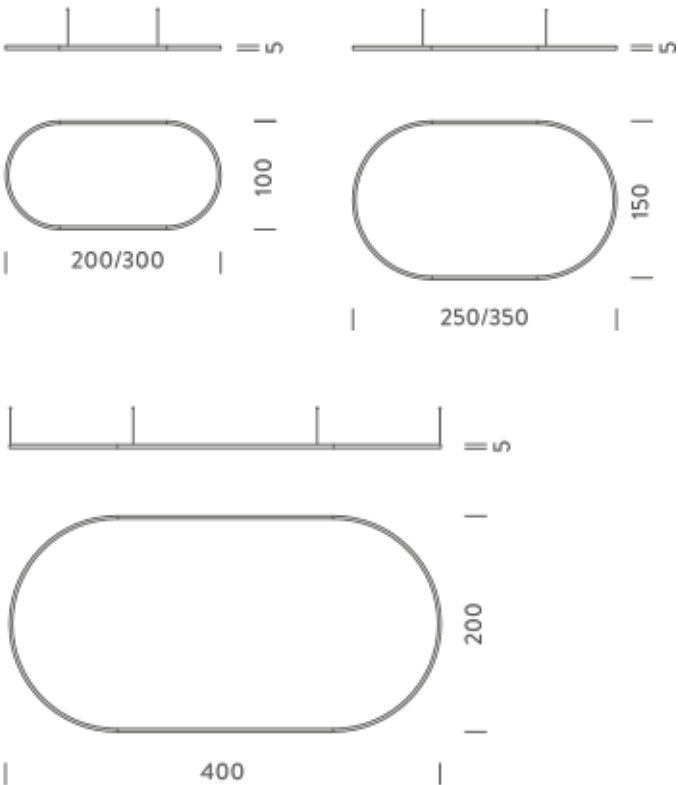

# 2,5X1,5M | DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 97W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 3000K                                                                                                                                                                                       |
| Luminous flux         | 5918lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | 250x150x5cm                                                                                                                                                                                 |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 6x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                               |
| Net lamp weight       | 7,3 kg                                                                                                                                                                                      |

## Codes

BZRO16B25G15WBO  
BZRO16B25G15WNE  
BZRO16B25G15WOR


## Structure

white  
black  
gold

## PACKAGE

Package 01  
Dimension: 160x160x15 cm / Gross weight: 10,8 kg

## Certificazioni

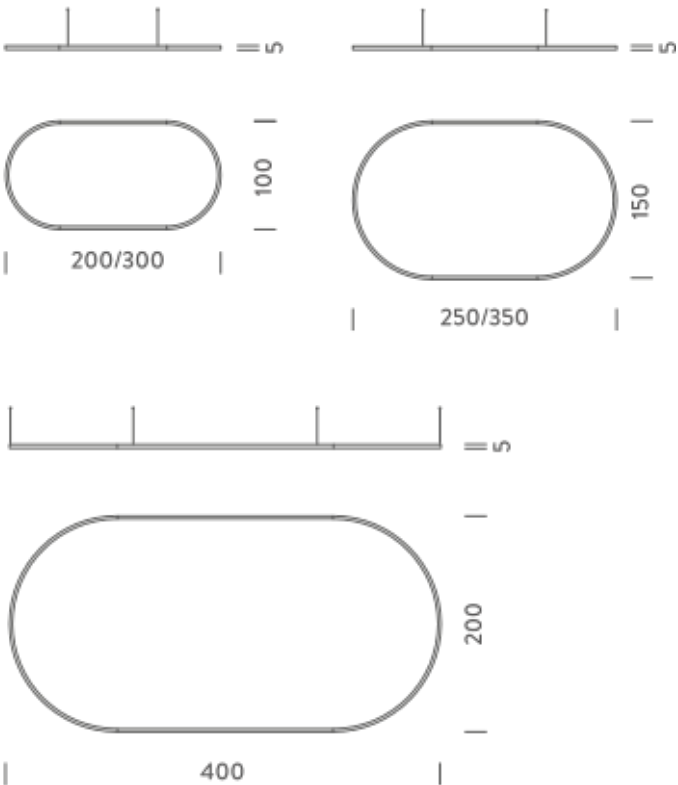

2,5X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 193W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 3000K                                                                                                                                                                               |
| Luminous flux         | 11836lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | E                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 250x150x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                     |
| Net lamp weight       | 8,1 kg                                                                                                                                                                              |

Codes

BZRO17B25G15WBO  
BZRO17B25G15WNE  
BZRO17B25G15WOR


Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 160x160x15 cm / Gross weight: 11,6 kg

Certificazioni

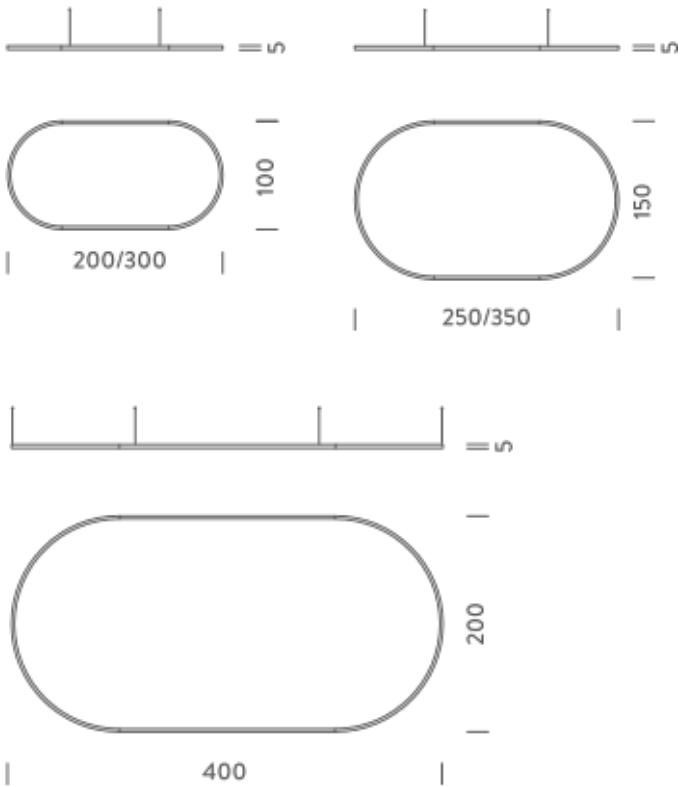

2,5X1,5M | DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 97W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 4000K                                                                                                                                                                                       |
| Luminous flux         | 6576lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | D                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | 250x150x5cm                                                                                                                                                                                 |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 6x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                               |
| Net lamp weight       | 7,3 kg                                                                                                                                                                                      |

Codes

BZRO16B25G15NBO  
BZRO16B25G15NNE  
BZRO16B25G15NOR


Structure

white  
black  
gold

PACKAGE

Package 01  
Dimension: 160x160x15 cm / Gross weight: 10,8 kg

Certificazioni

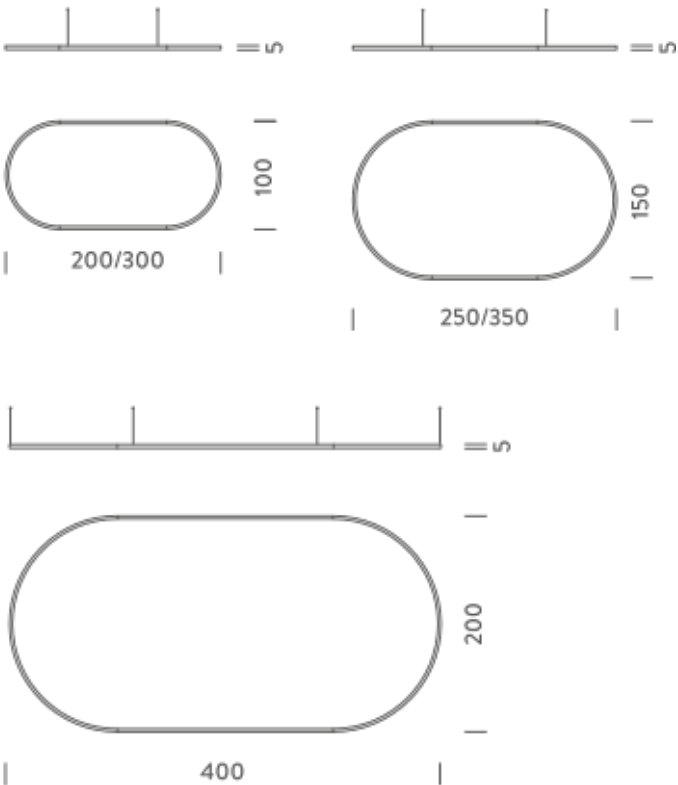

2,5X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 193W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 4000K                                                                                                                                                                               |
| Luminous flux         | 13152lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | D                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 250x150x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                     |
| Net lamp weight       | 8,1 kg                                                                                                                                                                              |

Codes

BZRO17B25G15NBO  
BZRO17B25G15NNE  
BZRO17B25G15NOR


Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 160x160x15 cm / Gross weight: 11,6 kg

Certificazioni

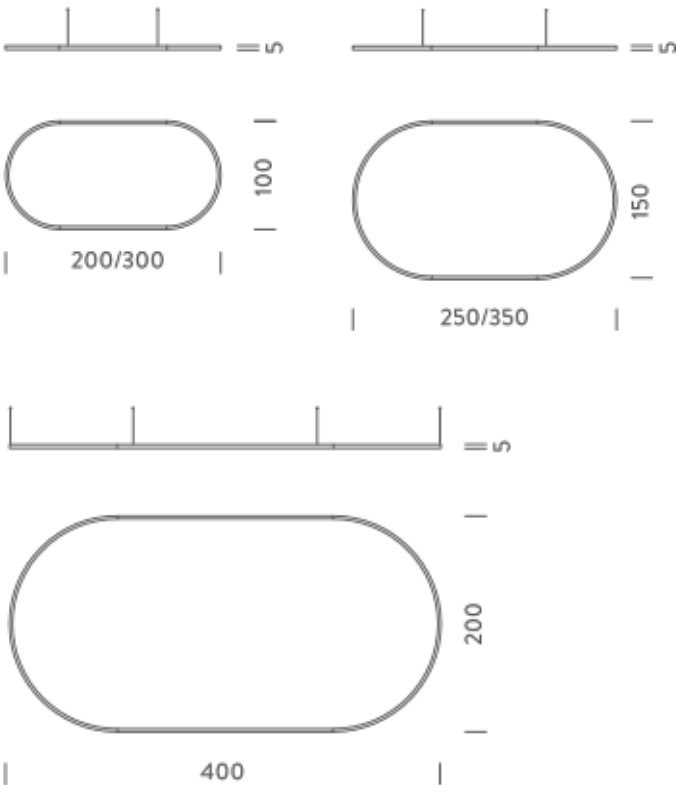

3,5X1,5M | DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 125W                                                                                                                                                                                        |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 2700K                                                                                                                                                                                       |
| Luminous flux         | 7255lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | 350x150x5cm                                                                                                                                                                                 |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 6x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                               |
| Net lamp weight       | 9,1 kg                                                                                                                                                                                      |

Codes

BZRO16B35G15DBO  
BZRO16B35G15DNE  
BZRO16B35G15DOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 14,5 kg

Certificazioni

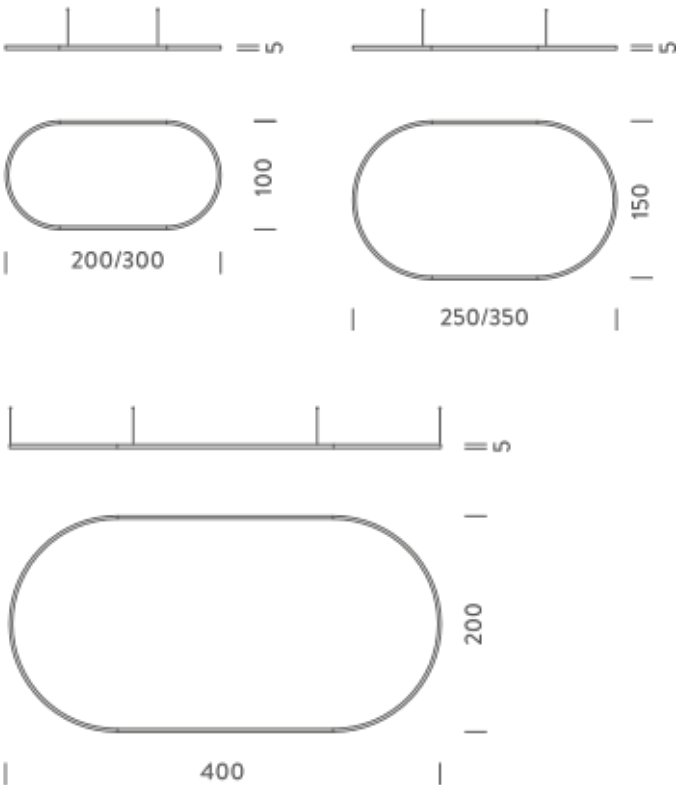

3,5X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 251W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 2700K                                                                                                                                                                                 |
| Luminous flux         | 1451lm                                                                                                                                                                                |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 350x150x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                       |
| Net lamp weight       | 9,9 kg                                                                                                                                                                                |

Codes

BZRO17B35G15DBO  
BZRO17B35G15DNE  
BZRO17B35G15DOR


Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 15,3 kg

Certificazioni

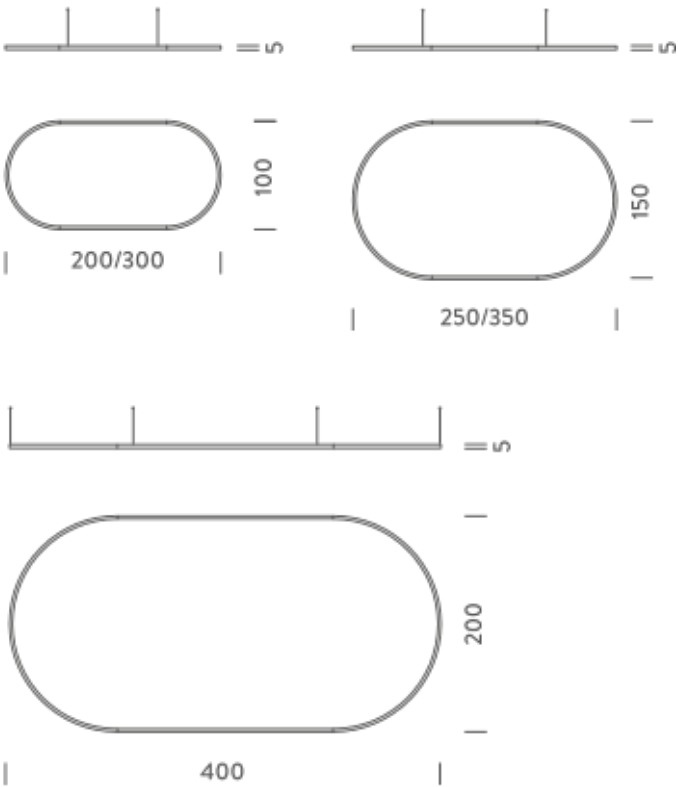

3,5X1,5M | DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 125W                                                                                                                                                                                        |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 3000K                                                                                                                                                                                       |
| Luminous flux         | 7682lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | 350x150x5cm                                                                                                                                                                                 |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 6x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                               |
| Net lamp weight       | 9,1 kg                                                                                                                                                                                      |

Codes

BZRO16B35G15WBO  
BZRO16B35G15WNE  
BZRO16B35G15WOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 14,5 kg

Certificazioni

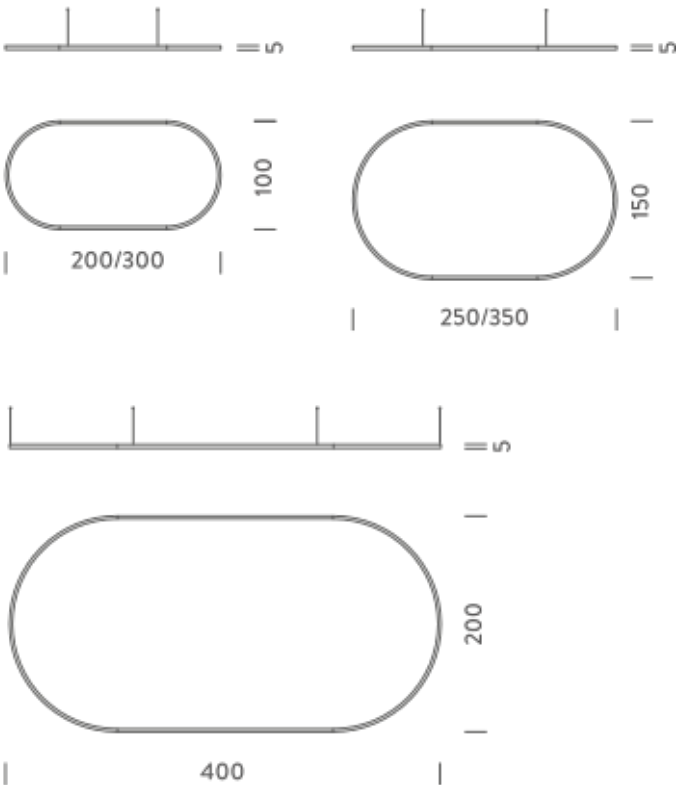

3,5X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 251W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 3000K                                                                                                                                                                                 |
| Luminous flux         | 15364lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 350x150x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                       |
| Net lamp weight       | 9,9 kg                                                                                                                                                                                |

Codes

BZRO17B35G15WBO  
BZRO17B35G15WNE  
BZRO17B35G15WOR


Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 15,3 kg

Certificazioni

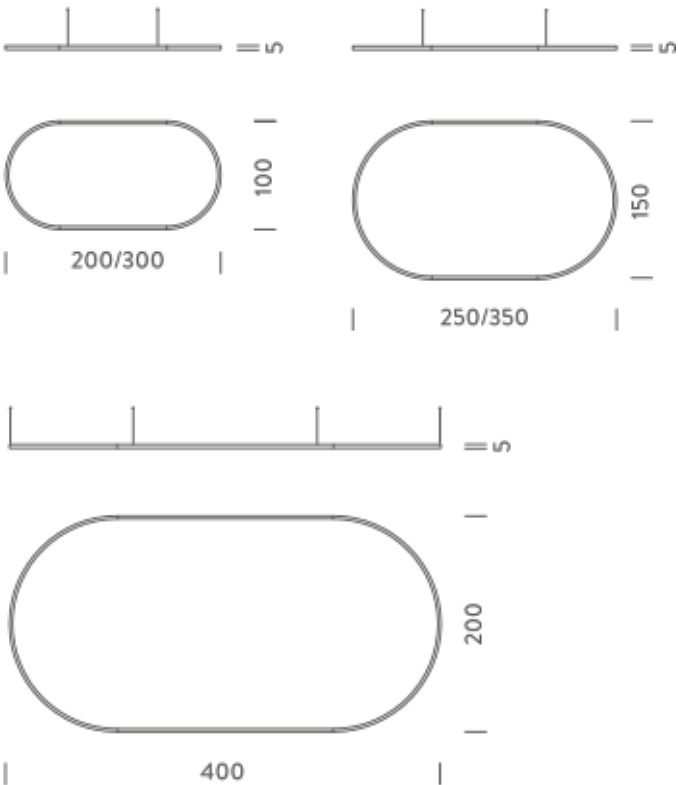

3,5X1,5M | DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 125W                                                                                                                                                                                        |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 4000K                                                                                                                                                                                       |
| Luminous flux         | 8536lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | D                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | 350x150x5cm                                                                                                                                                                                 |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: 1 driver WALIM150W24VIN, 1 dimmer interface<br>WDIMDALIHP, 1x electrical cable 5m, 6x adjustable<br>metal cables length 3m (including ceiling attachment).<br>Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1<br>electrical cable   Ceiling plate, for false ceiling                                                                               |
| Net lamp weight       | 9,1 kg                                                                                                                                                                                      |

Codes

BZRO16B35G15NBO  
BZRO16B35G15NNE  
BZRO16B35G15NOR


Structure

white  
black  
gold

PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 14,5 kg

Certificazioni

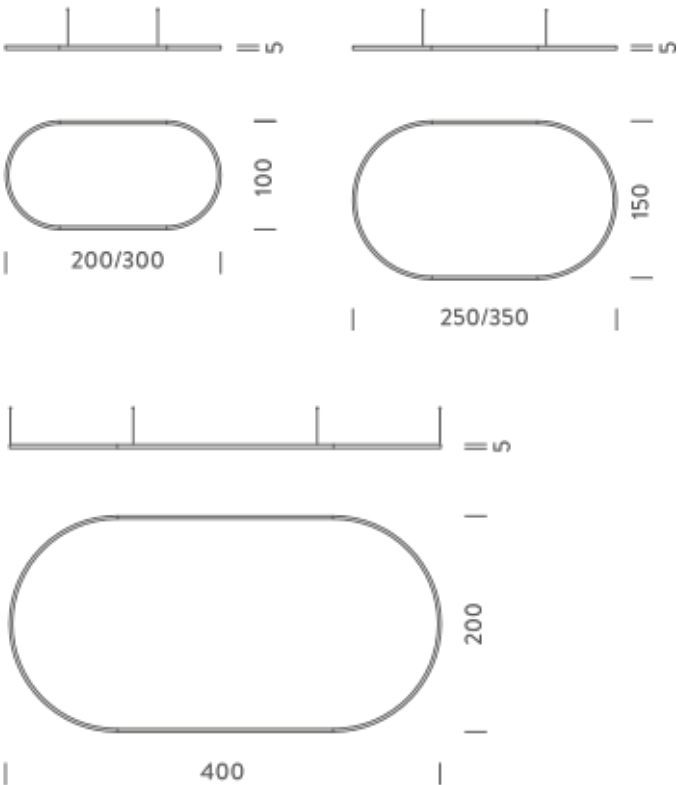

3,5X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 251W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 4000K                                                                                                                                                                                 |
| Luminous flux         | 17072lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | D                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 350x150x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                       |
| Net lamp weight       | 9,9 kg                                                                                                                                                                                |

Codes

BZRO17B35G15NBO  
BZRO17B35G15NNE  
BZRO17B35G15NOR


Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 15,3 kg

Certificazioni

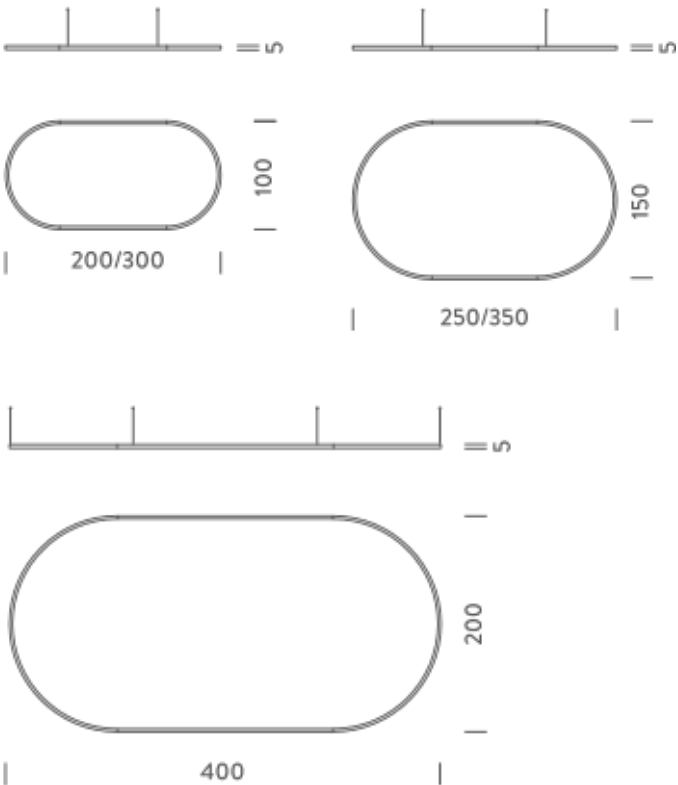

# 4X2M | DOWNLIGHT - 2700K

## LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 148W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 2700K                                                                                                                                                                               |
| Luminous flux         | 8536lm                                                                                                                                                                              |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | E                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 400x200x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                     |
| Net lamp weight       | 11,4 kg                                                                                                                                                                             |

## Codes

BZRO16C40G15DBO  
BZRO16C40G15DNE  
BZRO16C40G15DOR


## Structure

white  
black  
gold

## PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 16,8 kg

## Certificazioni

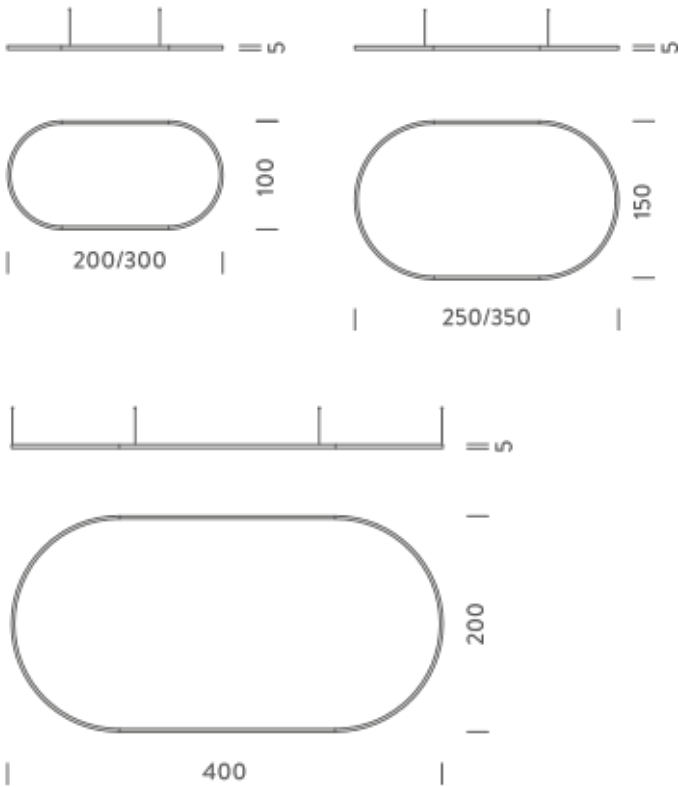

4X2M | UP - DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 296W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 2700K                                                                                                                                                                                 |
| Luminous flux         | 17126lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 400x200x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 2 driver2 WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                       |
| Net lamp weight       | 12,2 kg                                                                                                                                                                               |

Codes

BZRO17C40G15DBO  
BZRO17C40G15DNE  
BZRO17C40G15DOR


Structure


white  
black  
gold

PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 17,6 kg

Certificazioni

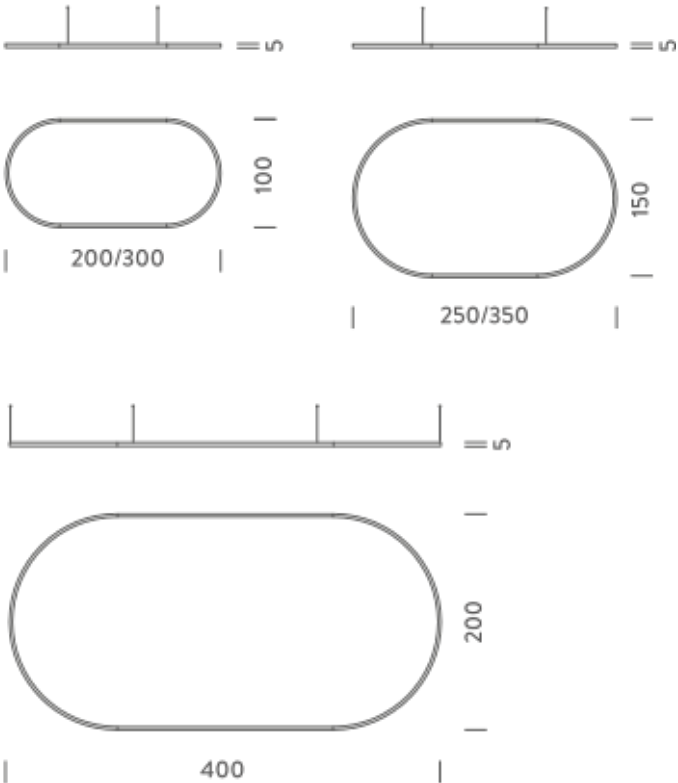

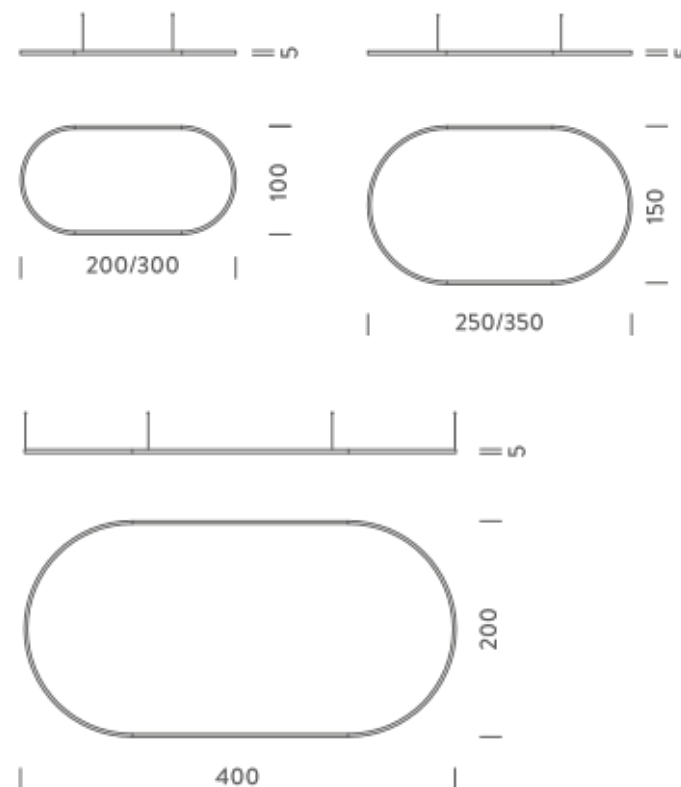

# 4X2M | UP - DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 296W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 3000K                                                                                                                                                                                 |
| Luminous flux         | 18134lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 400x200x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                       |
| Net lamp weight       | 12,2 kg                                                                                                                                                                               |

## Codes

BZRO17C40G15WBO  
BZRO17C40G15WNE  
BZRO17C40G15WOR


## Structure

white  
black  
gold

## PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 17,6 kg

## Certificazioni

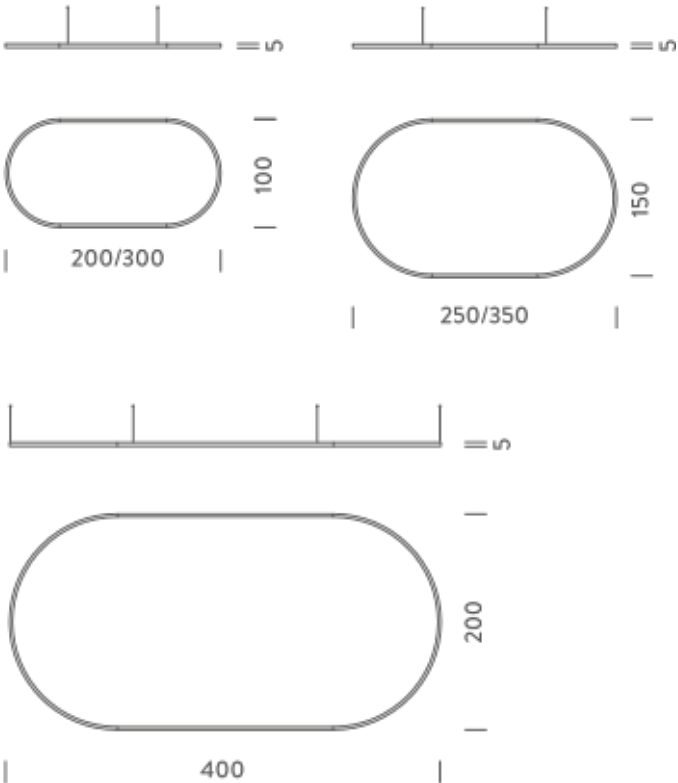

# 4X2M | DOWNLIGHT - 4000K

## LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 148W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 4000K                                                                                                                                                                               |
| Luminous flux         | 10074lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | D                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | 400x200x5cm                                                                                                                                                                         |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                     |
| Net lamp weight       | 11,4 kg                                                                                                                                                                             |

## Codes

BZRO16C40G15NBO  
BZRO16C40G15NNE  
BZRO16C40G15NOR


## Structure

white  
black  
gold

## PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 16,8 kg

## Certificazioni

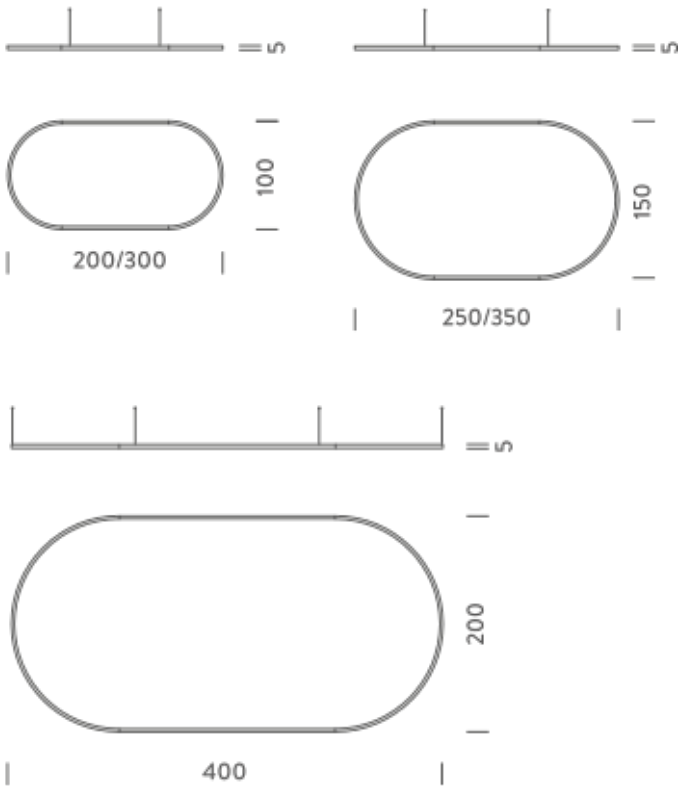

4X2M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 296W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100V                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 4000K                                                                                                                                                                                 |
| Luminous flux         | 20149lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | D                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | 400x200x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                       |
| Net lamp weight       | 12,2 kg                                                                                                                                                                               |

Codes

BZRO17C40G15NBO  
BZRO17C40G15NNE  
BZRO17C40G15NOR

Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 210x110x15 cm / Gross weight: 17,6 kg

Certificazioni

