


# ZIRKOL SQUARE

ZIRKOL – S è una famiglia di lampade poligonali a sospensione ideale per l'illuminazione generale e decorativa di ambienti.

Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione omogenea.

L'emissione di luce può essere diretta o bi-emissione con alto flusso luminoso e con tre differenti temperature colore. Driver remoto e dimmer interface inclusi.

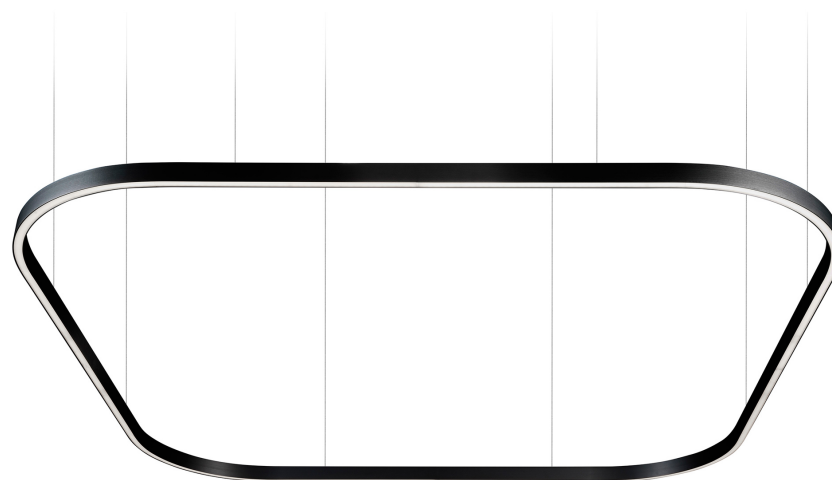

# 1,5X1,5M | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	4432lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1606G15DBO  
BZRQ1606G15DNE  
BZRQ1606G15DOR


## PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO 3.000

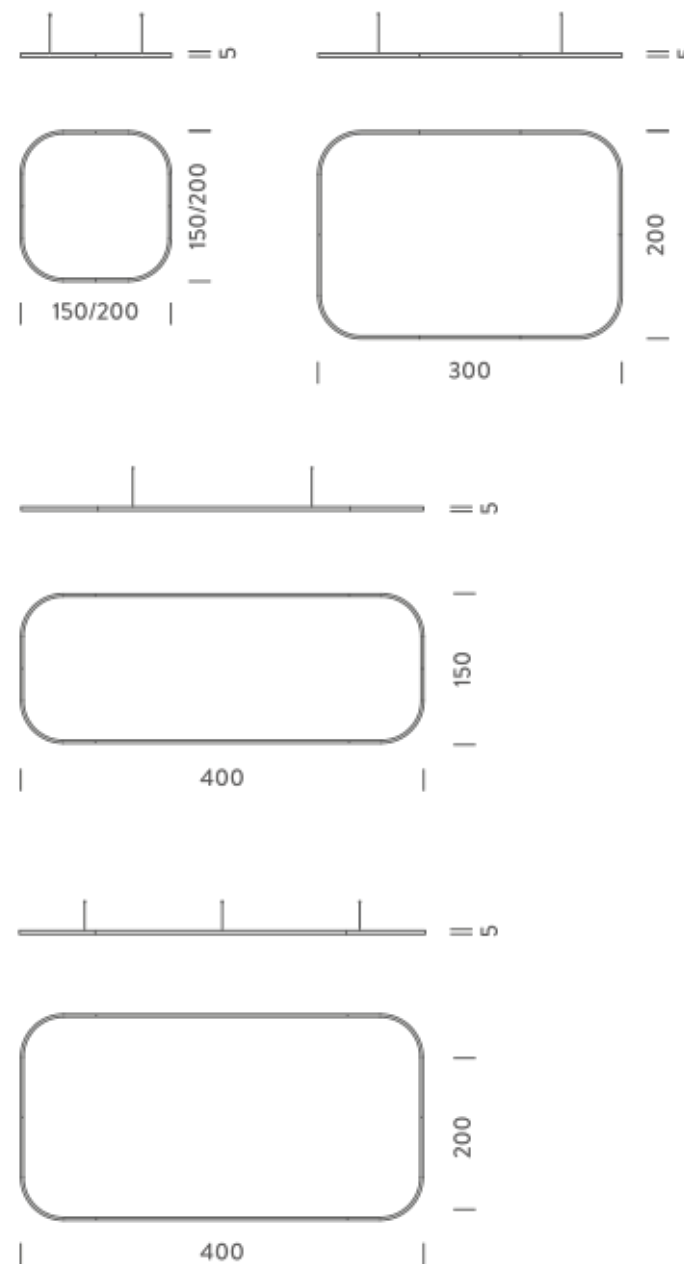

# 1,5X1,5M | UP - DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8863lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	

included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled

## Customization options

Shapes, sizes

## Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

## Net lamp weight

6,1 kg

## Codes

BZRQ1712G15DBO  
BZRQ1712G15DNE  
BZRQ1712G15DOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO 3.000

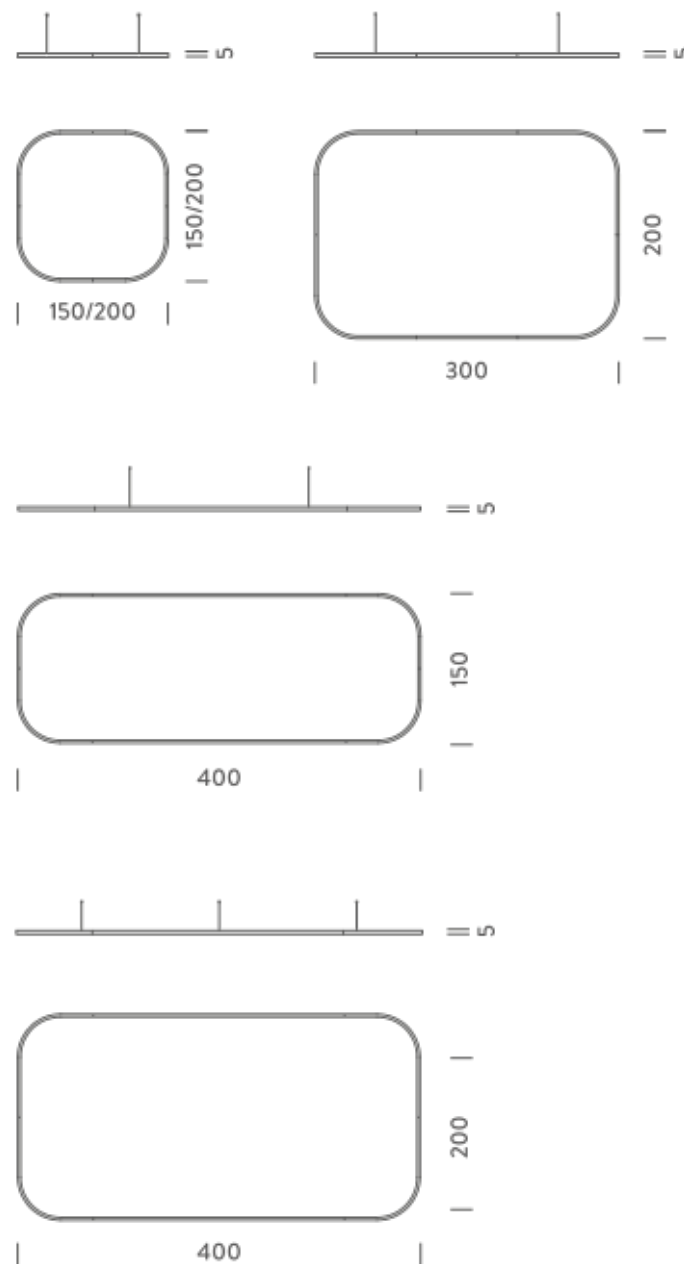

# 1,5X1,5M | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4692lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1606G15WBO  
BZRQ1606G15WNE  
BZRQ1606G15WOR


## PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO<sup>3.000</sup>

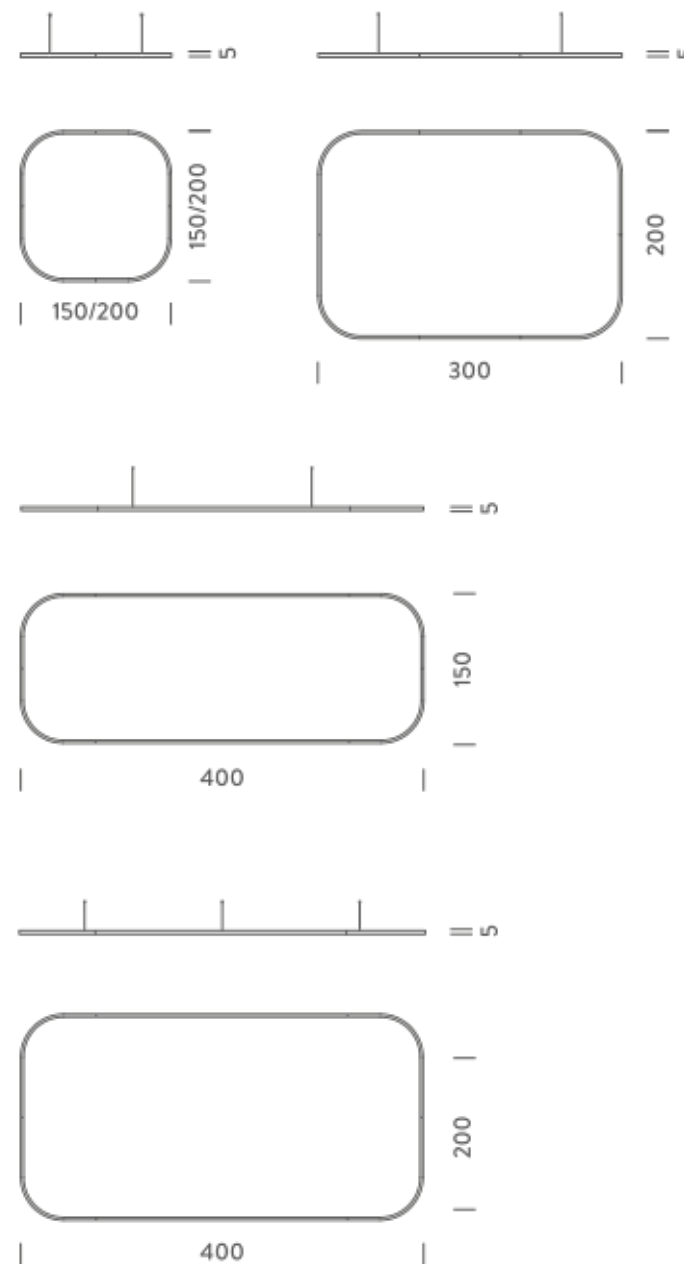

# 1,5X1,5M | UP - DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9384lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	

included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled

## Customization options

Shapes, sizes

## Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

## Net lamp weight

6,1 kg

## Codes

BZRQ1712G15WBO

BZRQ1712G15WNE

BZRQ1712G15WOR

## Structure

white

black

gold

## PACKAGE


Package 01

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO 3.000

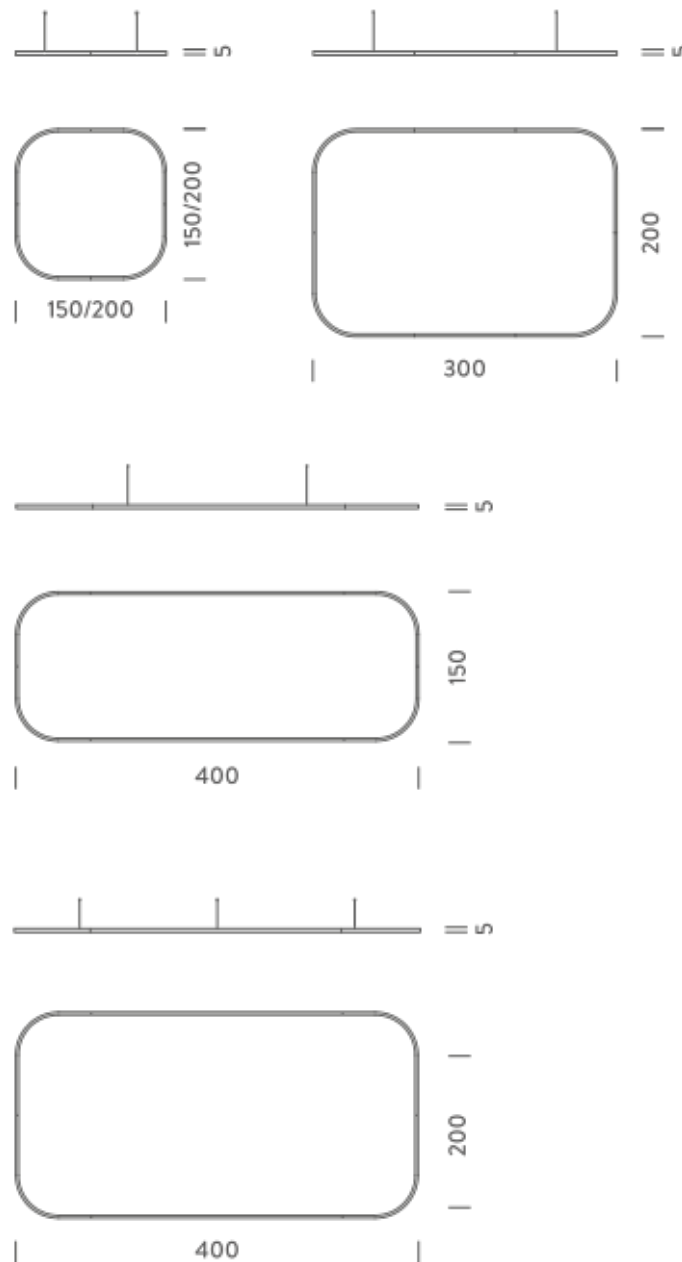

# 1,5X1,5M | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	5214lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1606G15NBO  
BZRQ1606G15NNE  
BZRQ1606G15NOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

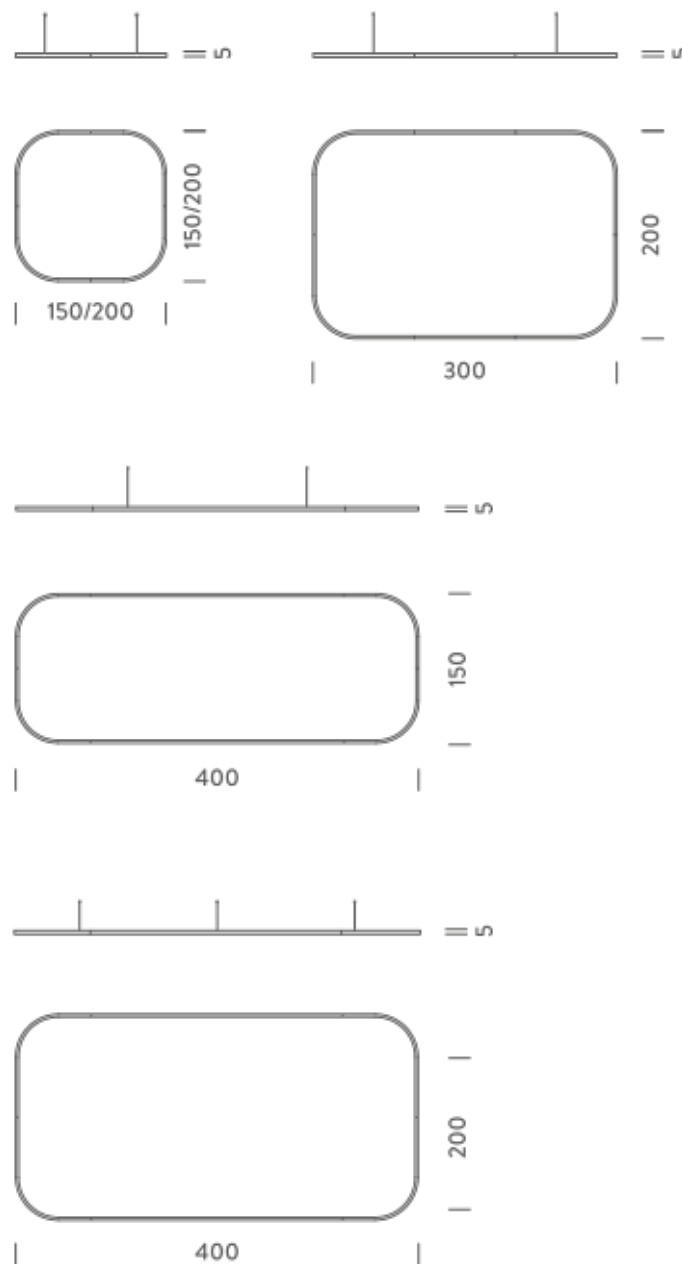

## Certificazioni



NEMO 3.000

# 1,5X1,5M | UP - DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10427lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1712G15NBO  
BZRQ1712G15NNE  
BZRQ1712G15NOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

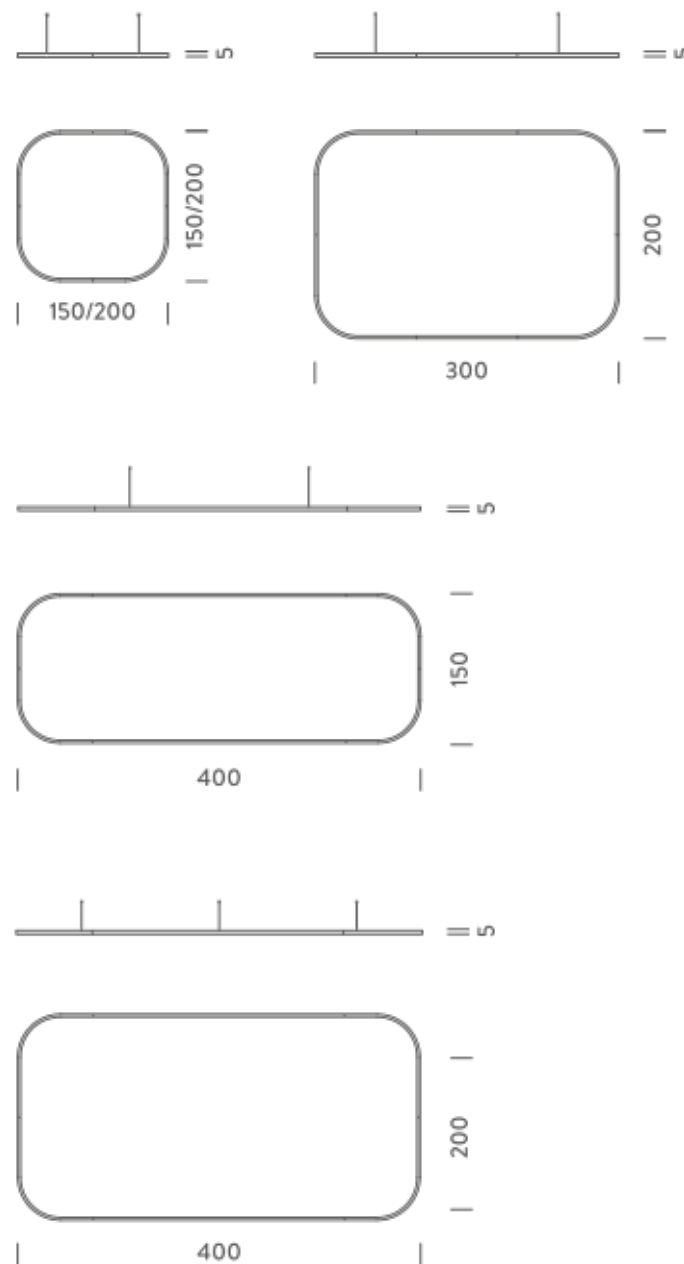

## Certificazioni



NEMO s.p.a.

## 2X2M | DOWNLIGHT - 2700KE

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	6098lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

### Codes

BZRQ1608G15DBO  
BZRQ1608G15DNE  
BZRQ1608G15DOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

### Certificazioni



NEMO<sup>3.000</sup>

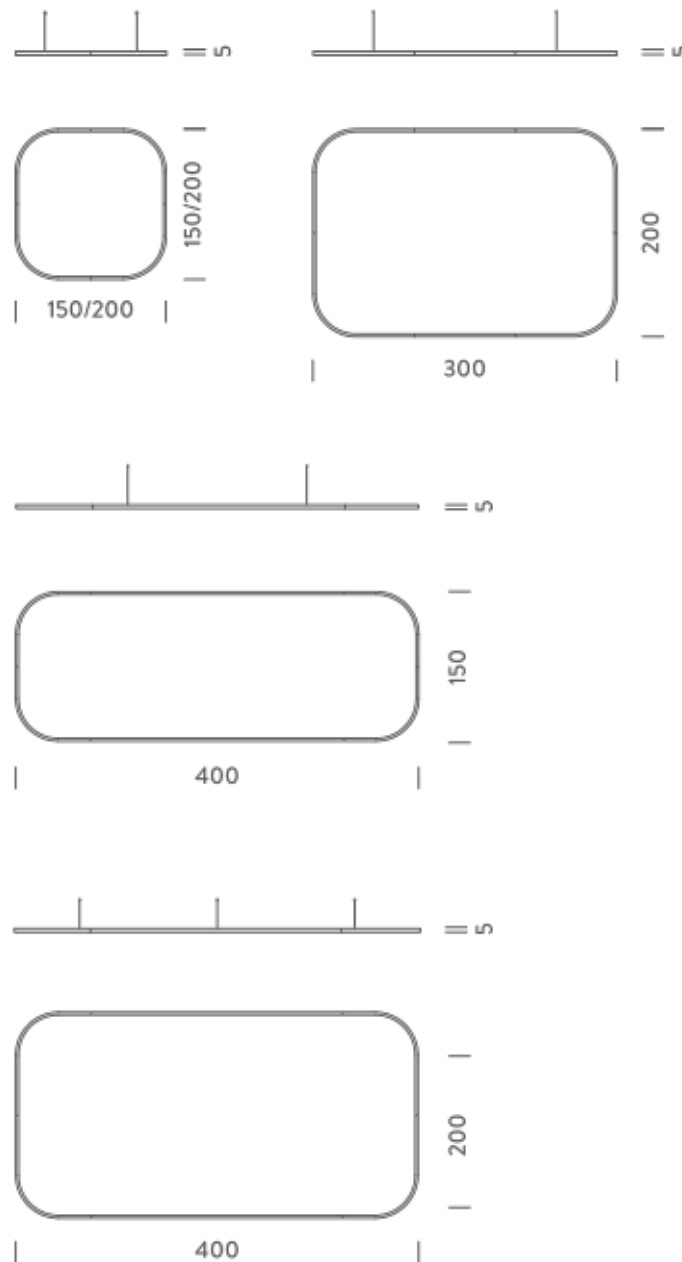



## 2X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	12195lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1716G15DBO  
BZRQ1716G15DNE  
BZRQ1716G15DOR

Shapes, sizes  
Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

### Structure

white  
black  
gold

### PACKAGE


### Package 01

Dimension: 210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO<sup>3.000</sup>

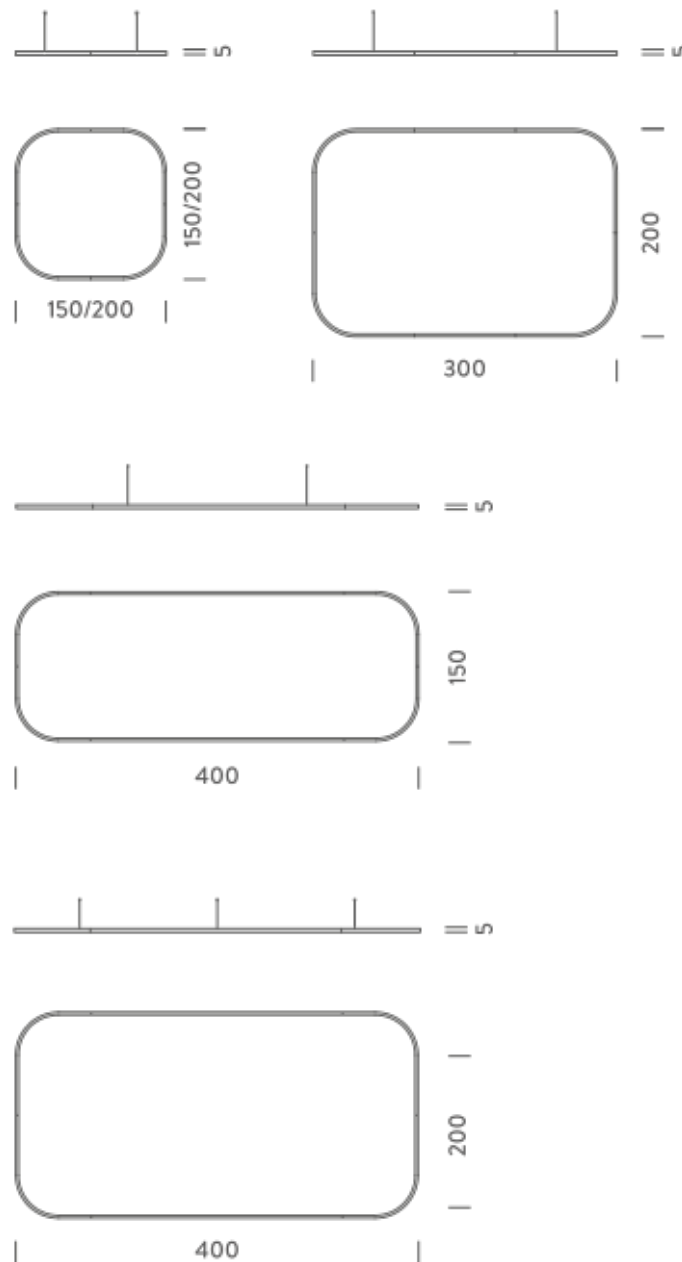

## 2X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	6456lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

### Codes

BZRQ1608G15WBO  
BZRQ1608G15WNE  
BZRQ1608G15WOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

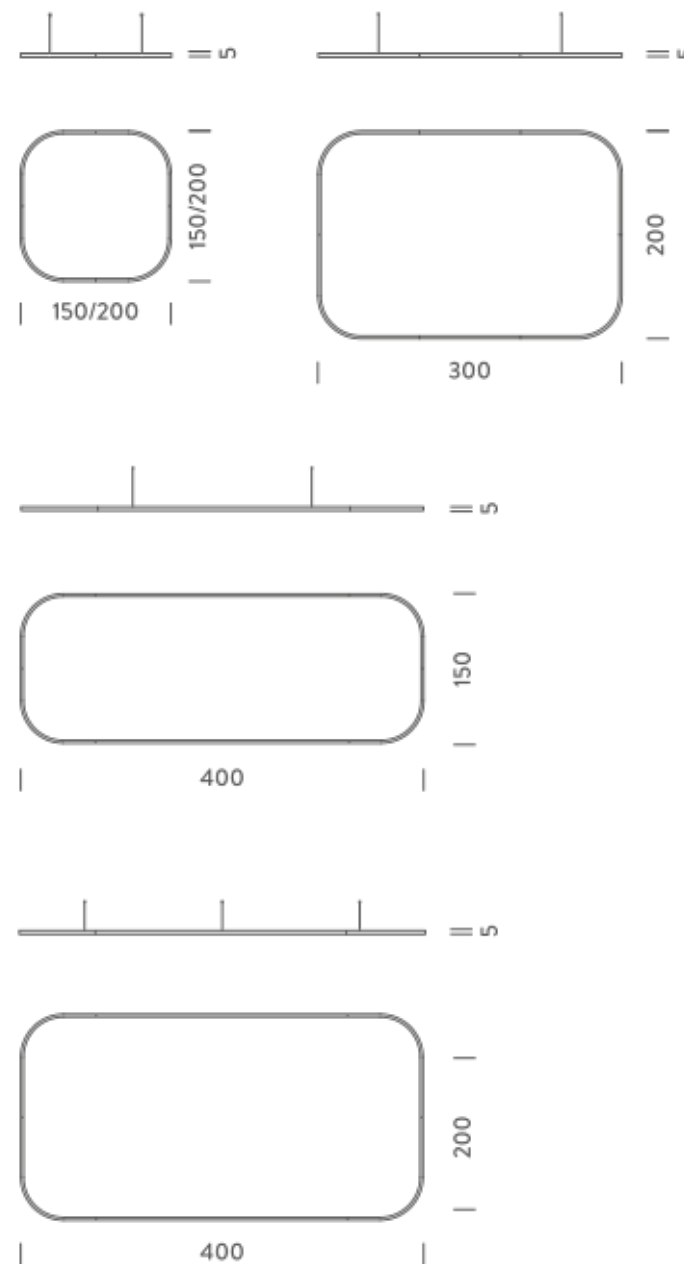

## 2X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	12912lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRQ1716G15WBO  
BZRQ1716G15WNE  
BZRQ1716G15WOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO s.p.a.

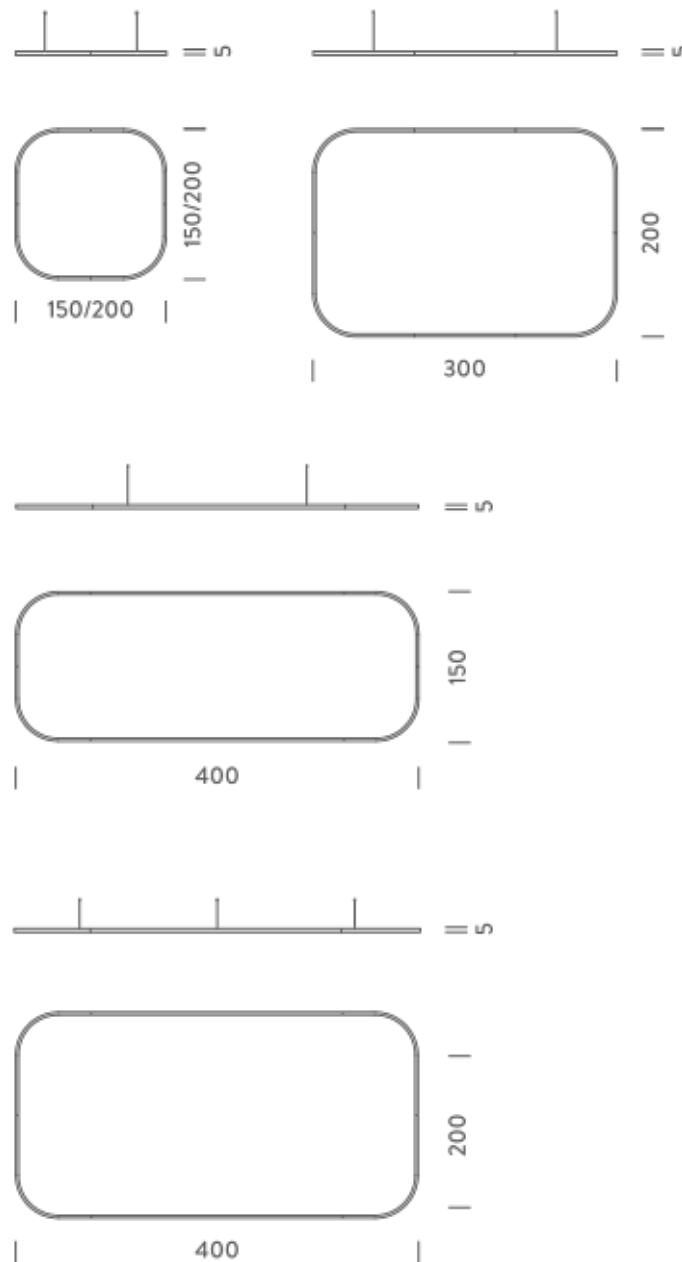

## 2X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	7174lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

### Codes

BZRQ1608G15NBO  
BZRQ1608G15NNE  
BZRQ1608G15NOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

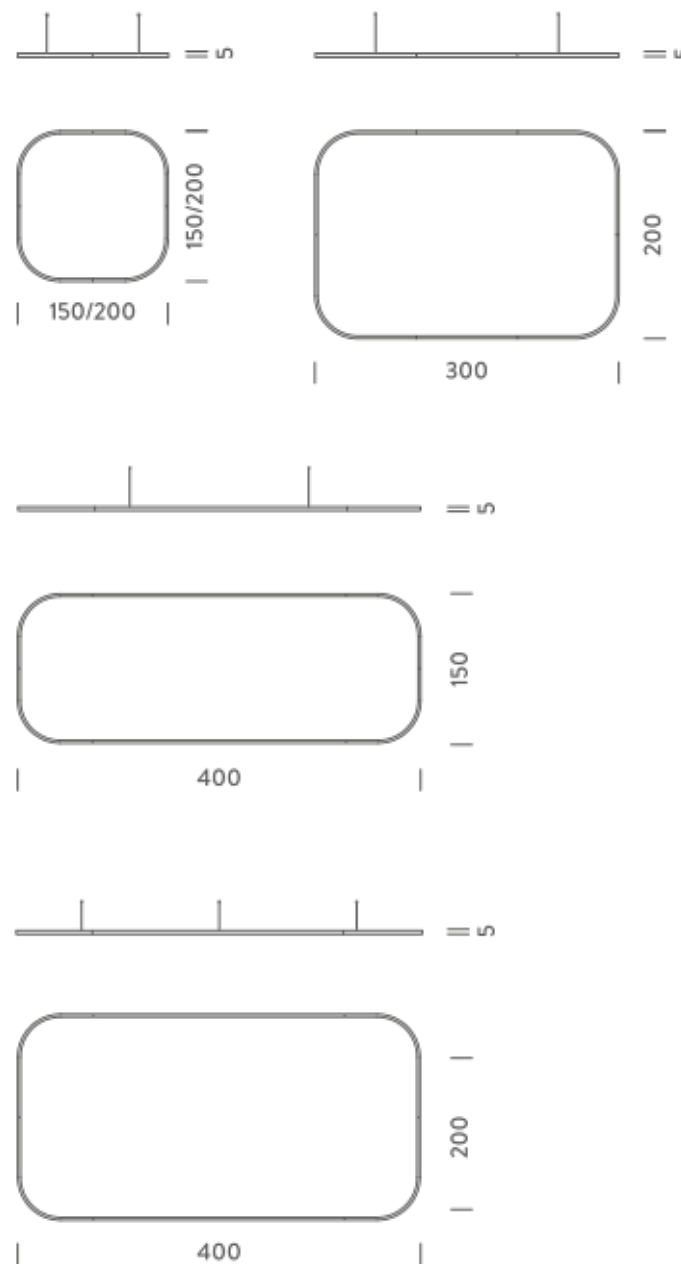

## 2X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	14347lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1716G15NBO  
BZRQ1716G15NNE  
BZRQ1716G15NOR

### PACKAGE


Package 01

Structure	white black gold
Dimension: 210x110x15 cm / Gross weight: 13,5 kg	

### Certificazioni



NEMO<sup>3.000</sup>

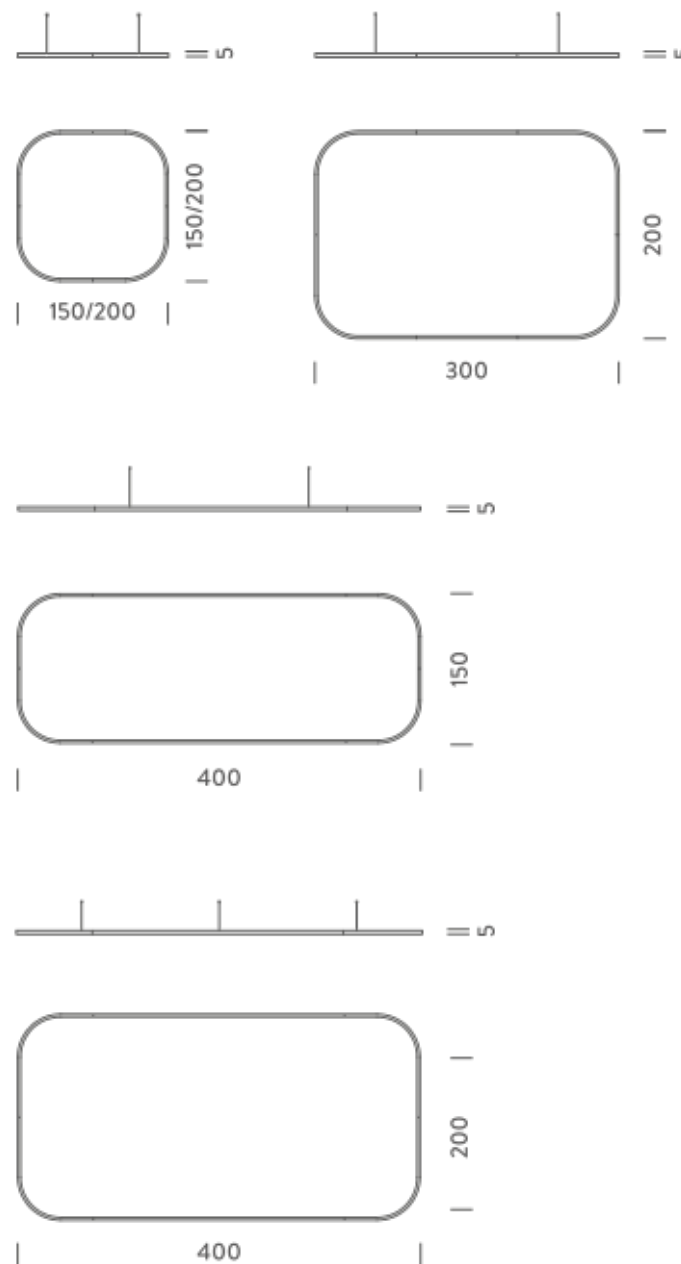

# 3X2M | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	7764lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

## Codes

BZRQ1610G15DBO  
BZRQ1610G15DNE  
BZRQ1610G15DOR


## PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,9 kg

## Certificazioni



NEMO<sup>3.000</sup>

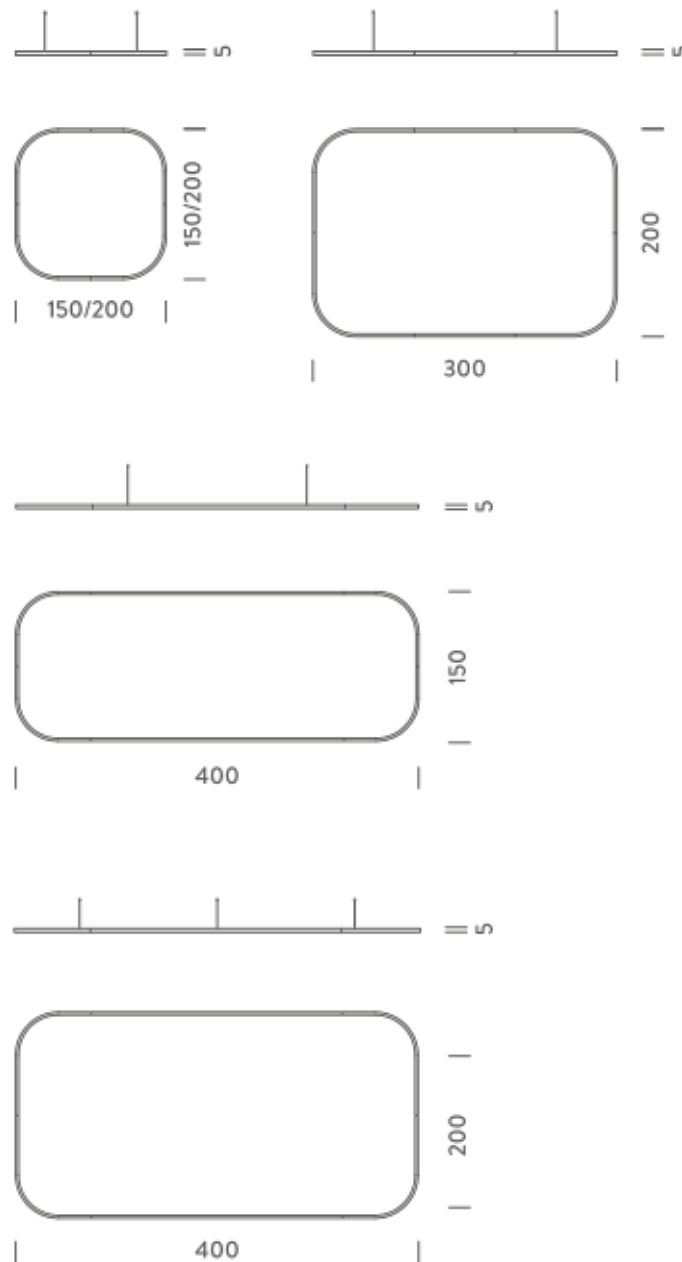

## 3X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	15527lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15DBO  
BZRQ1720G15DNE  
BZRQ1720G15DOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni



NEMO<sup>3.000</sup>

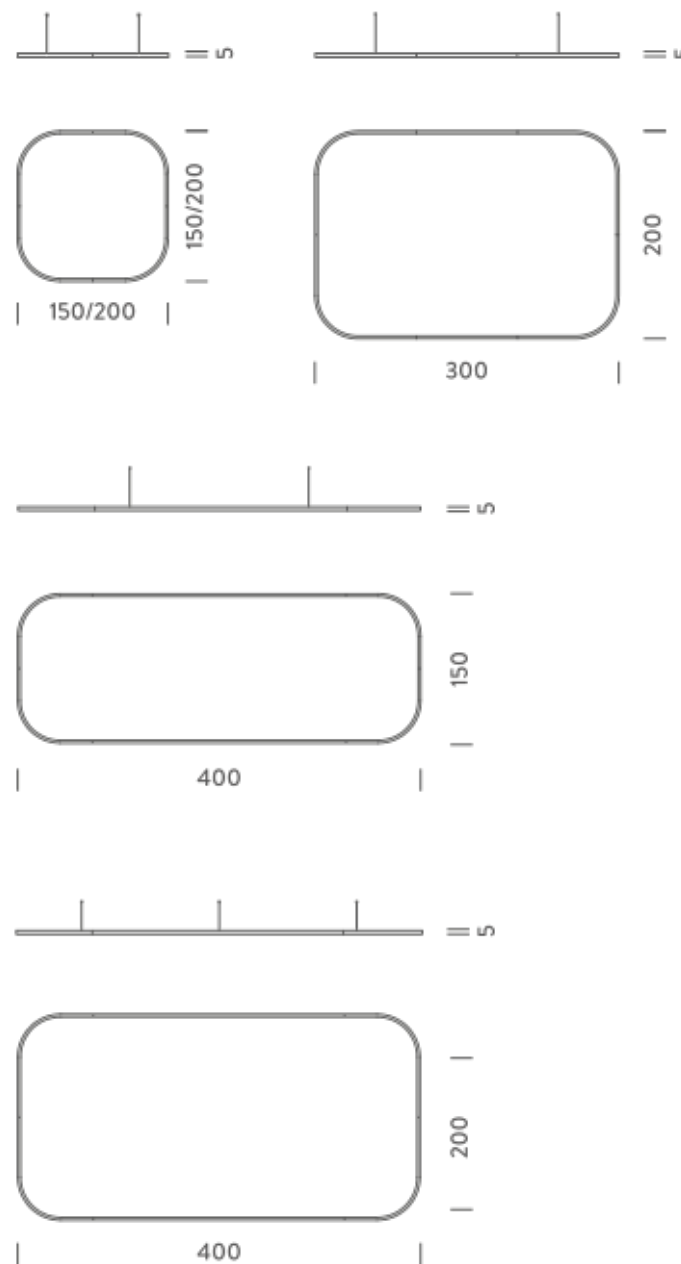

## 3X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	8220lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRQ1610G15WBO  
BZRQ1610G15WNE  
BZRQ1610G15WOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,9 kg

### Certificazioni



NEMO<sup>3,000</sup>

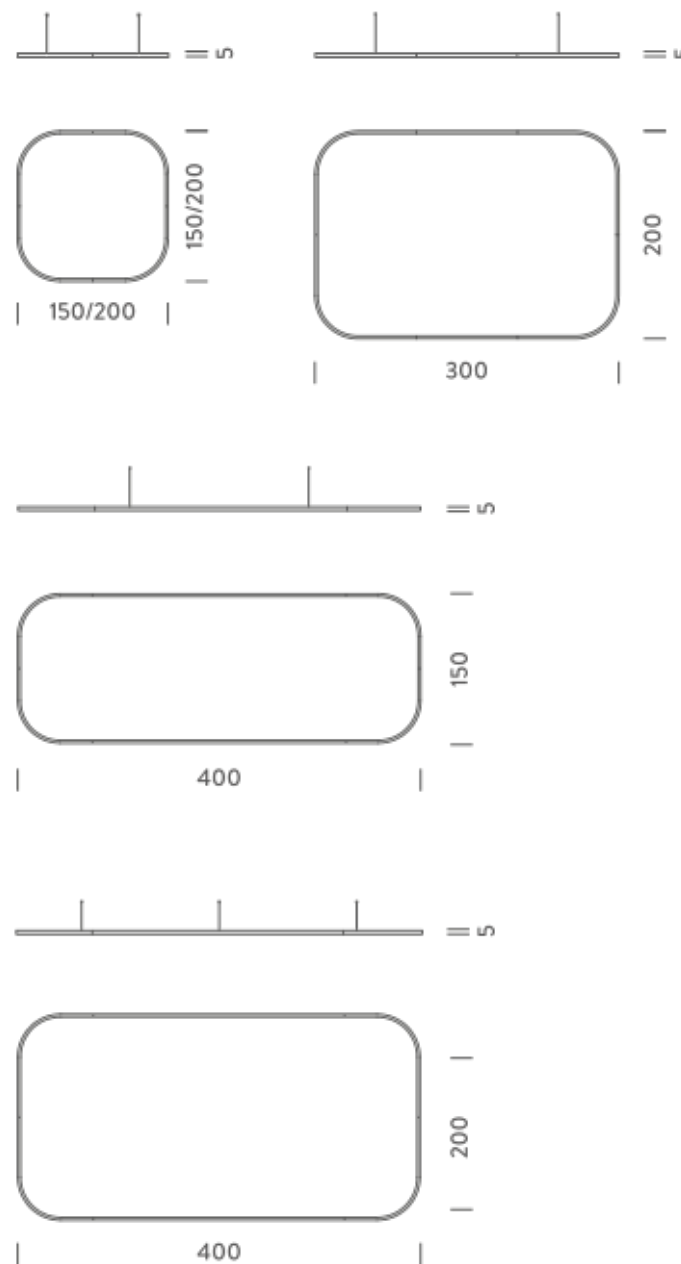



## 3X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	16440lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15WBO  
BZRQ1720G15WNE  
BZRQ1720G15WOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni



NEMO

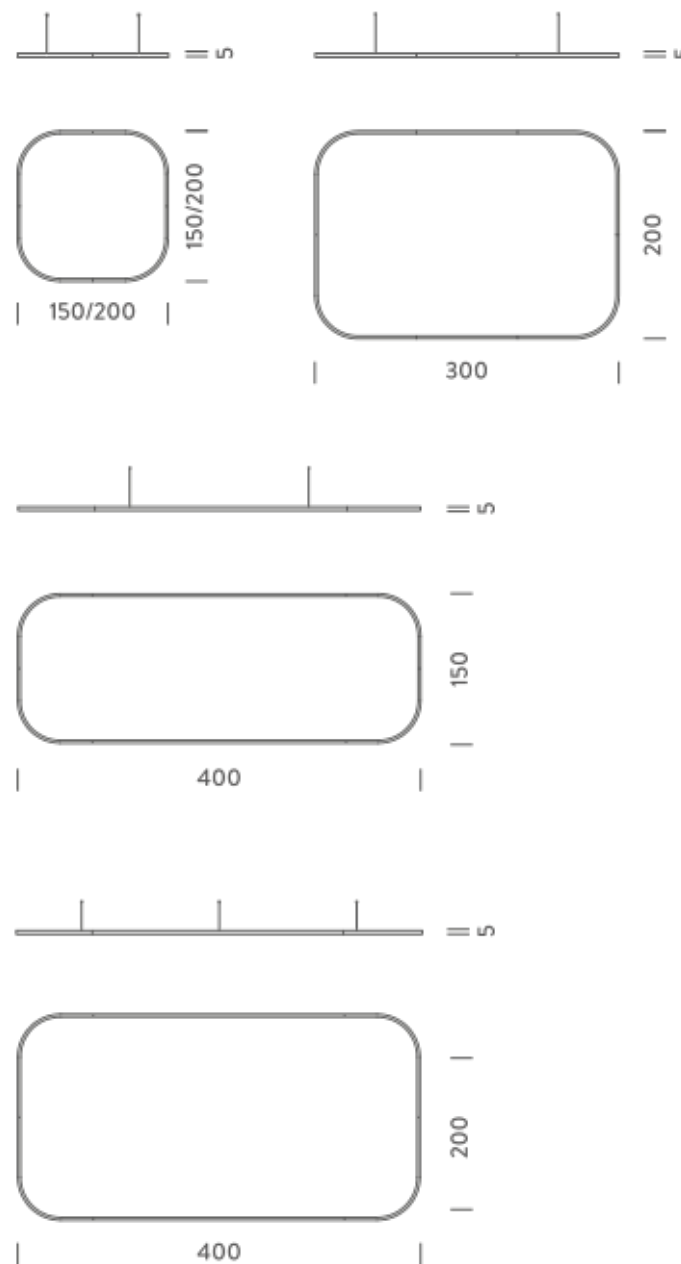

## 3X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	9134lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1610G15NBO  
BZRQ1610G15NNE  
BZRQ1610G15NOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 17,9 kg

### Certificazioni



NEMO<sup>3.000</sup>

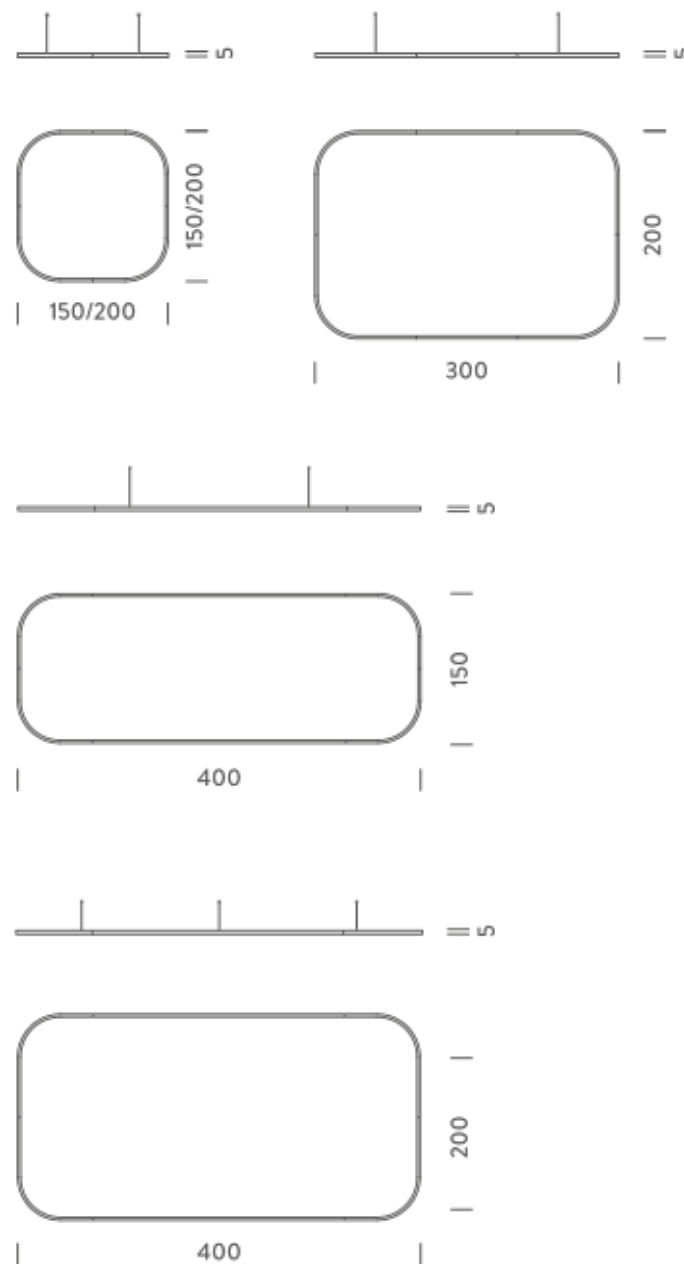

## 3X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	18267lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15NBO

BZRQ1720G15NNE

BZRQ1720G15NOR

### PACKAGE

Package 01

### Structure

white

black


gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni



NEMO<sup>3.000</sup>

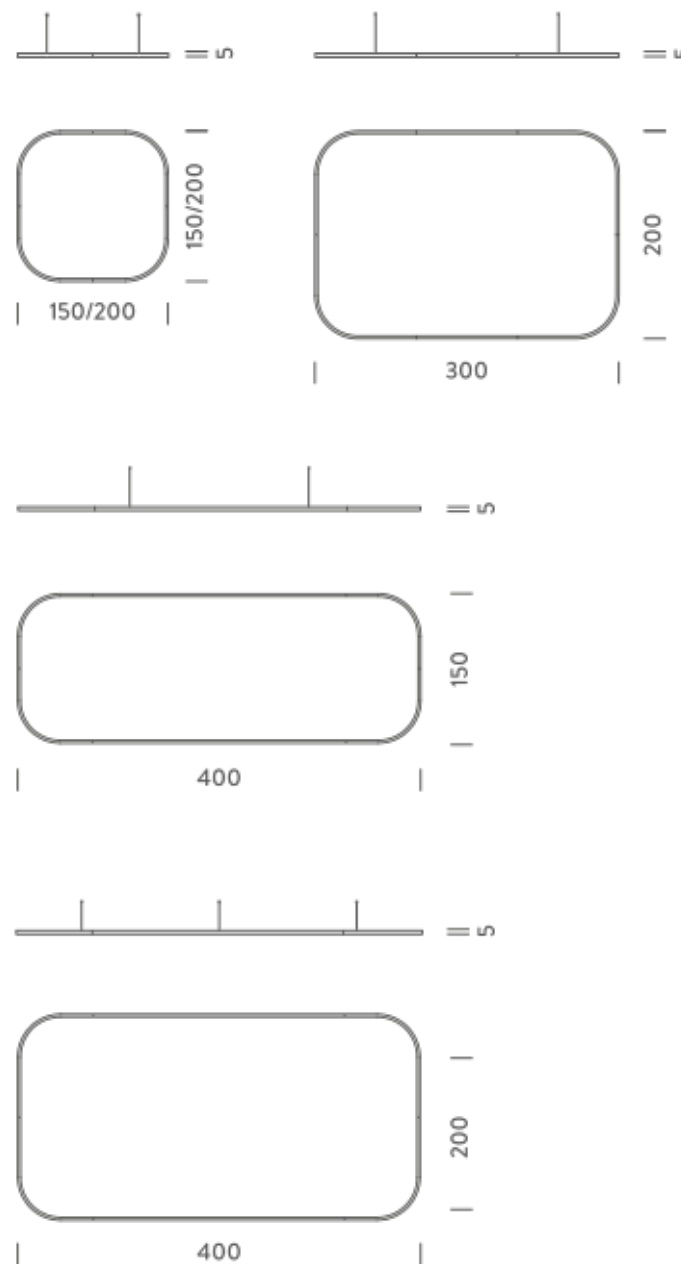

## 4X1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8597lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

### Codes

BZRQ1611G15DBO

BZRQ1611G15DNE

BZRQ1611G15DOR

### PACKAGE

Package 01

### Structure


white

black

gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

### Certificazioni

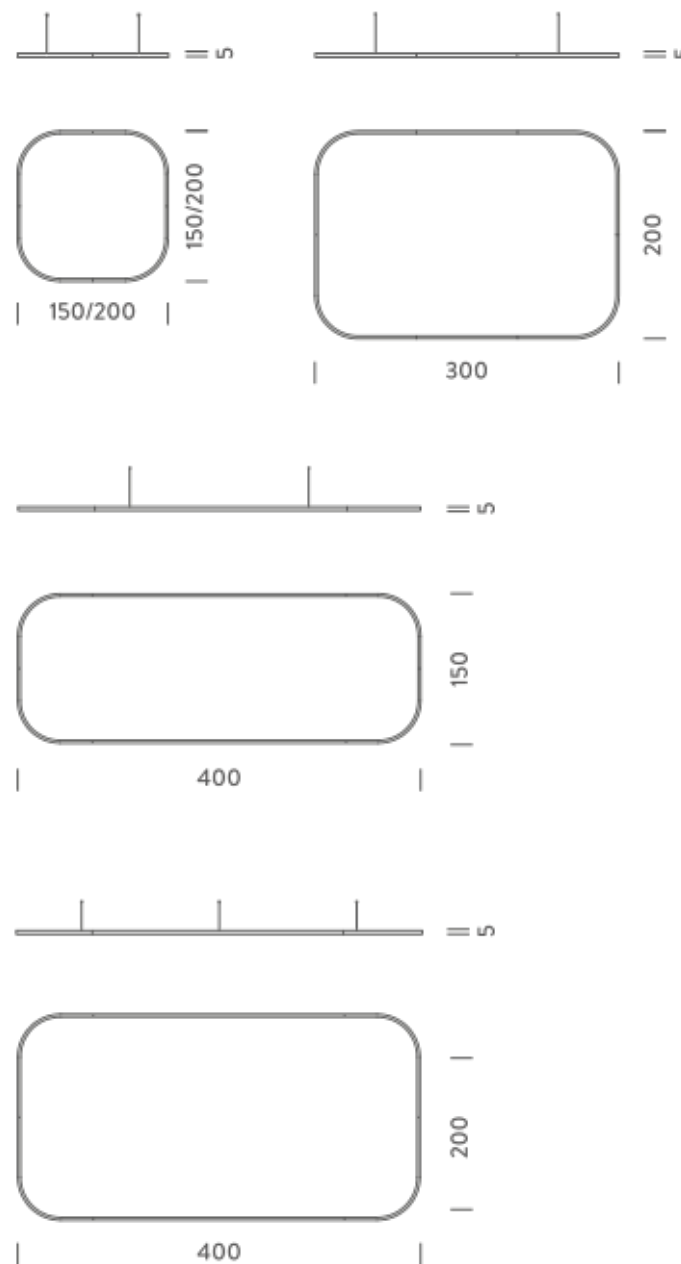

## 4X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	17193lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1722G15DBO  
BZRQ1722G15DNE  
BZRQ1722G15DOR

### PACKAGE

Package 01

### Shapes, sizes


Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

12,1 kg

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

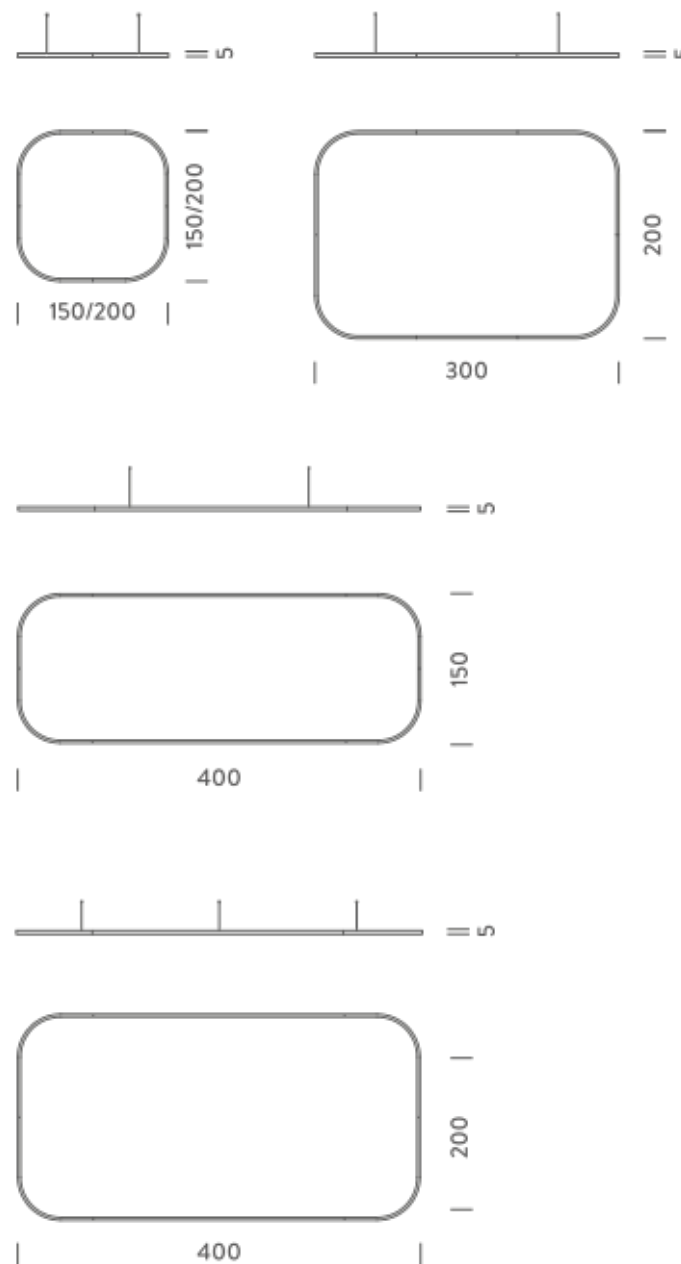

### Certificazioni



NEMO<sup>3.000</sup>

## 4X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9102lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

### Codes

BZRQ1611G15WBO  
BZRQ1611G15WNE  
BZRQ1611G15WOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

### Certificazioni

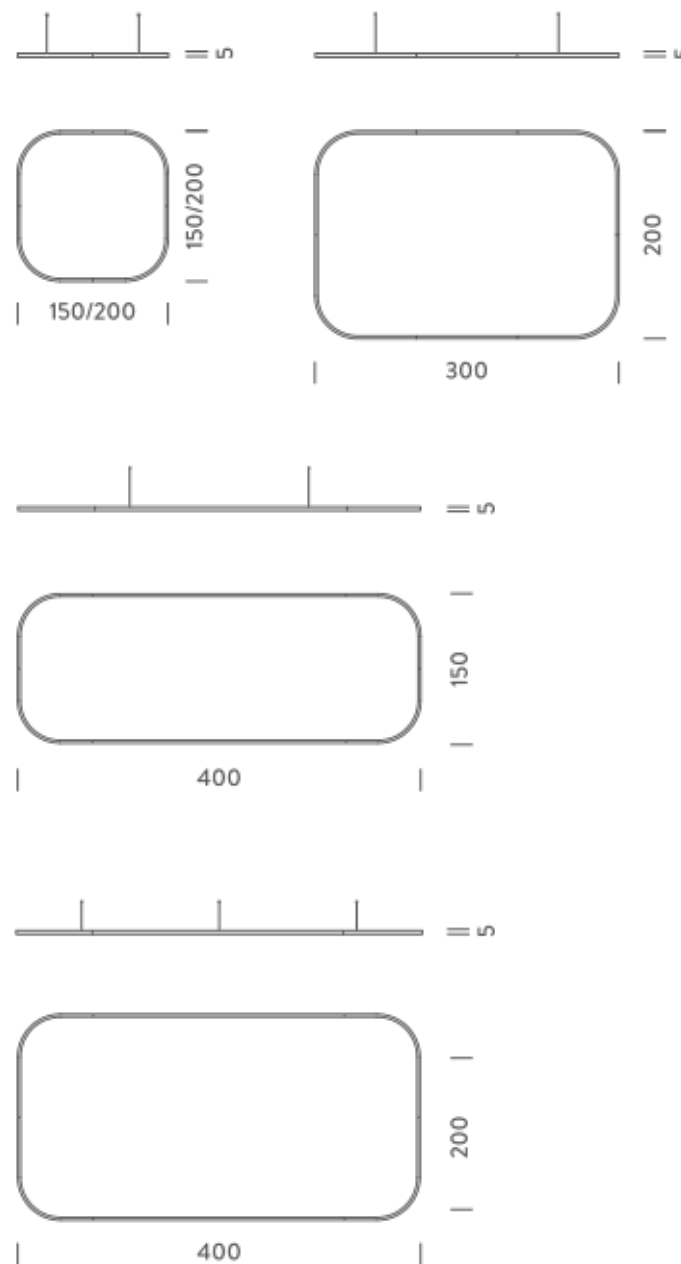

## 4X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	18204lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

### Codes

BZRQ1722G15WBO  
BZRQ1722G15WNE  
BZRQ1722G15WOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

### Certificazioni



NEMO<sup>3.000</sup>

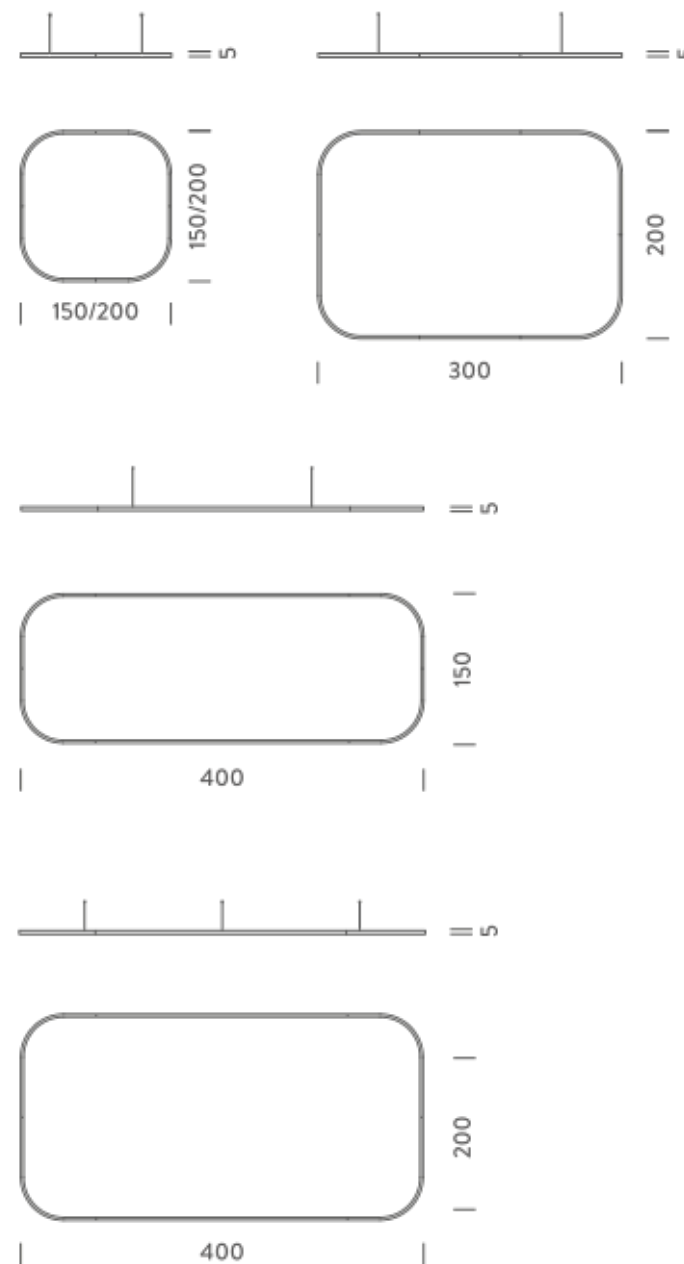

## 4X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10114lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

### Codes

BZRQ1611G15NBO  
BZRQ1611G15NNE  
BZRQ1611G15NOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

### Certificazioni

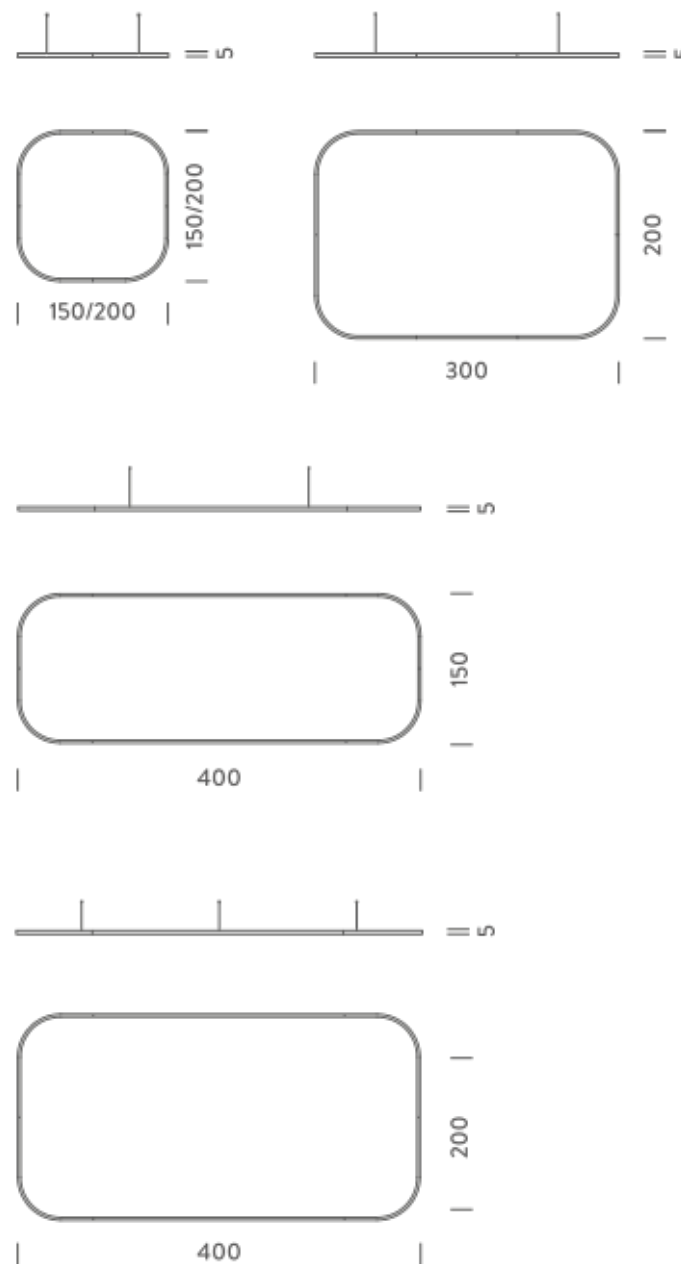



## 4X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	20227lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

### Codes

BZRQ1722G15NBO  
BZRQ1722G15NNE  
BZRQ1722G15NOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

### Certificazioni



NEMO<sup>3.000</sup>

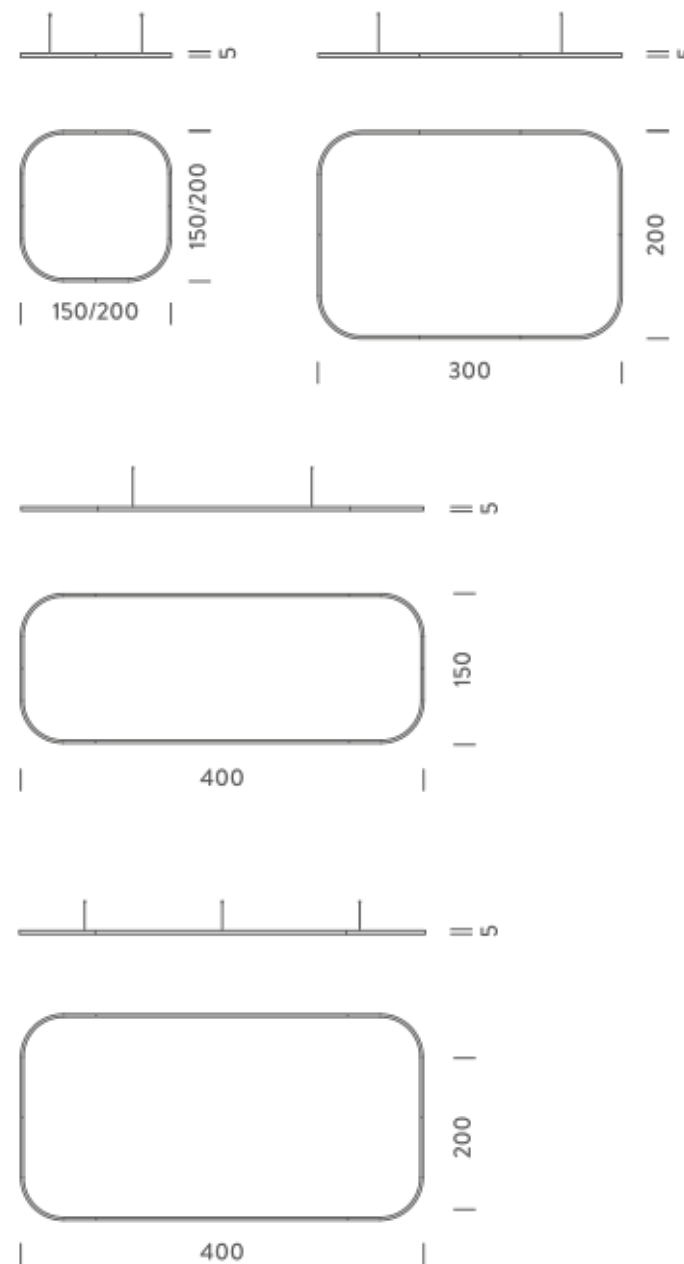

## 4X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	9430lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

### Codes

BZRQ1612G15DBO  
BZRQ1612G15DNE  
BZRQ1612G15DOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

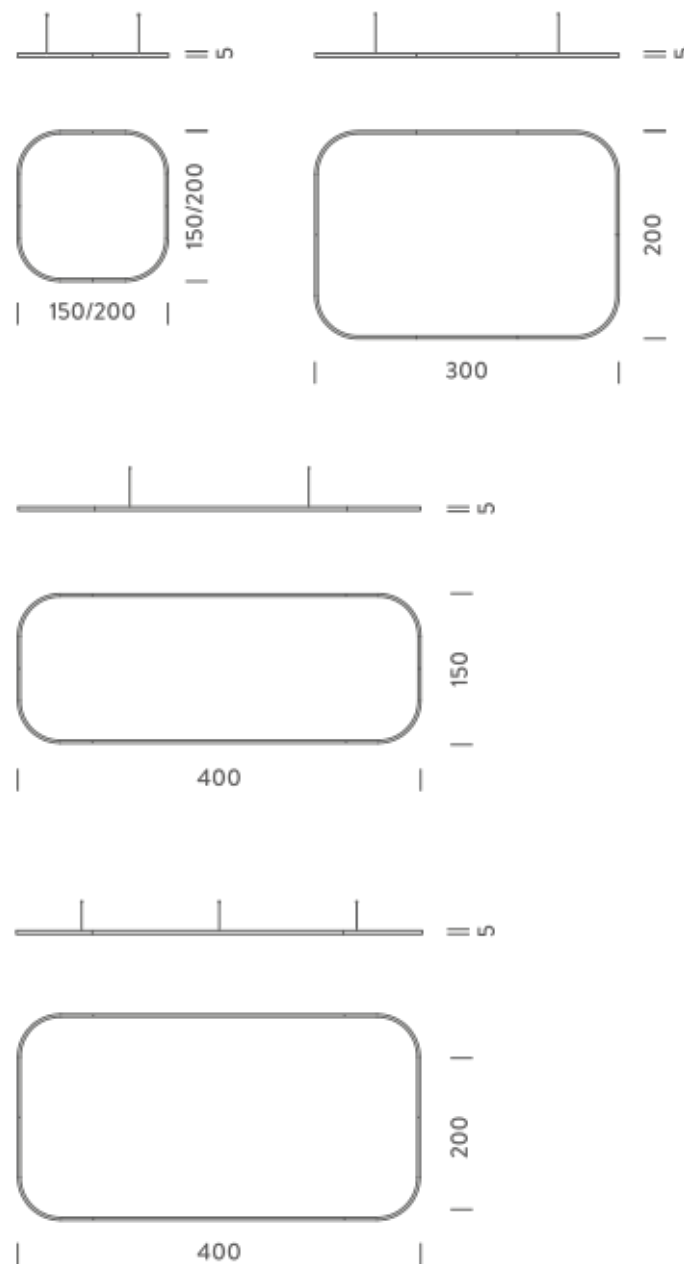

## 4X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	18859lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15DBO

BZRQ1724G15DNE

BZRQ1724G15DOR

### PACKAGE

Package 01

### Structure

white

black


gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

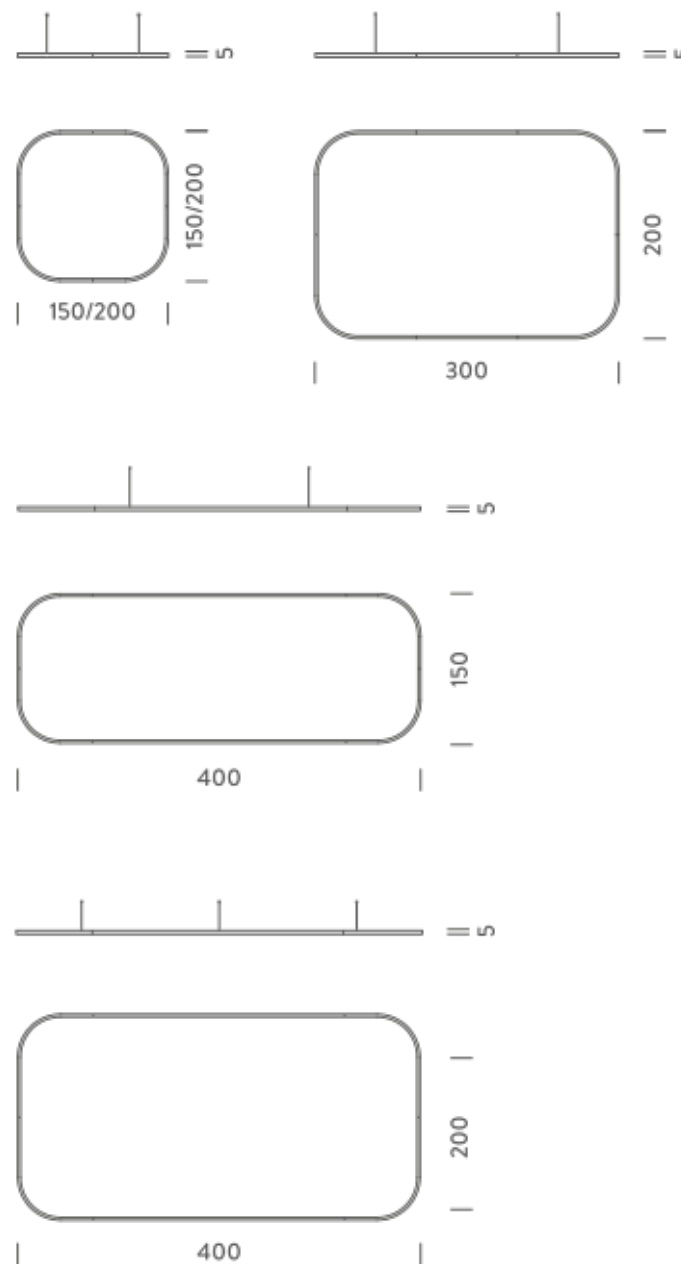

## 4X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9984lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

### Codes

BZRQ1612G15WBO  
BZRQ1612G15WNE  
BZRQ1612G15WOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

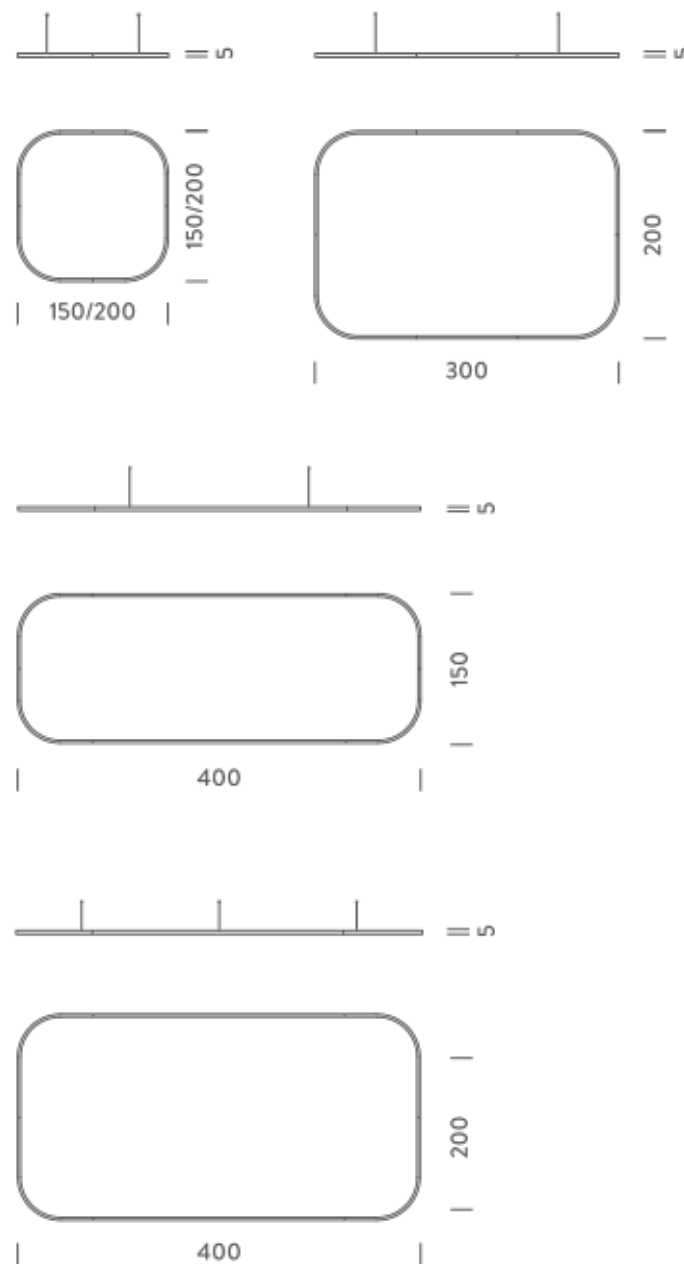

## 4X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	19968lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15WBO  
BZRQ1724G15WNE  
BZRQ1724G15WOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Certificazioni

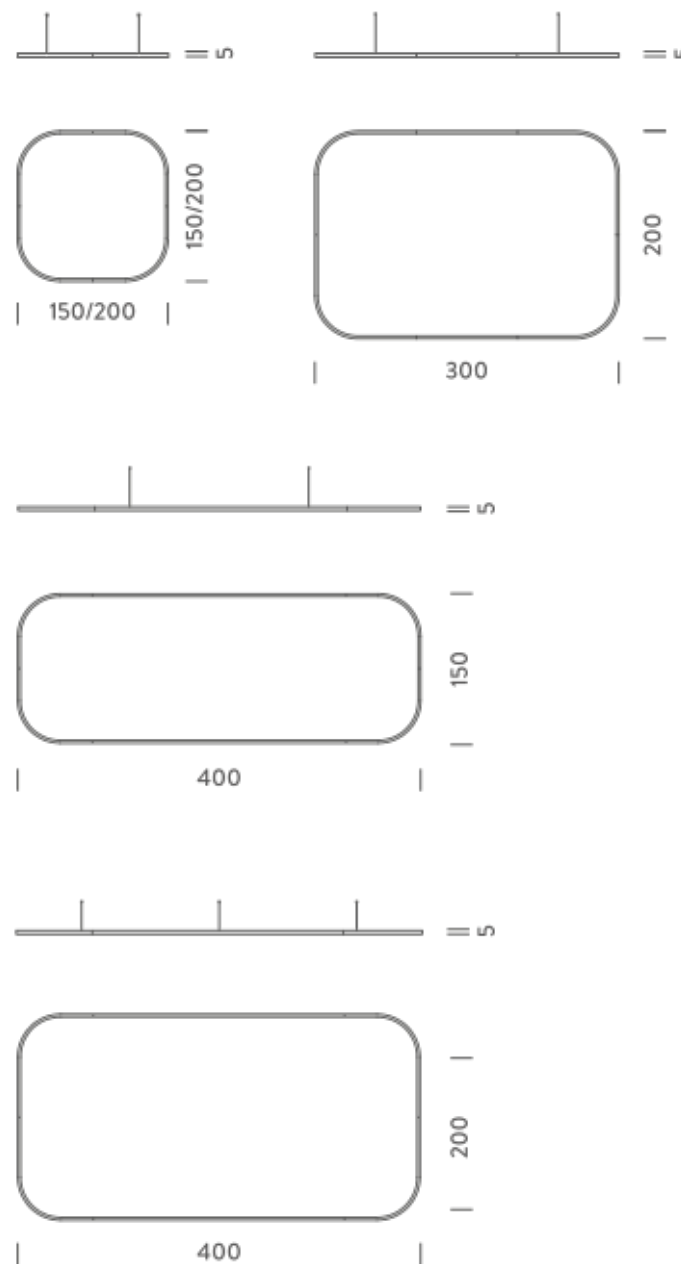

## 4X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	11094lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°

Notes  
included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

Customization options

Shapes, sizes

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

### Codes

BZRQ1612G15NBO  
BZRQ1612G15NNE  
BZRQ1612G15NOR

### Structure


white  
black  
gold

### PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

### Certificazioni

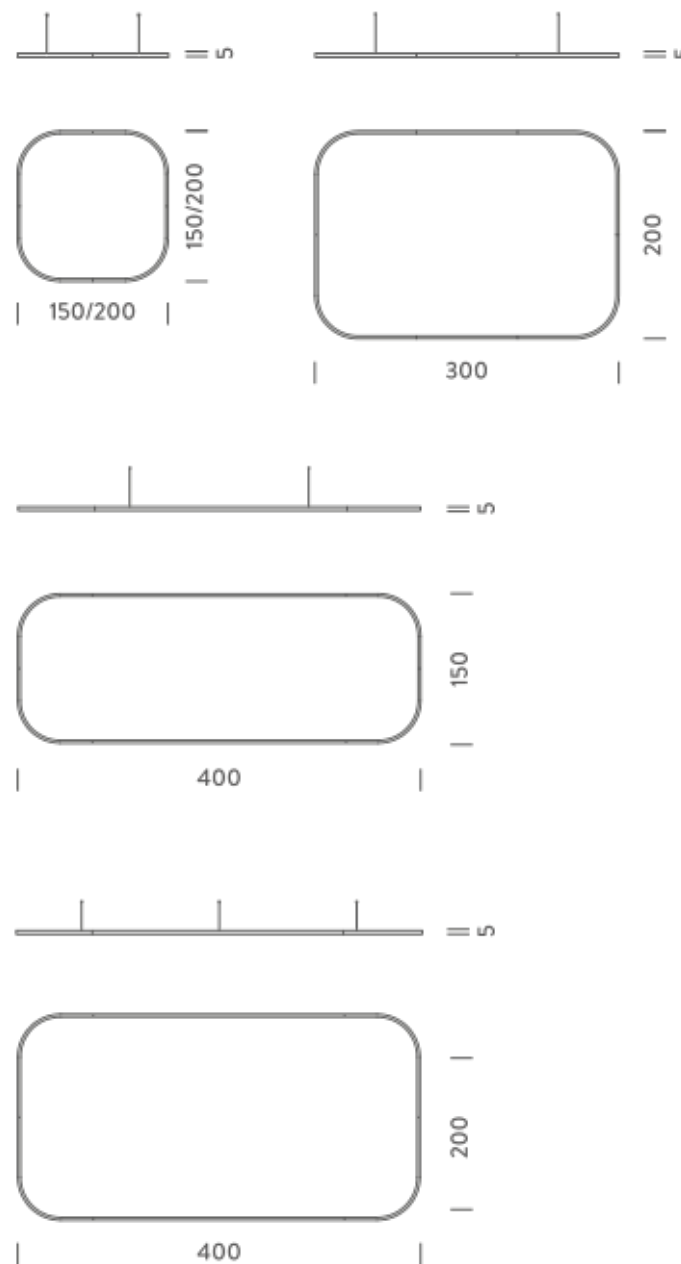

## 4X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	22187lm
Initial luminaire efficacy	35lm/W
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15NBO

BZRQ1724G15NNE

BZRQ1724G15NOR

### PACKAGE

Package 01


Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Structure

white

black

gold

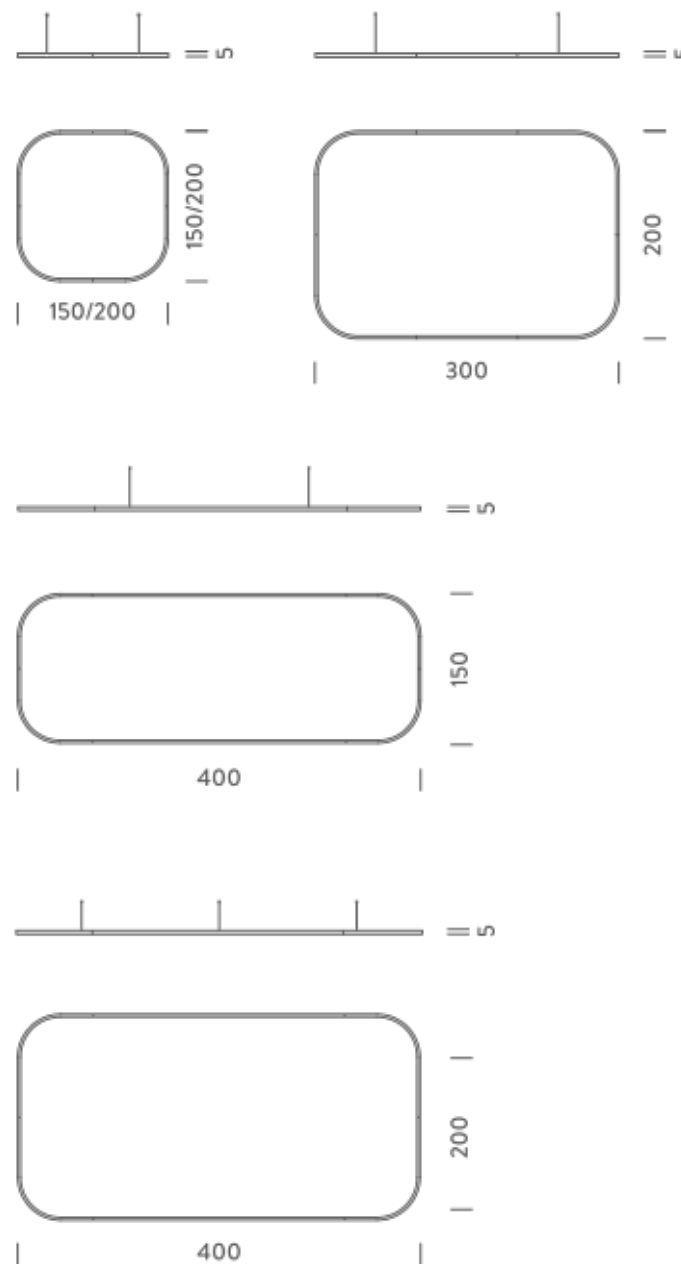

### Certificazioni

