

# KIOPS

Downlight a LED a plafone per esterni. Proiettore in alluminio anodizzato equipaggiato con 1 LED ad alta resa. Kirops surface è proposto con differenti potenze, temperature colore e fasci ottici. Alimentatore integrato (ON-OFF). UGR<19



3000K - 14W | 21°

## LAMPING

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Source                          | LED spot                            |
| Total power                     | 14W                                 |
| Emission                        | Direct 21°                          |
| Switching                       | ON/OFF                              |
| Tension                         | 220/240V                            |
| Color temperature               | 3000K                               |
| Luminous flux                   | 1500lm                              |
| Initial luminaire efficacy      | 107lm/W                             |
| Initial chromaticity            | SDCM < 3                            |
| Typ CRI                         | 80                                  |
| Energy class                    | A+                                  |
| IP class                        | 65                                  |
| Dimensions                      | ø14x22m                             |
| Materials                       | Aluminum                            |
| Ambient temperature range       | - 20°C / 35°                        |
| Performance ambient temperature | 25°                                 |
| Notes                           | driver included, UGR<19             |
| Customization options           | LED colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                             |

## Codes

MKIR0901502WGP

## Structure

grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni



3000K - 14W | 44°

## LAMPING

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Source                          | LED spot                            |
| Total power                     | 14W                                 |
| Emission                        | Direct 44°                          |
| Switching                       | ON/OFF                              |
| Tension                         | 220/240V                            |
| Color temperature               | 3000K                               |
| Luminous flux                   | 1500lm                              |
| Initial luminaire efficacy      | 107lm/W                             |
| Initial chromaticity            | SDCM < 3                            |
| Typ CRI                         | 80                                  |
| Energy class                    | A+                                  |
| IP class                        | 65                                  |
| Dimensions                      | ø14x22cm                            |
| Materials                       | Aluminum                            |
| Ambient temperature range       | - 20°C / 35°                        |
| Performance ambient temperature | 25°                                 |
| Notes                           | driver included                     |
| Customization options           | LED colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                             |

## Codes

MKIR0901802WGP

## Structure


grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni

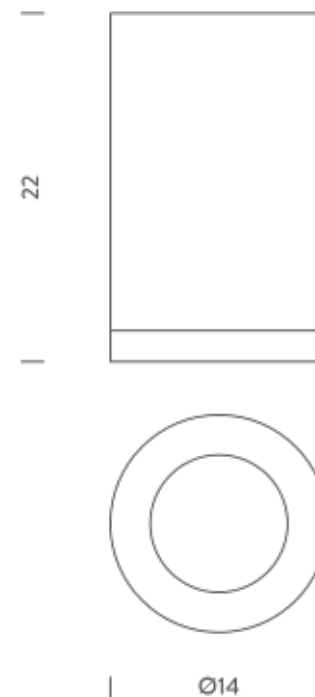

3000K - 19W | 21°

## LAMPING

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Source                          | LED spot                            |
| Total power                     | 19W                                 |
| Emission                        | Direct 21°                          |
| Switching                       | ON/OFF                              |
| Tension                         | 220/240V                            |
| Color temperature               | 3000K                               |
| Luminous flux                   | 2000lm                              |
| Initial luminaire efficacy      | 105lm/W                             |
| Initial chromaticity            | SDCM < 3                            |
| Typ CRI                         | 80                                  |
| Energy class                    | A+                                  |
| IP class                        | 65                                  |
| Dimensions                      | ø14x22cm                            |
| Materials                       | Aluminum                            |
| Ambient temperature range       | - 20°C / 35°                        |
| Performance ambient temperature | 25°                                 |
| Notes                           | driver included                     |
| Customization options           | LED colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                             |

## Codes

MKIR0902502WGP

## Structure


grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni

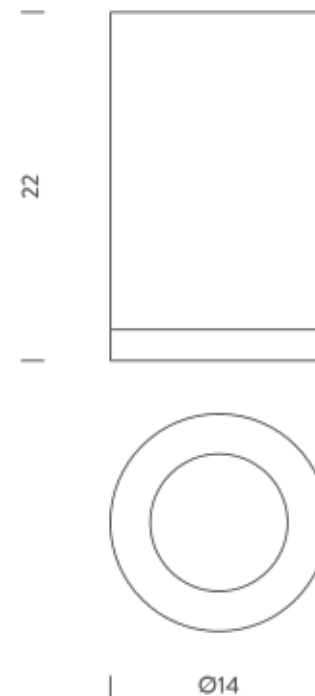

3000K - 19W | 44°

LAMPING


|                                 |                                     |
|---------------------------------|-------------------------------------|
| Source                          | LED spot                            |
| Total power                     | 19W                                 |
| Emission                        | Direct 44°                          |
| Switching                       | ON/OFF                              |
| Tension                         | 220/240V                            |
| Color temperature               | 3000K                               |
| Luminous flux                   | 2000lm                              |
| Initial luminaire efficacy      | 105lm/W                             |
| Initial chromaticity            | SDCM < 3                            |
| Typ CRI                         | 80                                  |
| Energy class                    | A+                                  |
| IP class                        | 65                                  |
| Dimensions                      | ø14x22cm                            |
| Materials                       | Aluminum                            |
| Ambient temperature range       | - 20°C / 35°                        |
| Performance ambient temperature | 25°                                 |
| Notes                           | driver included                     |
| Customization options           | LED colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                             |

Codes  
MKIR0902802WGP

PACKAGE

Package 01                      Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

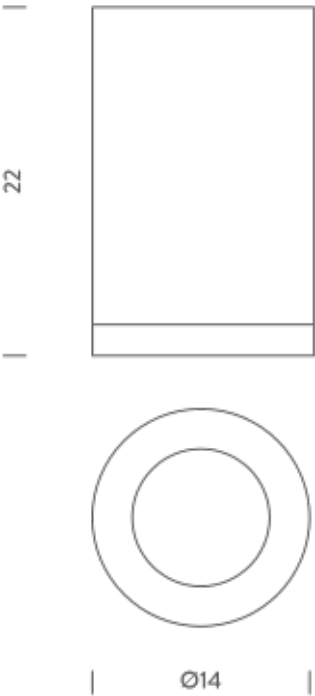

4000K - 14W | 21°

## LAMPING

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Source                          | LED spot                            |
| Total power                     | 14W                                 |
| Emission                        | Direct 21°                          |
| Switching                       | ON/OFF                              |
| Tension                         | 220/240V                            |
| Color temperature               | 4000K                               |
| Luminous flux                   | 1500lm                              |
| Initial luminaire efficacy      | 107lm/W                             |
| Initial chromaticity            | SDCM < 3                            |
| Typ CRI                         | 80                                  |
| Energy class                    | A+                                  |
| IP class                        | 65                                  |
| Dimensions                      | ø14x22cm                            |
| Materials                       | Aluminum                            |
| Ambient temperature range       | - 20°C / 35°                        |
| Performance ambient temperature | 25°                                 |
| Notes                           | driver included                     |
| Customization options           | LED colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                             |

## Codes

MKIR0901502NGP

## Structure


grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni

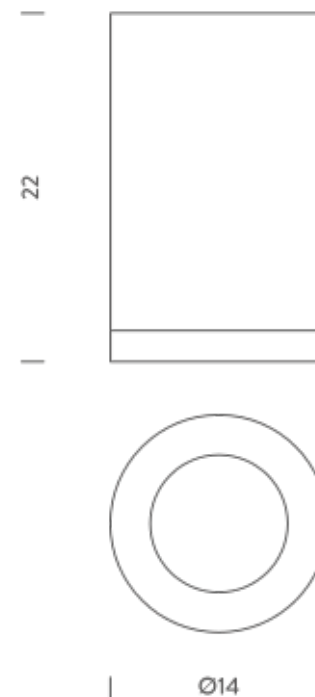

4000K - 14W | 44°

## LAMPING

|                                 |                                 |
|---------------------------------|---------------------------------|
| Source                          | LED spot                        |
| Total power                     | 14W                             |
| Emission                        | Direct 44°                      |
| Switching                       | ON/OFF                          |
| Tension                         | 220/240V                        |
| Color temperature               | 4000K                           |
| Luminous flux                   | 1500lm                          |
| Initial luminaire efficacy      | 107lm/W                         |
| Initial chromaticity            | SDCM < 3                        |
| Typ CRI                         | 80                              |
| Energy class                    | A+                              |
| IP class                        | 65                              |
| Dimensions                      | ø14x22cm                        |
| Materials                       | Aluminum                        |
| Ambient temperature range       | - 20°C / 35°                    |
| Performance ambient temperature | 25°                             |
| Notes                           | driver included                 |
| Customization options           | Colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                         |

## Codes

MKIR0901802NGP

## Structure


grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni

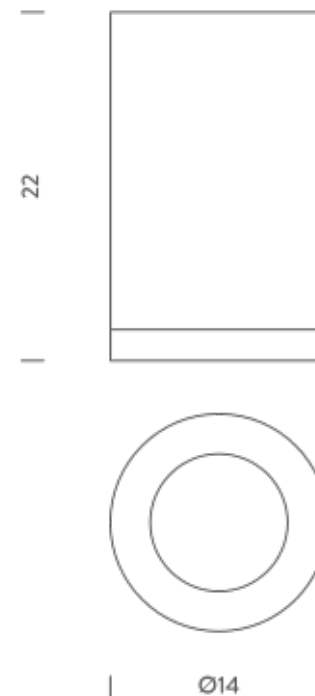

4000K - 19W | 21°

## LAMPING

|                                 |                                |
|---------------------------------|--------------------------------|
| Source                          | LED spot                       |
| Total power                     | 19W                            |
| Emission                        | Direct 21°                     |
| Switching                       | ON/OFF                         |
| Tension                         | 220/240V                       |
| Color temperature               | 4000K                          |
| Luminous flux                   | 2000lm                         |
| Initial luminaire efficacy      | 105lm/W                        |
| Initial chromaticity            | SDCM < 3                       |
| Typ CRI                         | 80                             |
| Energy class                    | A+                             |
| IP class                        | 65                             |
| Dimensions                      | ø14x22cm                       |
| Materials                       | Aluminum                       |
| Ambient temperature range       | - 20°C / 35°                   |
| Performance ambient temperature | 25°                            |
| Notes                           | driver included                |
| Customization options           | Color temperatures, finishings |
| Net lamp weight                 | 2,25 kg                        |

## Codes

MKIR0902502NGP

## Structure


grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni

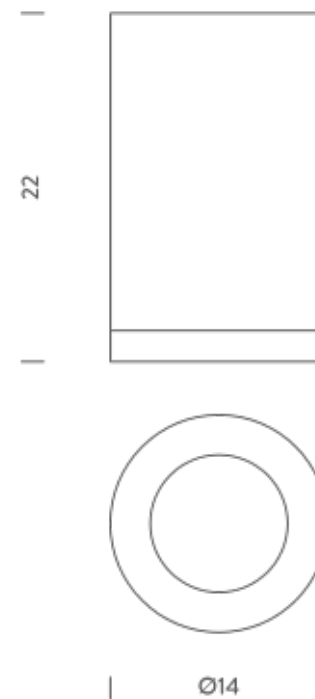

4000K - 19W | 44°

## LAMPING

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Source                          | LED spot                            |
| Total power                     | 19W                                 |
| Emission                        | Direct 44°                          |
| Switching                       | ON/OFF                              |
| Tension                         | 220/240V                            |
| Color temperature               | 4000K                               |
| Luminous flux                   | 2000lm                              |
| Initial luminaire efficacy      | 105lm/W                             |
| Initial chromaticity            | SDCM < 3                            |
| Typ CRI                         | 80                                  |
| Energy class                    | A+                                  |
| IP class                        | 65                                  |
| Dimensions                      | ø14x22cm                            |
| Materials                       | Aluminum                            |
| Ambient temperature range       | - 20°C / 35°                        |
| Performance ambient temperature | 25°                                 |
| Notes                           | driver included                     |
| Customization options           | LED colour temperatures, finishings |
| Net lamp weight                 | 2,25 kg                             |

## Codes

MKIR0902802NGP

## Structure

grey

## PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni

