

# LUX INDOOR

Micro faretto LED da incasso per interni dedicato ad un'illuminazione decorativa. Corpo in alluminio anodizzato. Fascio ottico 100° o opal. Può essere fissato tramite dado su superfici ispezionabili, con due O-ring in gomma o con molla di fissaggio.



3000K | 100°

## LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 100°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	53lm
Initial luminaire efficacy	44lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,25m; driver not included
Customization options	DALI, DMX, Casambi
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

## Codes

BLUX0101717WAA


## Structure

grey

## PACKAGE

Package 01 Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

## Certificazioni

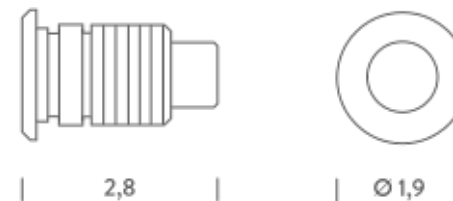

## 3000K | OPAL

### LAMPING

Source	LED spot
Total power	1,2W
Emission	Diffused
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	53lm
Initial luminaire efficacy	44lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,25m; driver not included
Customization options	DALI, DMX, Casambi
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

### Codes

BLUX0101G17WAA


### Structure

grey

### PACKAGE

Package 01 Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

### Certificazioni

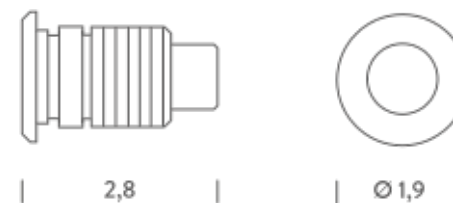

4000K | 100°

## LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 100°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	84lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,25m; driver not included
Customization options	DALI, DMX, Casambi
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

## Codes

BLUX0101717NAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

## Certificazioni

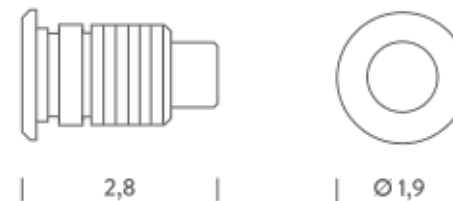

## 4000K | OPAL

---

### LAMPING

Source	LED spot
Total power	1,2W
Emission	Diffused
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	84lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,25m; driver not included
Customization options	DALI, DMX, Casambi
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

### Codes

BLUX0101G17NAA

### Structure

grey

### PACKAGE

Package 01 Dimension: 15x2,5x11 cm / Gross weight: 0,25 kg

### Certificazioni

