

# SLACKLINE TRIM

La famiglia SLACKLINE è composta da un'ampia selezione di profili in alluminio con differenti tipologie di fissaggio, dotati della stessa sorgente LED: Slackline Trim, Slackline Regular e Slackline Micro. Queste caratteristiche rendono l'impiego di Slackline molto flessibile in ogni ambiente. Design minimal ed elevata qualità della luce. Slackline rappresenta la soluzione ideale per realizzare soluzioni in linea continua (su richiesta). A seconda del tipo di fissaggio, è proposto in differenti lunghezze standard e con CRI>94.



1M | 3000K

## LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	560lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	A+
IP class	40
Dimensions	3,25x2x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,   Recessed fix kit for plasterboard,
Net lamp weight	0,45 kg

## Codes

BSLA0110G26WAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni

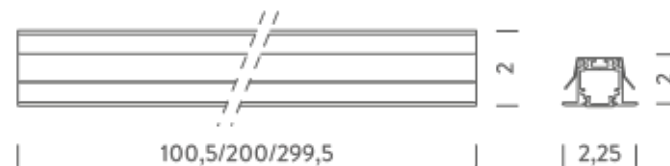

1M | 4000K

## LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	660lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	A+
IP class	40
Dimensions	3,25x2x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,   Recessed fix kit for plasterboard,
Net lamp weight	0,45 kg

## Codes

BSLA0110G26NAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

## Certificazioni

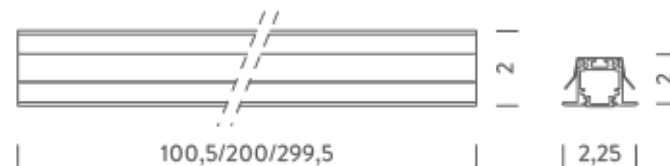

2M | 3000K

## LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1120lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	A+
IP class	40
Dimensions	3,25x2x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,   Recessed fix kit for plasterboard,
Net lamp weight	0,87 kg

## Codes

BSLA0120G26WAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

## Certificazioni

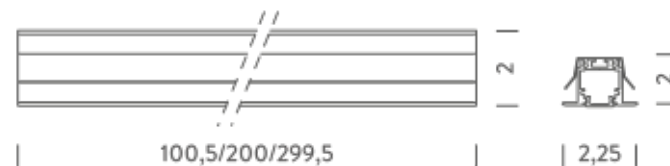

2M | 4000K

## LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1320lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	A+
IP class	40
Dimensions	3,25x2x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,   Recessed fix kit for plasterboard,
Net lamp weight	0,87 kg

## Codes

BSLA0120G26NAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 305x11x2,5 cm / Gross weight: 1,32 kg

## Certificazioni

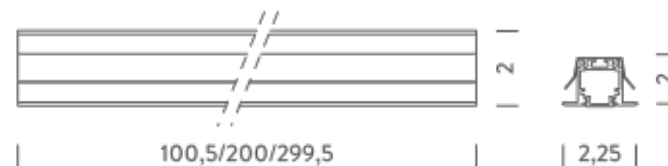

## 3M | 3000K

### LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1980lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	A+
IP class	40
Dimensions	3,25x2x299,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,   Recessed fix kit for plasterboard,
Net lamp weight	1,32 kg

### Codes

BSLA0130G26WAA

### Structure


grey

### PACKAGE

Package 01

Dimension: 305x11x2,5 cm / Gross weight: 1,32 kg

### Certificazioni

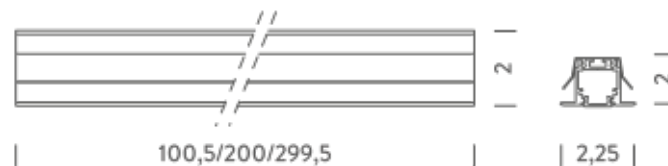

3M | 4000K

## LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1680lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	A+
IP class	40
Dimensions	3,25x2x299,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,   Recessed fix kit for plasterboard,
Net lamp weight	1,32 kg

## Codes

BSLA0130G26NAA

## Structure

grey

## PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni

