

# SLACKLINE REGULAR

La famiglia SLACKLINE è composta da un'ampia selezione di profili in alluminio con differenti tipologie di fissaggio, dotati della stessa sorgente LED: Slackline Trim, Slackline Regular e Slackline Micro.

Queste caratteristiche rendono l'impiego di Slackline molto flessibile in ogni ambiente. Design minimal ed elevata qualità della luce.

Slackline rappresenta la soluzione ideale per realizzare soluzioni in linea continua (su richiesta).

A seconda del tipo di fissaggio, è proposto in differenti lunghezze standard e con CRI>94.



## RECESSED | 1M - 3000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 860lm                                                           |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 5,14x1,35x100,5cm                                               |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

### Codes

BSLA2110G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




### SUSPENDED

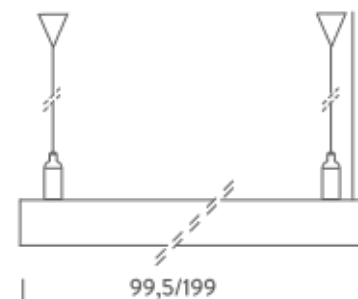





### CEILING



### RECESSED

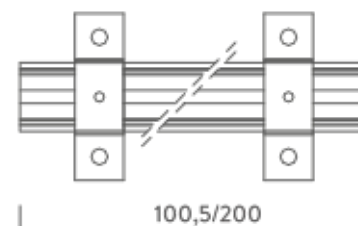

### WALL MOUNTED

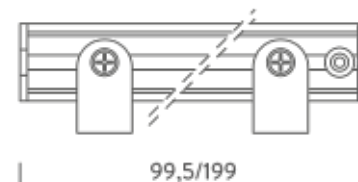

## RECESSED | 1M - 4000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 4000K                                                           |
| Luminous flux                   | 890lm                                                           |
| Initial luminaire efficacy      | 59lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 94                                                              |
| Energy class                    | E                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 5,14x1,35x100,5cm                                               |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

### Codes

BSLA2110G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




### SUSPENDED

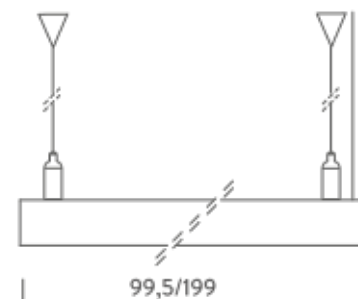





### CEILING



### RECESSED

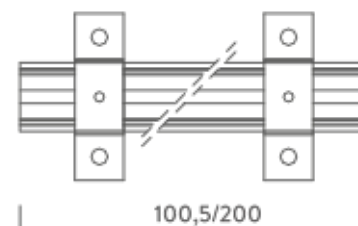

### WALL MOUNTED

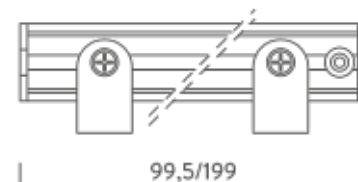

## RECESSED | 2M - 3000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 30W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 1720lm                                                          |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 5,14x1,35x200cm                                                 |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,90 kg                                                         |

### Codes

BSLA2120G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni




### SUSPENDED

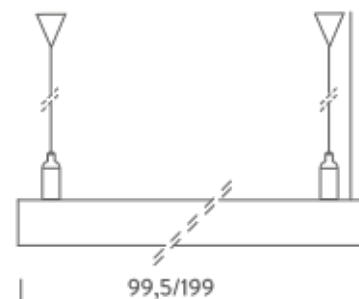





### CEILING



### RECESSED

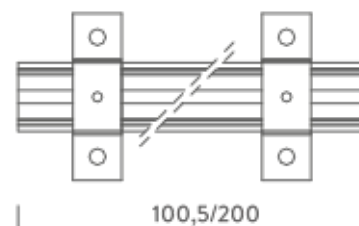

### WALL MOUNTED

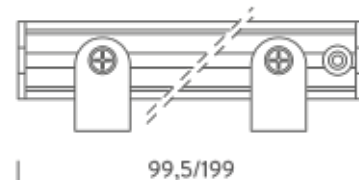

## RECESSED | 2M - 4000K

### LAMPING

|                                 |                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------|
| Source                          | Linear LED                                                                      |
| Total power                     | 30W                                                                             |
| Emission                        | Diffused                                                                        |
| Switching                       | according driver                                                                |
| Tension                         | 24VDC                                                                           |
| Color temperature               | 4000K                                                                           |
| Luminous flux                   | 1780lm                                                                          |
| Initial luminaire efficacy      | 59lm/W                                                                          |
| Initial chromaticity            | SDCM < 3                                                                        |
| Typ CRI                         | 94                                                                              |
| Energy class                    | E                                                                               |
| IP class                        | 40                                                                              |
| Dimensions                      | 5,14x1,35x200cm                                                                 |
| Materials                       | Anodized aluminum                                                               |
| Ambient temperature range       | - 20°C / 35°                                                                    |
| Performance ambient temperature | 25°                                                                             |
| Notes                           | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |

### Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

### Accessories

Drivers 24VDC + DALI interface,

### Net lamp weight

0,90 kg

### Codes

BSLA2120G26NAA

### Structure

grey

### PACKAGE

Package 01


Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni



NEMO


### SUSPENDED

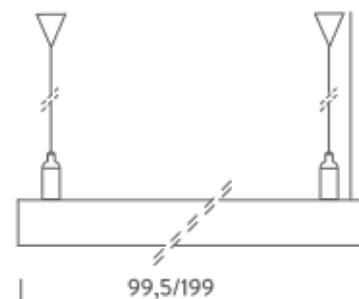





### CEILING



### RECESSED

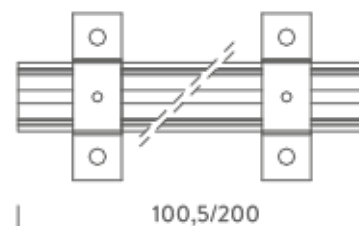

### WALL MOUNTED

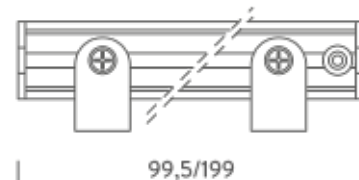

# PENDANT | 1M - 3000K

## LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 860lm                                                           |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x1,35x99,5cm                                                |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 2m; driver not included                                   |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

## Codes

BSLA0310G26WAA

## Structure

grey

## PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni




## SUSPENDED

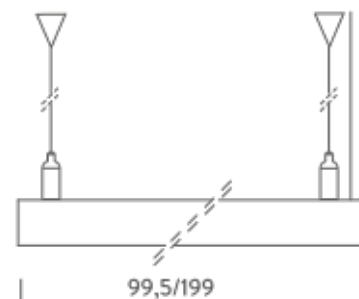



## CEILING



## RECESSED

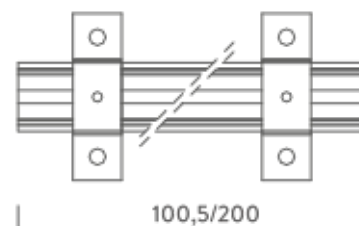

## WALL MOUNTED

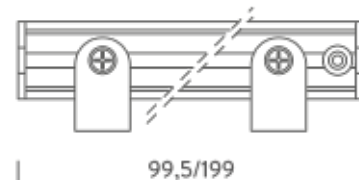

# PENDANT | 1M - 4000K

## LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 4000K                                                           |
| Luminous flux                   | 890lm                                                           |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 94                                                              |
| Energy class                    | E                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x1,35x99,5cm                                                |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 2m; driver not included                                   |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

## Codes

BSLA0310G26NAA

## Structure

grey

## PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni





## SUSPENDED

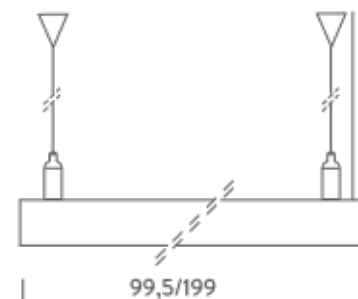



## CEILING



## RECESSED

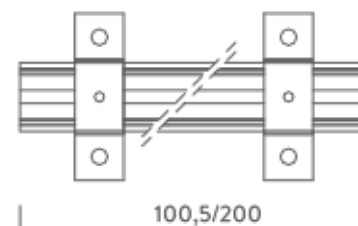

## WALL MOUNTED

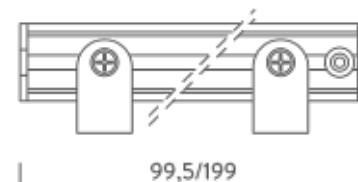

## PENDANT | 2M - 3000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 30W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 1720lm                                                          |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x1,35x199,5cm                                               |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 2m; driver not included                                   |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,90 kg                                                         |

### Codes

BSLA0320G26WAA

### Structure

grey

### PACKAGE



Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni




### SUSPENDED

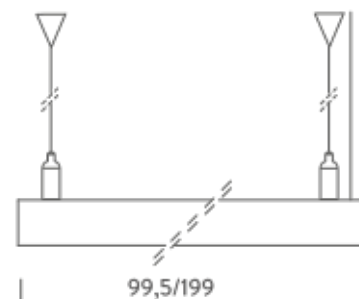



### CEILING



### RECESSED

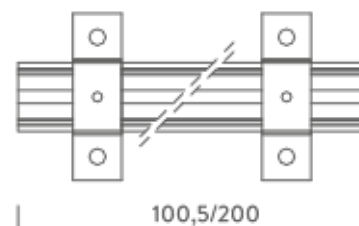

### WALL MOUNTED

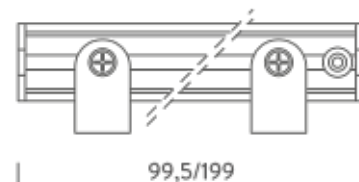



## PENDANT | 2M - 4000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 30W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according do driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 4000K                                                           |
| Luminous flux                   | 1780lm                                                          |
| Initial luminaire efficacy      | 59lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 94                                                              |
| Energy class                    | E                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x1,35x199,5cm                                               |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 2m; driver not included                                   |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,90 kg                                                         |

### Codes

BSLA0320G26NAA

### Structure

grey

### PACKAGE



Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni




### SUSPENDED

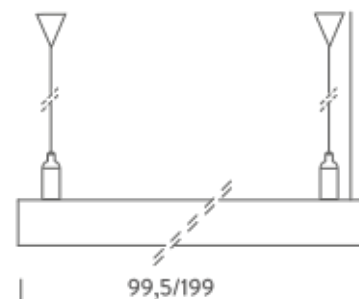



### CEILING



### RECESSED

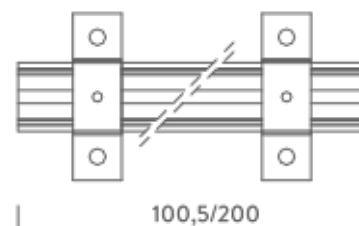

### WALL MOUNTED

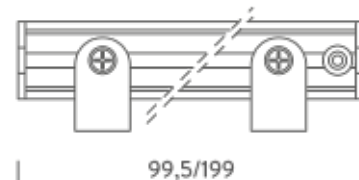

## CEILING | 1M - 3000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 860lm                                                           |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x1,35x101cm                                                 |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

### Codes

BSLA0410G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




### SUSPENDED

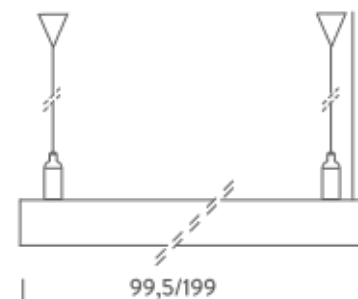





### CEILING



### RECESSED

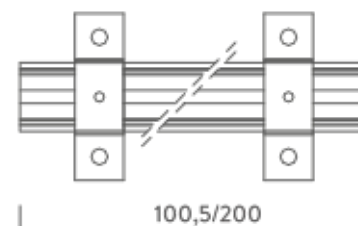

### WALL MOUNTED

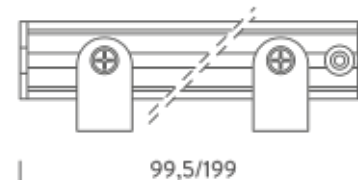

## CEILING | 1M - 4000K

### LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 4000K                                                           |
| Luminous flux                   | 890lm                                                           |
| Initial luminaire efficacy      | > 59lm/W                                                        |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 94                                                              |
| Energy class                    | E                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x1,35x101cm                                                 |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

### Codes

BSLA0410G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




### SUSPENDED

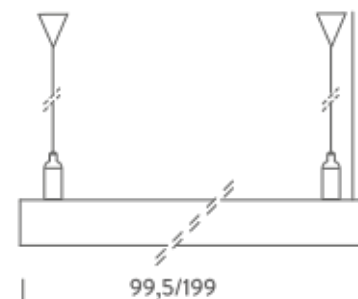





### CEILING



### RECESSED

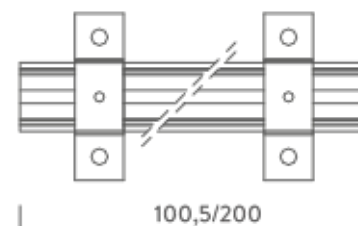

### WALL MOUNTED

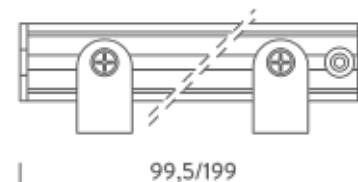

## CEILING | 2M - 3000K

### LAMPING

|                                 |                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------|
| Source                          | Linear LED                                                                      |
| Total power                     | 30W                                                                             |
| Emission                        | Diffused                                                                        |
| Switching                       | according to driver                                                             |
| Tension                         | 24VDC                                                                           |
| Color temperature               | 3000K                                                                           |
| Luminous flux                   | 1720lm                                                                          |
| Initial luminaire efficacy      | 57lm/W                                                                          |
| Initial chromaticity            | SDCM < 3                                                                        |
| Typ CRI                         | 97                                                                              |
| Energy class                    | F                                                                               |
| IP class                        | 40                                                                              |
| Dimensions                      | 2,25x1,35x201mm                                                                 |
| Materials                       | Anodized aluminum                                                               |
| Ambient temperature range       | - 20°C / 35°                                                                    |
| Performance ambient temperature | 25°                                                                             |
| Notes                           | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |

### Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

### Accessories

Drivers 24VDC + DALI interface,

### Net lamp weight

0,90 kg

### Codes

BSLA0420G26WAA

### Structure

grey

### PACKAGE

Package 01


Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni



NEMO


### SUSPENDED

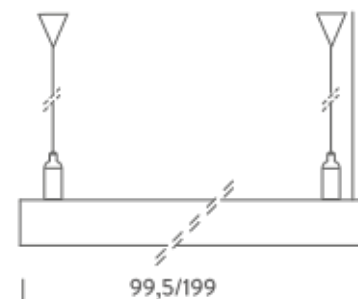





### CEILING



### RECESSED

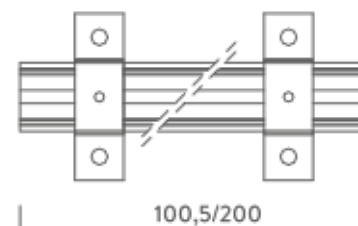

### WALL MOUNTED

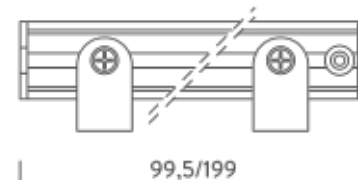

## CEILING | 2M - 4000K

### LAMPING

|                                 |                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------|
| Source                          | Linear LED                                                                      |
| Total power                     | 30W                                                                             |
| Emission                        | Diffused                                                                        |
| Switching                       | according to driver                                                             |
| Tension                         | 24VDC                                                                           |
| Color temperature               | 4000K                                                                           |
| Luminous flux                   | 1780lm                                                                          |
| Initial luminaire efficacy      | 59lm/W                                                                          |
| Initial chromaticity            | SDCM < 3                                                                        |
| Typ CRI                         | 94                                                                              |
| Energy class                    | E                                                                               |
| IP class                        | 40                                                                              |
| Dimensions                      | 2,25x1,35x201mm                                                                 |
| Materials                       | Anodized aluminum                                                               |
| Ambient temperature range       | - 20°C / 35°                                                                    |
| Performance ambient temperature | 25°                                                                             |
| Notes                           | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |

### Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

### Accessories

Drivers 24VDC + DALI interface,

### Net lamp weight

0,90 kg

### Codes

BSLA0420G26NAA

### Structure

grey

### PACKAGE

Package 01


Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni



NEMO


### SUSPENDED

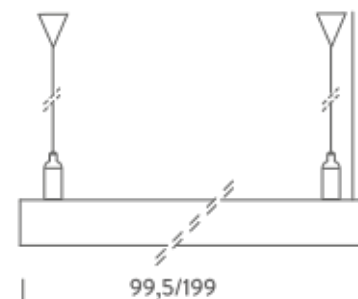





### CEILING



### RECESSED

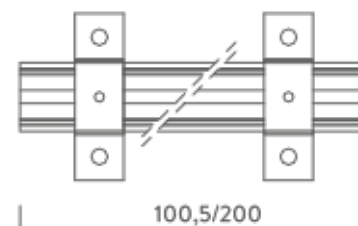

### WALL MOUNTED

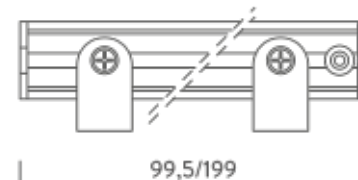

# WALL | 1M - 3000K

## LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 15W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 860lm                                                           |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x2,15x99,5cm                                                |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,45 kg                                                         |

## Codes

BSLA4010G26WAA

## Structure

grey

## PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni




## SUSPENDED

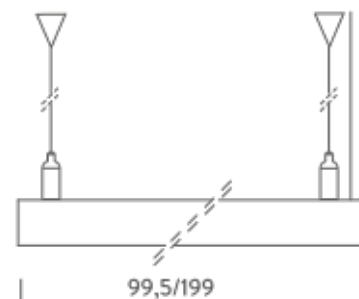



## CEILING



## RECESSED

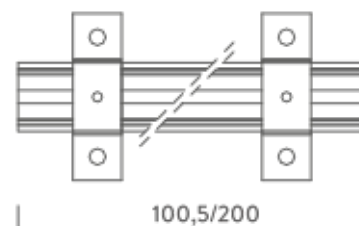

## WALL MOUNTED

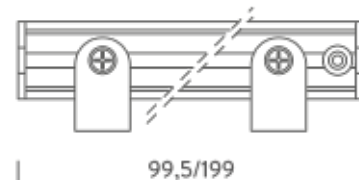

# WALL | 1M - 4000K

## LAMPING

|                                 |                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------|
| Source                          | Linear LED                                                                      |
| Total power                     | 15W                                                                             |
| Emission                        | Diffused                                                                        |
| Switching                       | according to driver                                                             |
| Tension                         | 24VDC                                                                           |
| Color temperature               | 4000K                                                                           |
| Luminous flux                   | 890lm                                                                           |
| Initial luminaire efficacy      | 57lm/W                                                                          |
| Initial chromaticity            | SDCM < 3                                                                        |
| Typ CRI                         | 94                                                                              |
| Energy class                    | E                                                                               |
| IP class                        | 40                                                                              |
| Dimensions                      | 2,25x2,15x99,5cm                                                                |
| Materials                       | Anodized aluminum                                                               |
| Ambient temperature range       | - 20°C / 35°                                                                    |
| Performance ambient temperature | 25°                                                                             |
| Notes                           | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |

## Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

## Accessories

Drivers 24VDC + DALI interface,

## Net lamp weight

0,45 kg

## Codes

BSLA4010G26NAA

## Structure

grey

## PACKAGE

Package 01


Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni



NEMO


## SUSPENDED

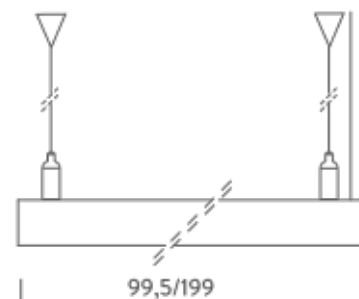





## CEILING



## RECESSED

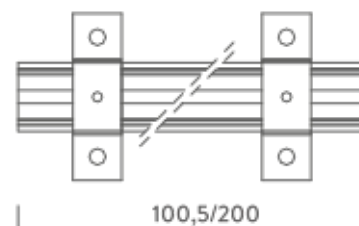

## WALL MOUNTED

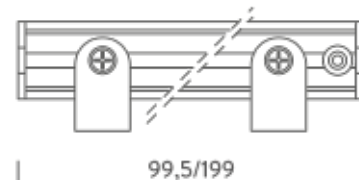

# WALL | 2M - 3000K

## LAMPING

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| Source                          | Linear LED                                                      |
| Total power                     | 30W                                                             |
| Emission                        | Diffused                                                        |
| Switching                       | according to driver                                             |
| Tension                         | 24VDC                                                           |
| Color temperature               | 3000K                                                           |
| Luminous flux                   | 1720lm                                                          |
| Initial luminaire efficacy      | 57lm/W                                                          |
| Initial chromaticity            | SDCM < 3                                                        |
| Typ CRI                         | 97                                                              |
| Energy class                    | F                                                               |
| IP class                        | 40                                                              |
| Dimensions                      | 2,25x2,15x199cm                                                 |
| Materials                       | Anodized aluminum                                               |
| Ambient temperature range       | - 20°C / 35°                                                    |
| Performance ambient temperature | 25°                                                             |
| Notes                           | cable 0,5m; driver not included                                 |
| Customization options           | 1-10V, DALI, DMX, Casambi, LED colour temperatures, body length |
| Accessories                     | Drivers 24VDC + DALI interface,                                 |
| Net lamp weight                 | 0,90 kg                                                         |

## Codes

BSLA4020G26WAA

## Structure

grey

## PACKAGE



Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

## Certificazioni




## SUSPENDED

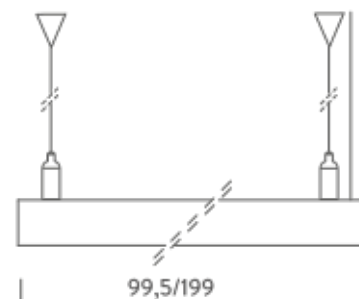



## CEILING



## RECESSED

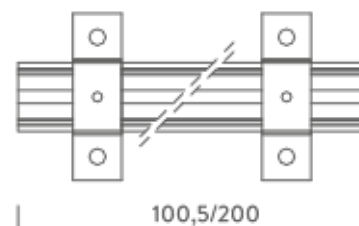

## WALL MOUNTED

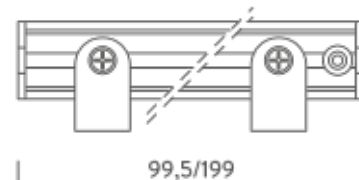



## WALL | 2M - 4000K

### LAMPING

|                                 |                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------|
| Source                          | Linear LED                                                                      |
| Total power                     | 30W                                                                             |
| Emission                        | Diffused                                                                        |
| Switching                       | according to driver                                                             |
| Tension                         | 24VDC                                                                           |
| Color temperature               | 4000K                                                                           |
| Luminous flux                   | 1780lm                                                                          |
| Initial luminaire efficacy      | 59lm/W                                                                          |
| Initial chromaticity            | SDCM < 3                                                                        |
| Typ CRI                         | 94                                                                              |
| Energy class                    | E                                                                               |
| IP class                        | 40                                                                              |
| Dimensions                      | 2,25x2,15x199cm                                                                 |
| Materials                       | Anodized aluminum                                                               |
| Ambient temperature range       | - 20°C / 35°                                                                    |
| Performance ambient temperature | 25°                                                                             |
| Notes                           | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |

### Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

### Accessories

Drivers 24VDC + DALI interface,

### Net lamp weight

0,90 kg

### Codes

BSLA4020G26NAA

### Structure

grey

### PACKAGE

Package 01



Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

### Certificazioni



NEMO



### SUSPENDED

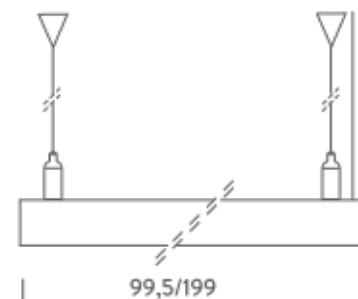

### CEILING



### RECESSED

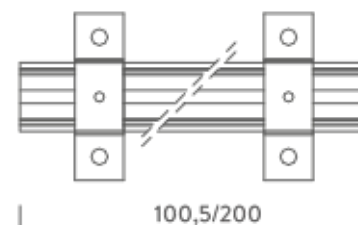

### WALL MOUNTED

