


SLACKLINE MICRO

La famiglia SLACKLINE è composta da un'ampia selezione di profili in alluminio con differenti tipologie di fissaggio, dotati della stessa sorgente LED: Slackline Trim, Slackline Regular e Slackline Micro. Queste caratteristiche rendono l'impiego di Slackline molto flessibile in ogni ambiente. Design minimal ed elevata qualità della luce. Slackline rappresenta la soluzione ideale per realizzare soluzioni in linea continua (su richiesta). A seconda del tipo di fissaggio, è proposto in differenti lunghezze standard e con CRI>94.

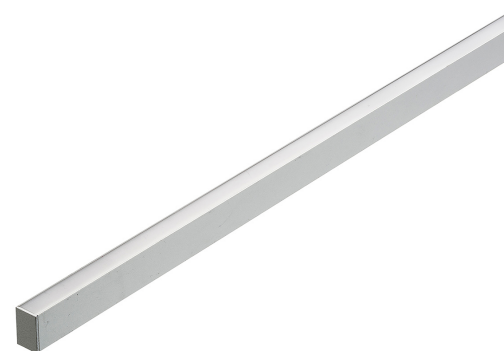

WALL | 1M - 3000K

LAMPING

| | |
|---------------------------------|---|
| Source | Linear LED |
| Total power | 15W |
| Emission | Diffused |
| Tension | 24VDC |
| Color temperature | 3000K |
| Luminous flux | 457lm |
| Initial luminaire efficacy | > 36lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 90 |
| IP class | 40 |
| Dimensions | 1,5x1x100cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 35° |
| Performance ambient temperature | 25° |
| Notes | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |
| Customization options | Lengths |
| Accessories | Drivers 24VDC + DALI interface, |
| Net lamp weight | 0,2 kg |

Codes

BSLM0410G65WAA

Structure

grey

PACKAGE

Package 01 Dimension: 100x5x5 cm / Gross weight: 0,2 kg

Certificazioni



WALL | 1M - 4000K

LAMPING

| | |
|---------------------------------|---|
| Source | Linear LED |
| Total power | 15W |
| Emission | Diffused |
| Tension | 24VDC |
| Color temperature | 4000K |
| Luminous flux | 540lm |
| Initial luminaire efficacy | > 36lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 90 |
| IP class | 40 |
| Dimensions | 1,5x1x100cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 35° |
| Performance ambient temperature | 25° |
| Notes | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |
| Customization options | Lengths |
| Accessories | Drivers 24VDC + DALI interface, |
| Net lamp weight | 0,2 kg |

Codes

BSLM0410G65NAA


Structure

grey

PACKAGE

Package 01 Dimension: 100x5x5 cm / Gross weight: 0,4 kg

Certificazioni

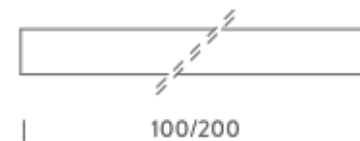

WALL | 2M - 3000K

LAMPING

| | |
|-----------------------------------|---|
| Source | Linear LED |
| Total power | 30W |
| Emission | Diffused |
| Tension | 24VDC |
| Color temperature | 3000K |
| Luminous flux | 914lm |
| Initial luminaire efficacy | > 36lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 90 |
| IP class | 40 |
| Dimensions | 1,5x1x200cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 50° |
| Performance ambient temperature | 25° |
| Mechanical impact protection code | IK08 |
| Notes | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |
| Customization options | Lengths |
| Accessories | Drivers 24VDC + DALI interface, |
| Net lamp weight | 0,4 kg |

Codes

BSLM0420G65WAA


Structure

grey

PACKAGE

Package 01 Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni

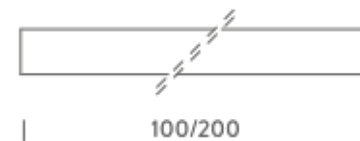

WALL | 2M - 4000K

LAMPING

| | |
|-----------------------------------|---|
| Source | Linear LED |
| Total power | 30W |
| Emission | Diffused |
| Tension | 24VDC |
| Color temperature | 4000K |
| Luminous flux | 1080lm |
| Initial luminaire efficacy | >36lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 90 |
| IP class | 40 |
| Dimensions | 1,5x1x200cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 50° |
| Performance ambient temperature | 25° |
| Mechanical impact protection code | IK08 |
| Notes | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included |
| Customization options | Lengths |
| Accessories | Drivers 24VDC + DALI interface, |
| Net lamp weight | 0,4 kg |

Codes

BSLM0420G65NAA

Structure

grey

PACKAGE

Package 01 Dimension: 200x5x5 cm / Gross weight: 0,31 kg

Certificazioni

