

# MINIFLUX TRANSPARENT

MINIFLUX è un sistema a LED modulare per interni/esterni adatto all'illuminazione in velette, decorativa e d'accento. Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC ad alta emissione. Diffusore in policarbonato trasparente. Il fissaggio avviene tramite staffe in policarbonato trasparente che permettono l'orientabilità del prodotto.

Miniflux è proposto in diverse lunghezze e temperature colore.

Il diametro del tubo in policarbonato varia a seconda del flusso luminoso della lampada.

Alimentatore escluso.



# 1M | 2700K HP

## LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1500lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

## Codes

BBOK0910041DPC

## Structure

transparent

## PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

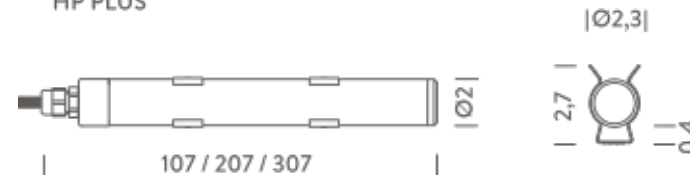

# 1M | 3000K HP

## LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1600lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

## Codes

BBOK0910041WPC

## Structure

transparent

## PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

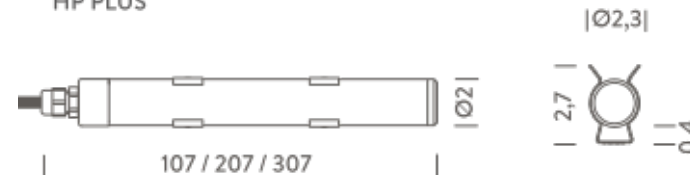

# 1M | 4000K HP

## LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1880lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

## Codes

BBOK0910041NPC

## Structure

transparent

## PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

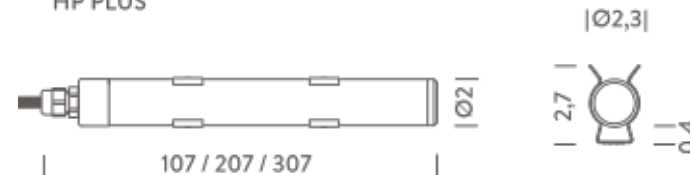

# 1M | 2700K HP - ASYMMETRIC

## LAMPING

Source	LED linear
Total power	14,5W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1360lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

## Codes

BBOK0910241DPC

## Structure

transparent

## PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

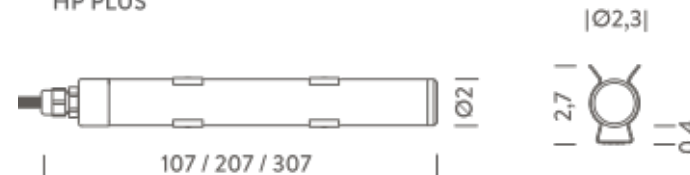

# 1M | 3000K HP - ASYMMETRIC

## LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1430lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

## Codes

BBOK0910241WPC

## Structure

transparent

## PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

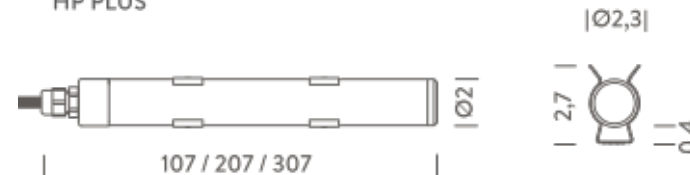

# 1M | 4000K HP - ASYMMETRIC

## LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1660lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

## Codes

BBOK0910241NPC

## Structure

transparent

## PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

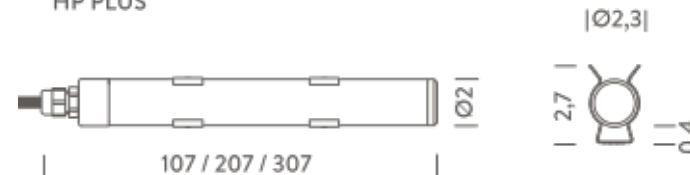

## 2M | 2700K HP

### LAMPING

Source	Linear LED
Total power	29W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3000lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

### Codes

BBOK0920041DPC

### Structure

transparent

### PACKAGE


Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg


### Certificazioni



HP - 120°/ASYMMETRIC

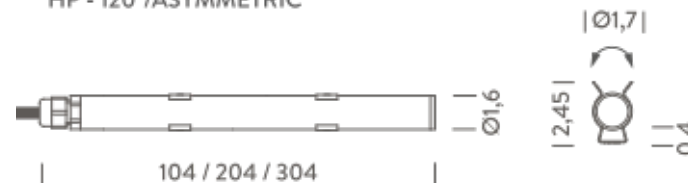

HP PLUS

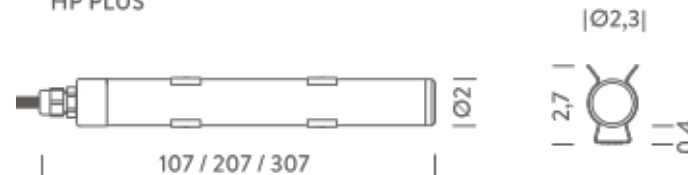



## 2M | 3000K HP

### LAMPING

Source	Linear LED
Total power	29W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3200lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

### Codes

BBOK0920041WPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

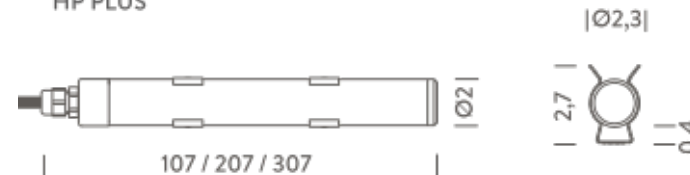

## 2M | 4000K HP

### LAMPING

Source	Linear LED
Total power	29W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3760lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

### Codes

BBOK0920041NPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

### Certificazioni

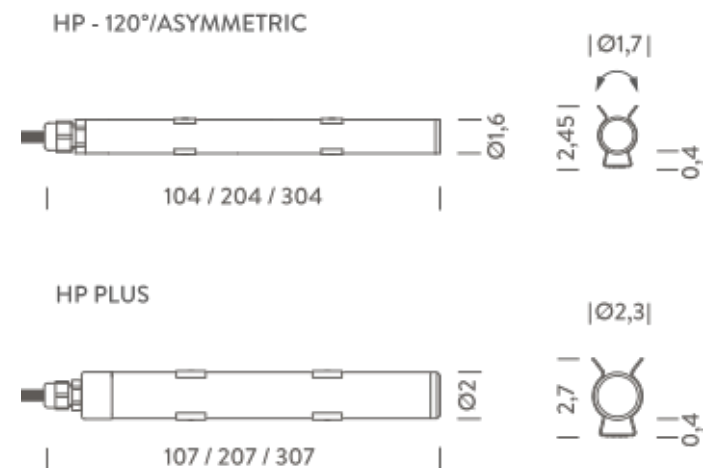

## 2M | 2700K HP - ASYMMETRIC

### LAMPING

Source	LED linear
Total power	29W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	2720lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25° C
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Net lamp weight	0,50 kg

### Codes

BBOK0920241DPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

### Certificazioni

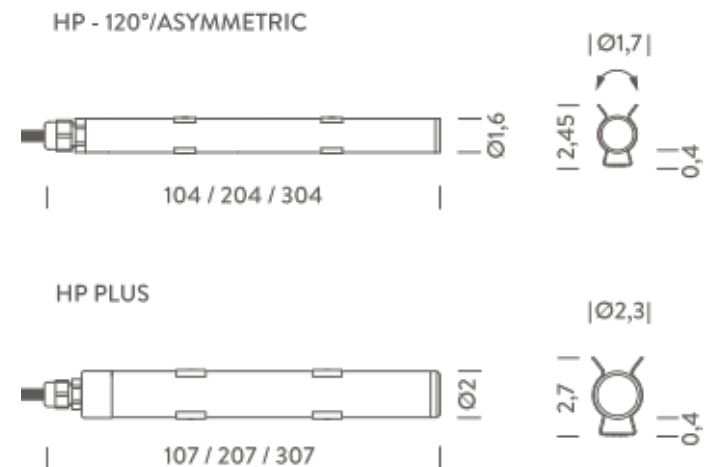

## 2M | 3000K HP - ASYMMETRIC

### LAMPING

Source	Linear LED
Total power	29W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2860lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

### Codes

BBOK0920241WPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

### Certificazioni

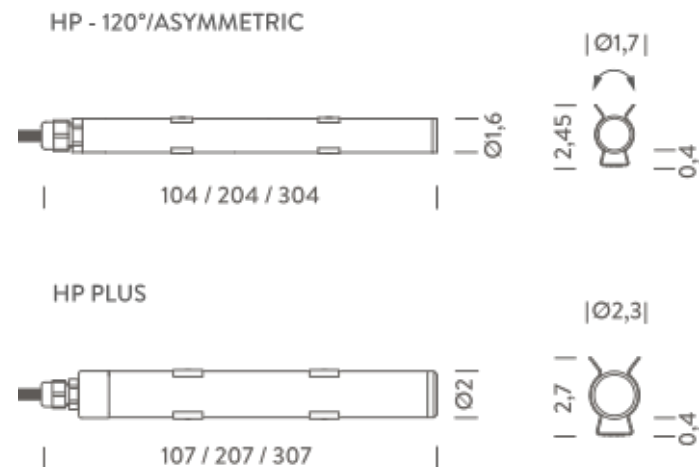

## 2M | 4000K HP - ASYMMETRIC

### LAMPING

Source	Linear LED
Total power	29W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3320lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

### Codes

BBOK0920241NPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

### Certificazioni

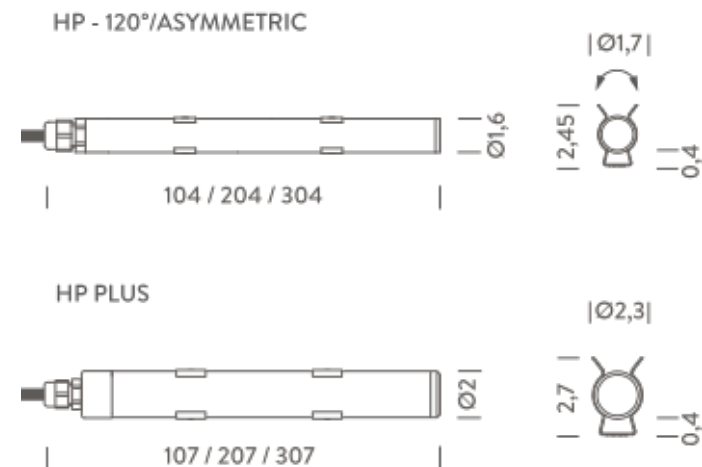

## 3M | 2700K HP

### LAMPING

Source	Linear LED
Total power	42W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4500lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

### Codes

BBOK0930041DPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

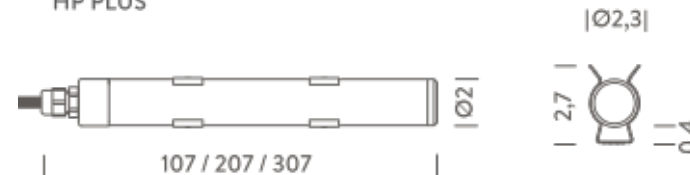

## 3M | 3000K HP

### LAMPING

Source	Linear LED
Total power	42W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4800lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

### Codes

BBOK0930041WPC

### Structure

transparent

### PACKAGE


Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


### Certificazioni



HP - 120°/ASYMMETRIC

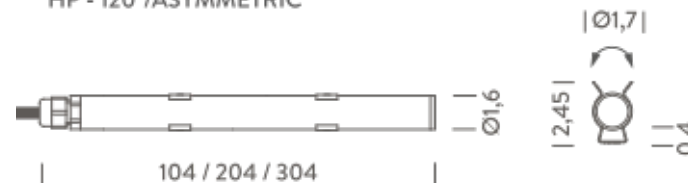

HP PLUS

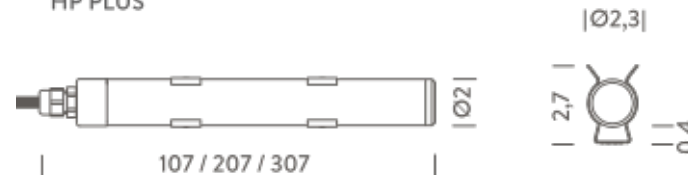

## 3M | 4000K HP

### LAMPING

Source	Linear LED
Total power	42W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5640lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

### Codes

BBOK0930041NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

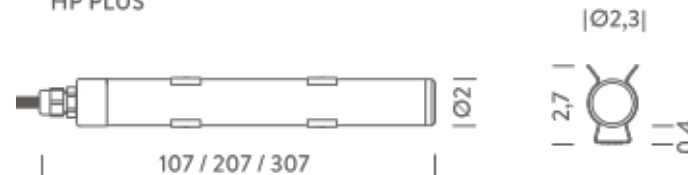



## 3M | 2700K HP - ASYMMETRIC

### LAMPING

Source	LED linear
Total power	42W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4080lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25° C
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Net lamp weight	0,75 kg

### Codes

BBOK0930241DPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

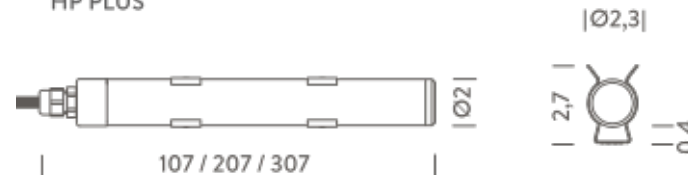

## 3M | 3000K HP - ASYMMETRIC

### LAMPING

Source	Linear LED
Total power	42W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4290lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

### Codes

BBOK0930241WPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

### Certificazioni

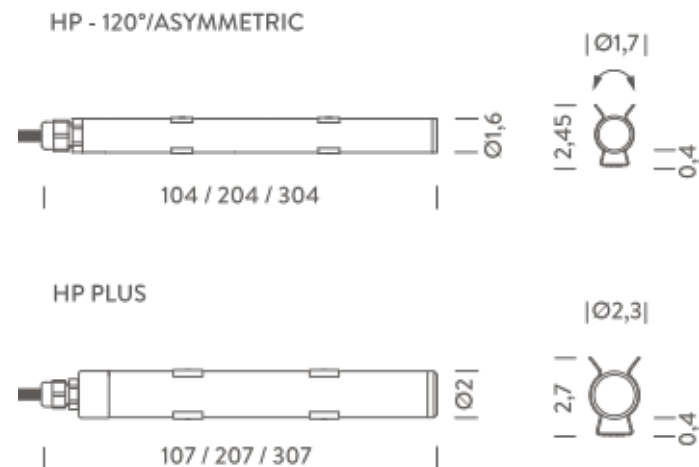

## 3M | 4000K HP - ASYMMETRIC

### LAMPING

Source	Linear LED
Total power	42W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4980lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

### Codes

BBOK0930241NPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

### Certificazioni

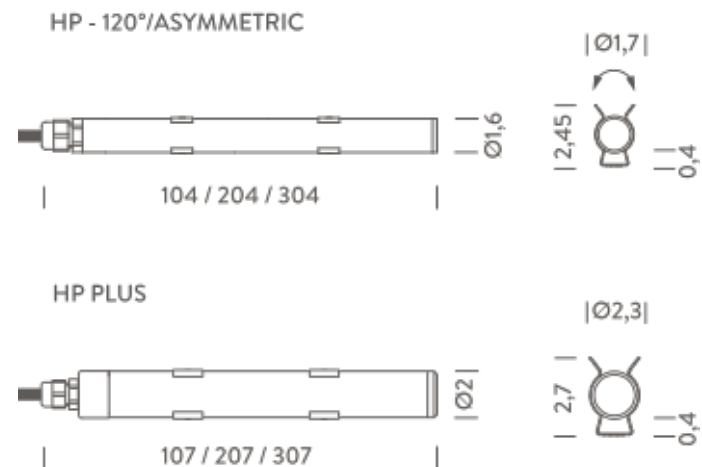

# 1M HP PLUS | 3000K

## LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

## Codes

BBOK0910015WPC

## Structure

transparent

## PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg


## Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

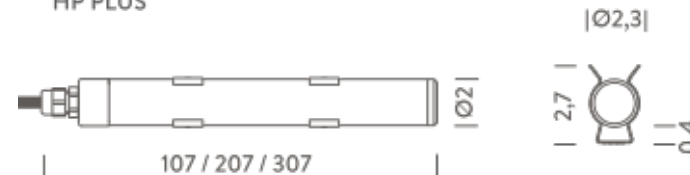

# 1M HP PLUS | 4000K

## LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

## Codes

BBOK0910015NPC

## Structure



transparent

## PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

## Certificazioni

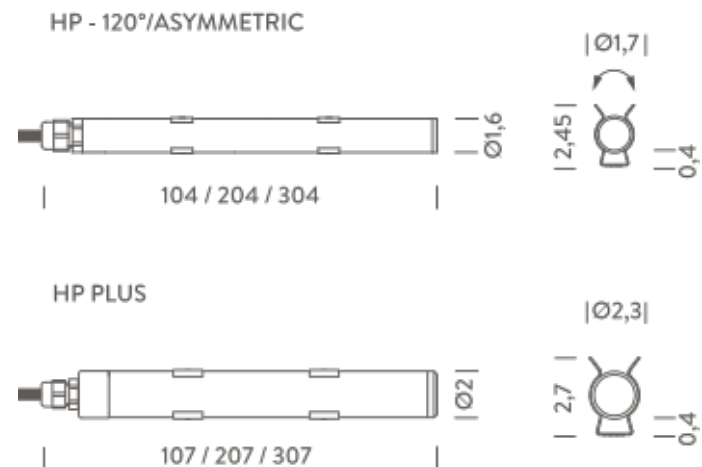

## 2M HP PLUS | 3000K

### LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

### Codes

BBOK0920015WPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

### Certificazioni

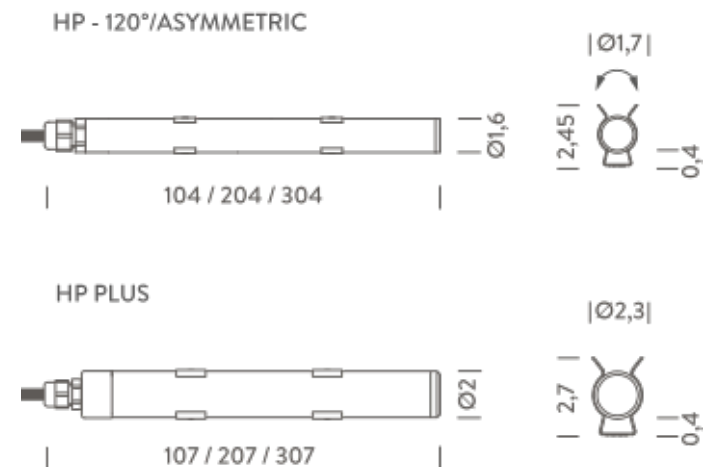

## 2M HP PLUS | 4000K

### LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

### Codes

BBOK0920015NPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

### Certificazioni

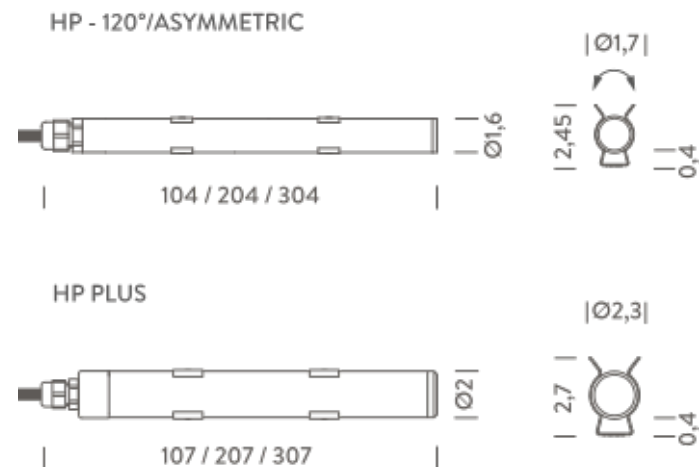

## 3M HP PLUS | 3000K

### LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

### Codes

BBOK0930015WPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

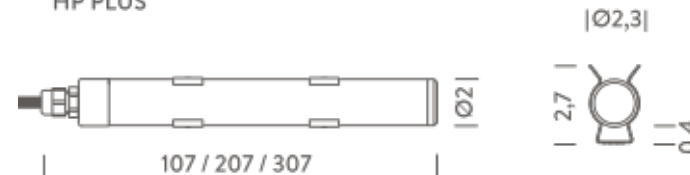



## 3M HP PLUS | 4000K

### LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

### Codes

BBOK0930015NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg

### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

