

MINIFLUX TRANSPARENT

MINIFLUX è un sistema a LED modulare per interni/esterni adatto all'illuminazione in velette, decorativa e d'accento. Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC ad alta emissione. Diffusore in policarbonato trasparente. Il fissaggio avviene tramite staffe in policarbonato trasparente che permettono l'orientabilità del prodotto.

Miniflux è proposto in diverse lunghezze e temperature colore.

Il diametro del tubo in policarbonato varia a seconda del flusso luminoso della lampada.

Alimentatore escluso.



1M | 2700K HP

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1486lm
Initial luminaire efficacy	> 93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910007DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

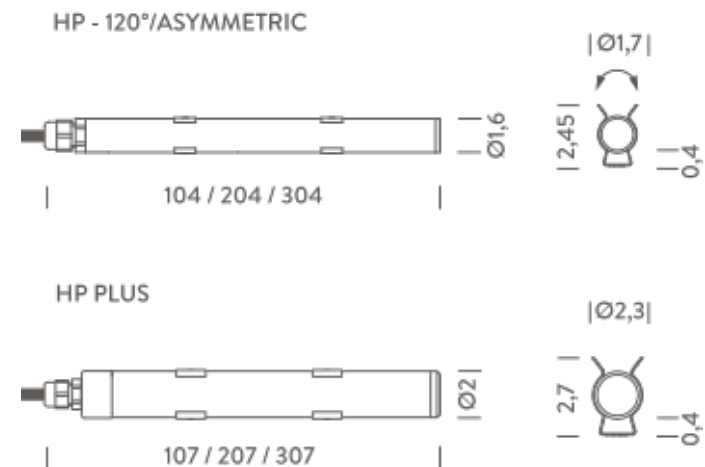

1M | 3000K HP

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1486lm
Initial luminaire efficacy	> 93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910007WPC


Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

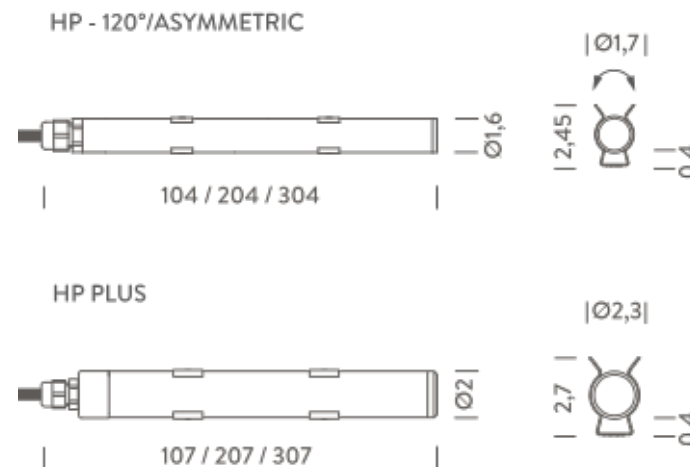

1M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1386lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910207WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

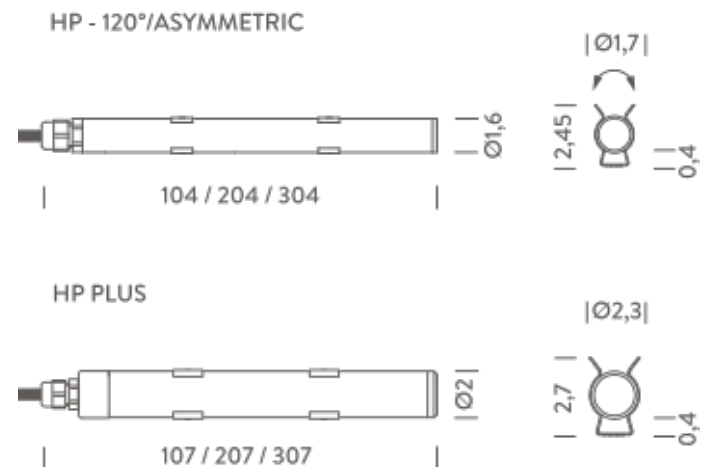

1M | 4000K HP

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1512lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910007NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

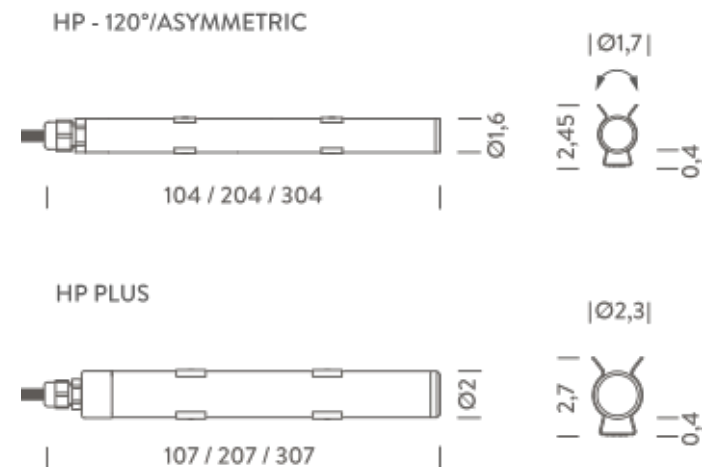

1M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1386lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910207NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

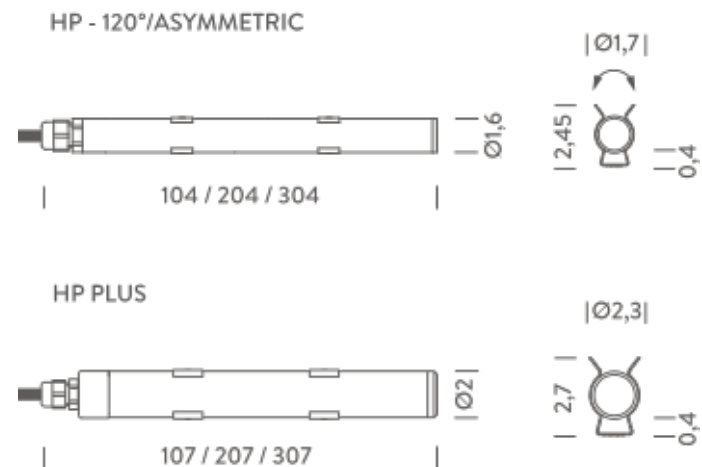

2M | 2700K HP

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	2972lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920007DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

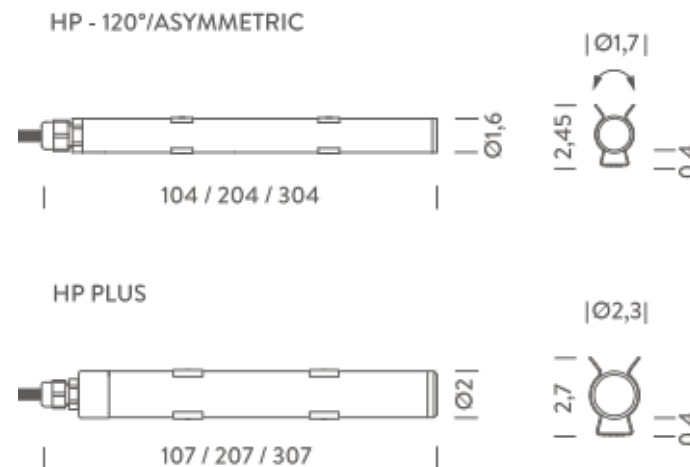

2M | 3000K HP

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2972lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920007WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

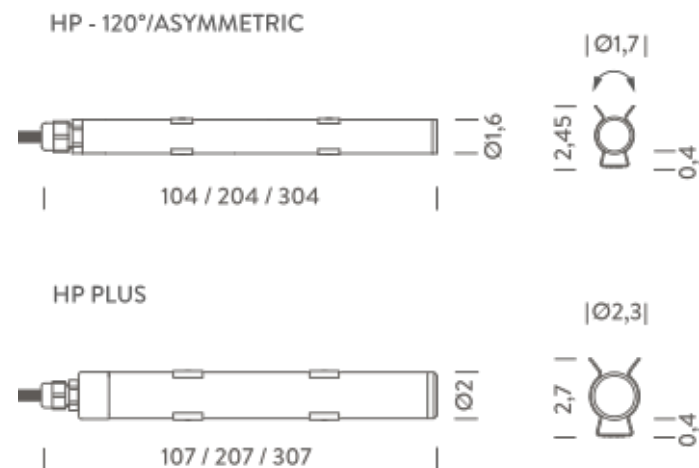

2M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2772lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	∅2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920207WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

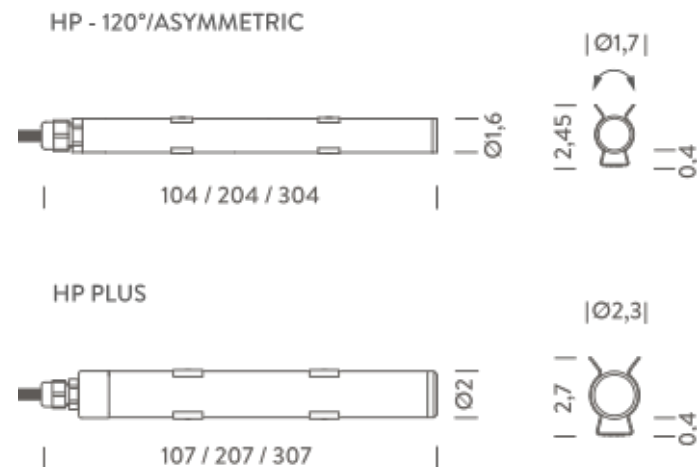

2M | 4000K HP

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3024lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920007NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

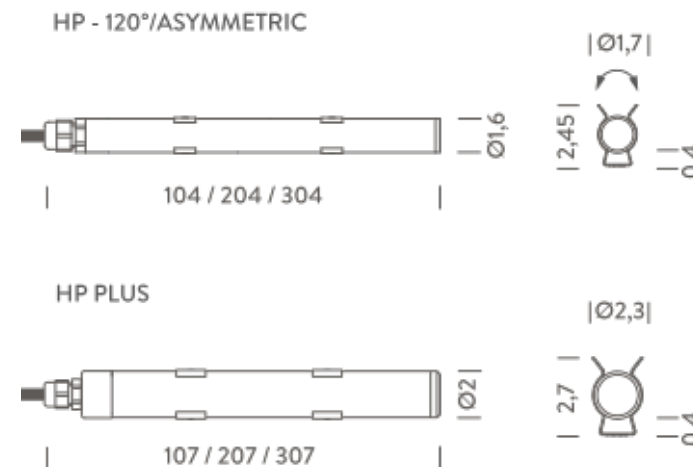

2M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2772lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920207NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

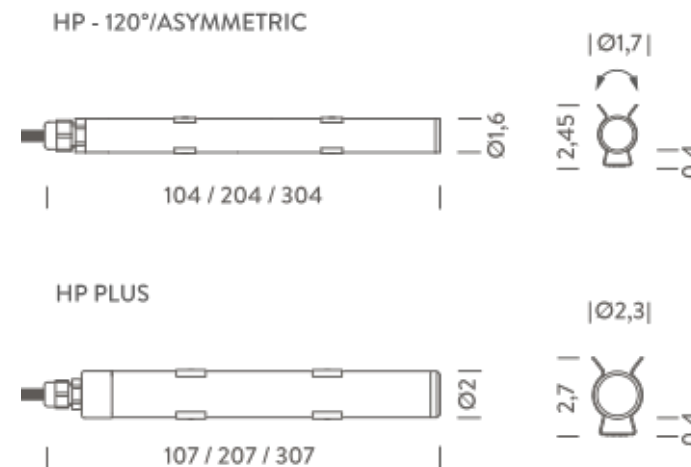

3M | 2700K HP

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4458lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930007DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni

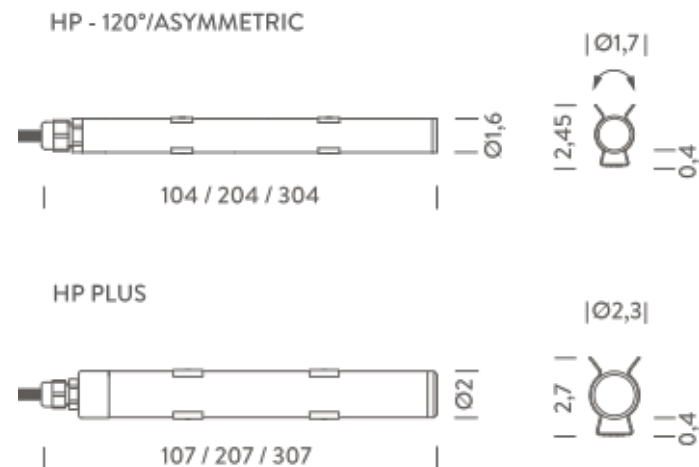

3M | 3000K HP

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4458lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	∅1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930007WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

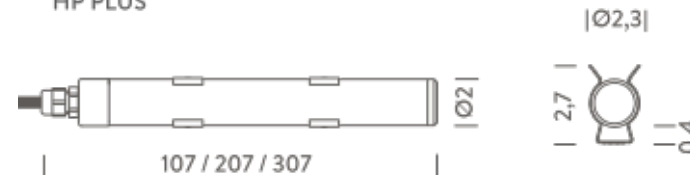

3M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4158lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930207WPC

Structure

transparent

PACKAGE


Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC

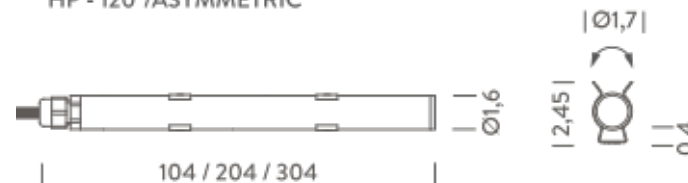

HP PLUS

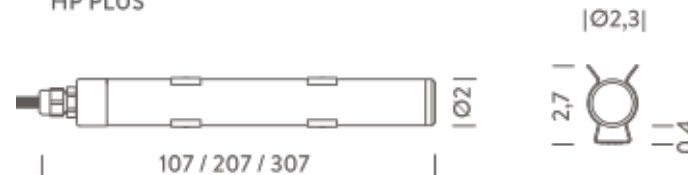

3M | 4000K HP

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4536lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930007NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

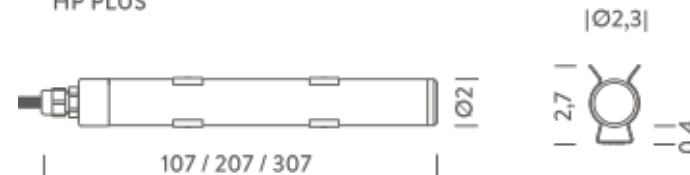

3M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4158lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930207NPC

Structure

transparent

PACKAGE

Package 01 Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

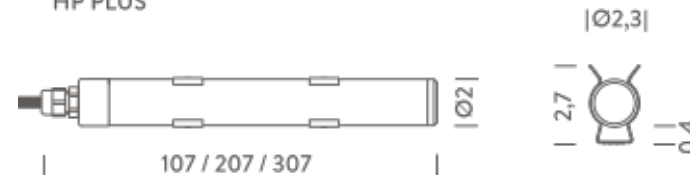

1M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

Codes

BBOK0910015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

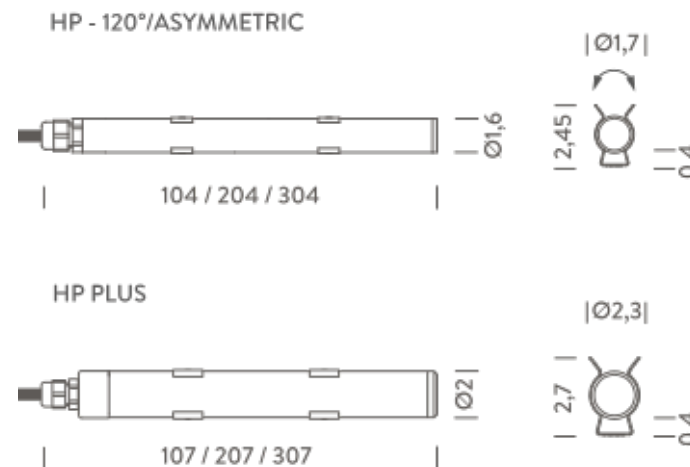

1M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

Codes

BBOK0910015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

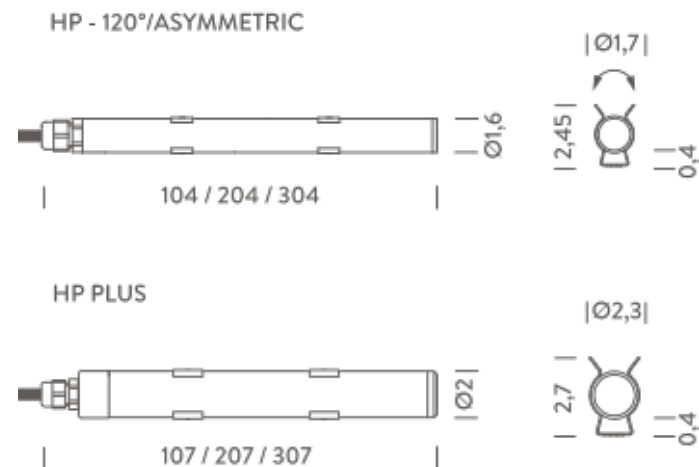

2M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BBOK0920015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

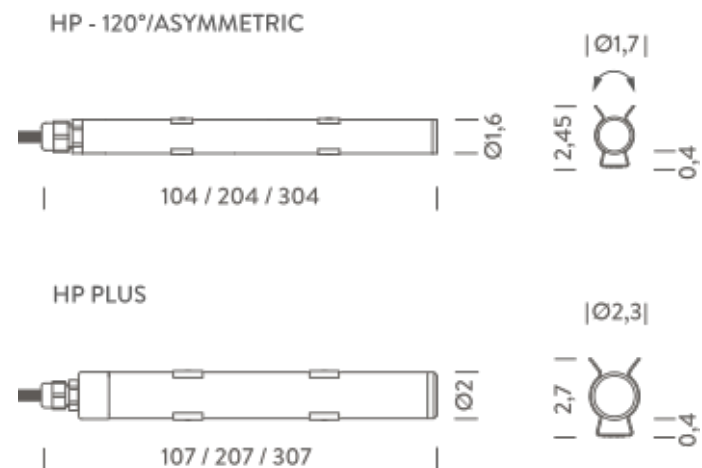

2M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BBOK0920015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

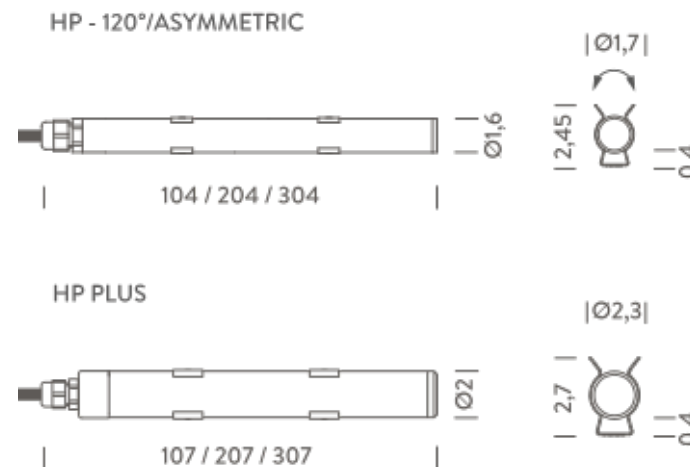

3M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BBOK0930015WPC

Structure

transparent

PACKAGE

Package 01 Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

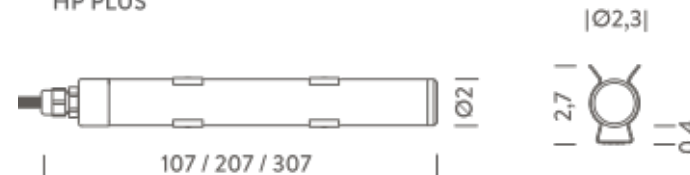

3M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BBOK0930015NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg

Certificazioni

