

# WALKLINE

WALKLINE è un sistema di illuminazione a LED per esterni calpestabile e carrabile. E' composto da un profilo di alluminio anodizzato naturale e una superficie in resina opale per un'omogenea emissione della luce. Walkline viene proposto in differenti lunghezze. È dimmerabile 1-10V, DALI o DMX. Il fissaggio avviene tramite cassaforma a pavimento (inclusa)



0,50M | 4000K

## LAMPING

Source	Linear LED
Total power	7,5W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	325lm
Initial luminaire efficacy	> 40lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x50,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

## Codes

BWLK0205G26NAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 50x3x9 cm / Gross weight: 3,5 kg

## Certificazioni

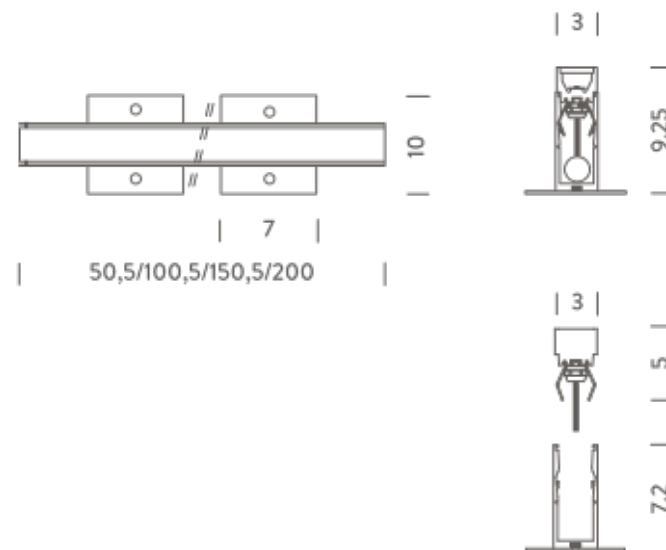

0,50M | 6000K

### LAMPING

Source	Linear LED
Total power	7,5W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x50,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

### Codes

BWLK0205G260AA


### Structure

grey

### PACKAGE

Package 01 Dimension: 50x3x9 cm / Gross weight: 3,5 kg

### Certificazioni

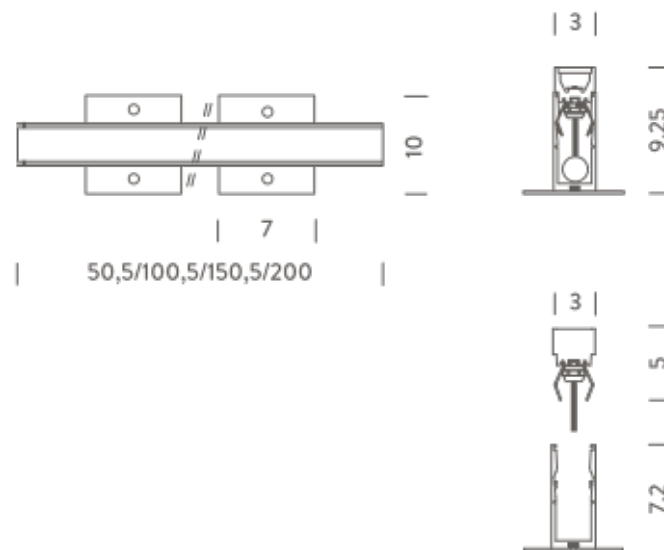

1M | 4000K

## LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Initial luminaire efficacy	> 40lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

## Codes

BWLK0210G26NAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 100x3x9 cm / Gross weight: 5,25 kg

## Certificazioni

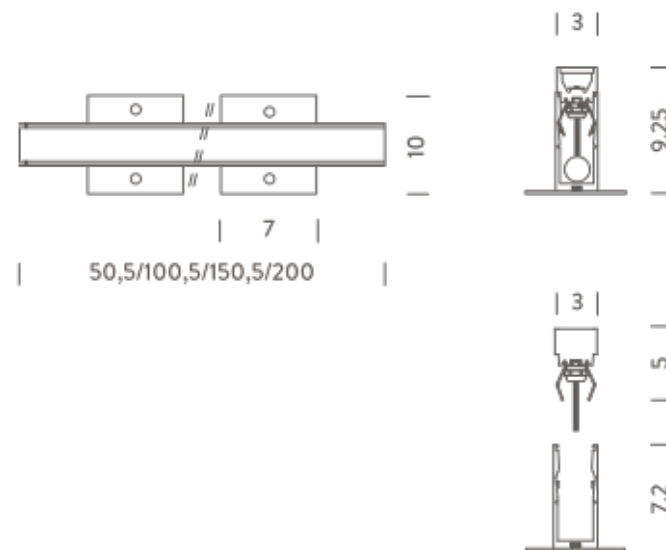

1M | 6000K

## LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,255x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

## Codes

BWLK0210G260AA

## Structure


grey

## PACKAGE

Package 01

Dimension: 100x3x9 cm / Gross weight: 5,25 kg

## Certificazioni

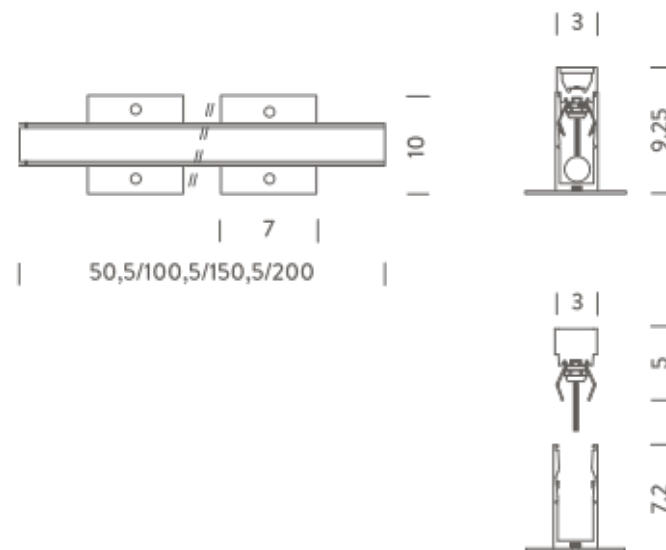

1,5M | 4000K

## LAMPING

Source	Linear LED
Total power	22,5W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	975lm
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,255x150,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

## Codes

BWLK0215G26NAA

## Structure


grey

## PACKAGE

Package 01

Dimension: 150x3x9 cm / Gross weight: 1,75 kg

## Certificazioni

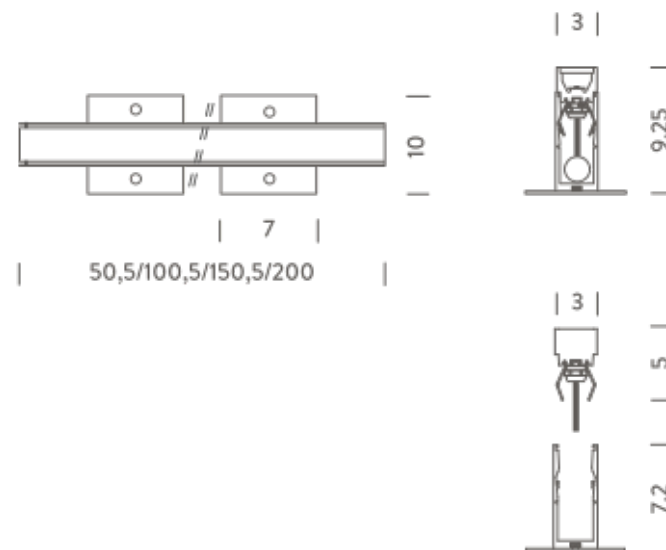

1,5M | 6000K

## LAMPING

Source	Linear LED
Total power	22,5W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,255x150,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

## Codes

BWLK0215G260AA


## Structure

grey

## PACKAGE

Package 01 Dimension: 150x3x9 cm / Gross weight: 0,55 kg

## Certificazioni

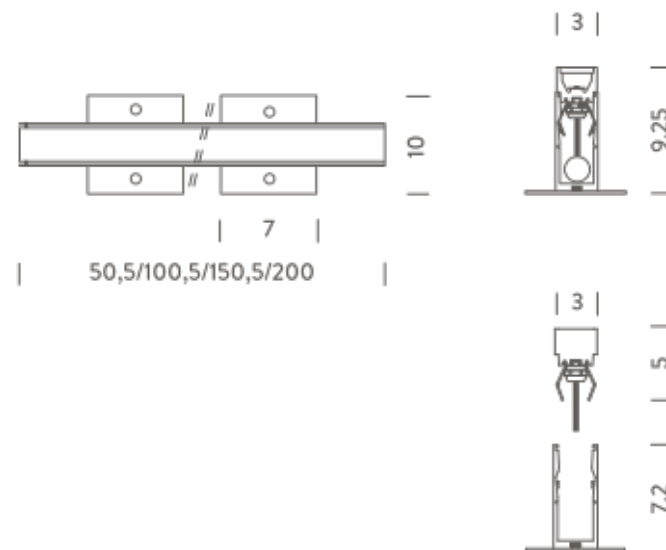

2M | 4000K

## LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x200,5cm
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

## Codes

BWLK0220G26NAA

## Structure



grey

## PACKAGE

Package 01

Dimension: 200x3x9 cm / Gross weight: 7 kg

## Certificazioni

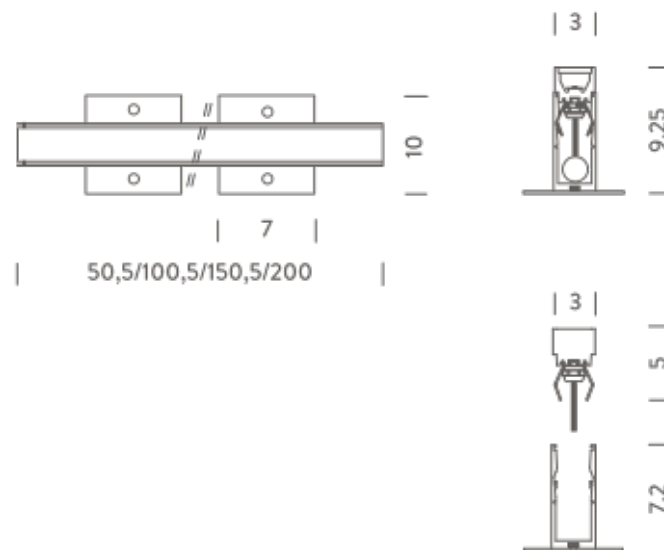



2M | 6000K

## LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x200,5cm
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

## Codes

BWLK0220G260AA

## Structure

grey

## PACKAGE

Package 01

Dimension: 200x3x9 cm / Gross weight: 7 kg

## Certificazioni

