

KIROPS RECESSED

Kirops recessed è un downlight a LED ad incasso per esterni.

E' proposto con due differenti potenze e tre fasci ottici è temperatura colore di 4000K.

L'alimentatore remoto (ON-OFF) è incluso e il fissaggio avviene tramite molle. UGR<19



4000K - 14W | 14°

LAMPING

| | |
|---------------------------------|---------------------------------|
| Source | LED spot |
| Total power | 14W |
| Emission | Direct 14° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 1500lm |
| Initial luminaire efficacy | >100lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | > 80 |
| Energy class | A+ |
| IP class | 65 |
| Dimensions | ø14x13,3cm |
| Materials | Aluminum |
| Ambient temperature range | -20°C / 35°C |
| Performance ambient temperature | 25°C |
| Notes | Remote driver (ON-OFF) included |
| Net lamp weight | 1,6 kg |

Codes

MKIRO201F02NAA

Structure


grey

PACKAGE


Package 01

Dimension: 28x26,5x18,5 cm / Gross weight: 1,75 kg

Certificazioni



Ø 14

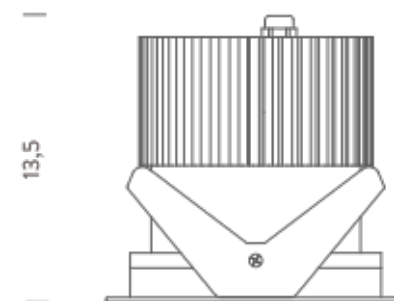

13,5

4000K - 14W | 21°

LAMPING

| | |
|---------------------------------|---------------------------------|
| Source | LED spot |
| Total power | 14W |
| Emission | Direct 21° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 1500lm |
| Initial luminaire efficacy | >100lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | > 80 |
| Energy class | A+ |
| IP class | 65 |
| Dimensions | ø14x13,3cm |
| Materials | Aluminum |
| Ambient temperature range | -20°C / 35°C |
| Performance ambient temperature | 25°C |
| Notes | Remote driver (ON-OFF) included |
| Net lamp weight | 1,6 kg |

Codes

MKIRO201502NAA

Structure


grey

PACKAGE

Package 01

Dimension: 28x26,5x18,5 cm / Gross weight: 1,75 kg

Certificazioni

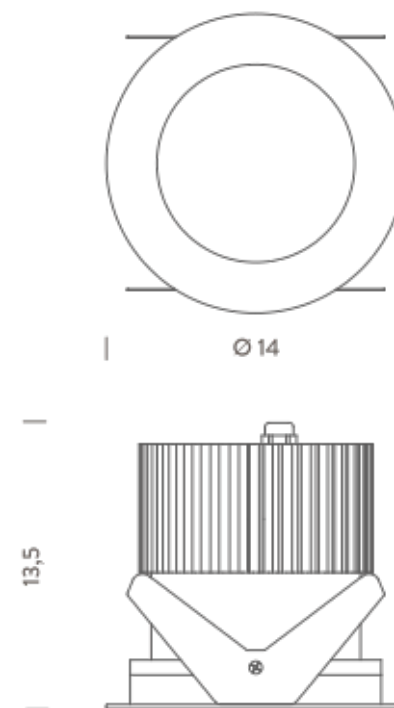

4000K - 14W | 44°

LAMPING

| | |
|---------------------------------|---------------------------------|
| Source | LED spot |
| Total power | 14W |
| Emission | Direct 44° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 1500lm |
| Initial luminaire efficacy | >100lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | > 80 |
| Energy class | A+ |
| IP class | 65 |
| Dimensions | ø14x13,3cm |
| Materials | Aluminum |
| Ambient temperature range | -20°C / 35°C |
| Performance ambient temperature | 25°C |
| Notes | Remote driver (ON-OFF) included |
| Net lamp weight | 1,6 kg |

Codes

MKIRO201802NAA

Structure


grey

PACKAGE

Package 01

Dimension: 28x26,5x18,5 cm / Gross weight: 1,75 kg

Certificazioni

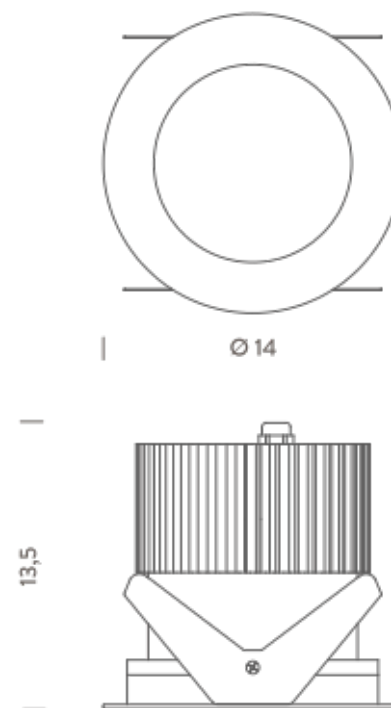

4000K - 19W | 14°

LAMPING

| | |
|---------------------------------|---------------------------------|
| Source | LED spot |
| Total power | 19W |
| Emission | Direct 14° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 2000lm |
| Initial luminaire efficacy | >100lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | > 80 |
| Energy class | A+ |
| IP class | 65 |
| Dimensions | ø14x13,3cm |
| Materials | Aluminum |
| Ambient temperature range | -20°C / 35°C |
| Performance ambient temperature | 25°C |
| Notes | Remote driver (ON-OFF) included |
| Net lamp weight | 1,6 kg |

Codes

MKIRO202F02NAA

Structure


grey

PACKAGE

Package 01

Dimension: 28x26,5x18,5 cm / Gross weight: 1,75 kg

Certificazioni

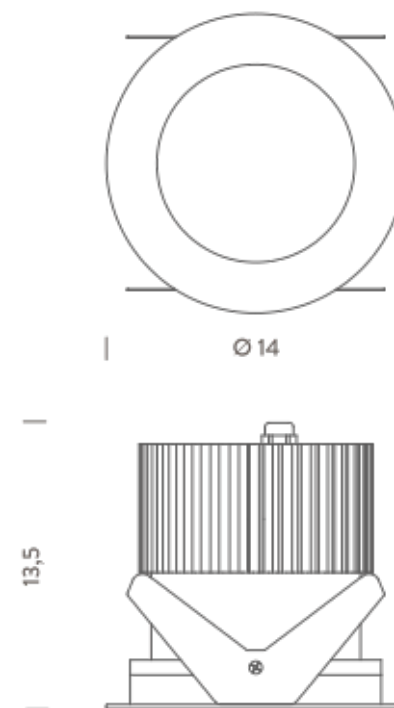

4000K - 19W | 21°

LAMPING

| | |
|---------------------------------|---------------------------------|
| Source | LED spot |
| Total power | 19W |
| Emission | Direct 21° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 2000lm |
| Initial luminaire efficacy | >100lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | > 80 |
| Energy class | A+ |
| IP class | 65 |
| Dimensions | ø14x13,3cm |
| Materials | Aluminum |
| Ambient temperature range | -20°C / 35°C |
| Performance ambient temperature | 25°C |
| Notes | Remote driver (ON-OFF) included |
| Net lamp weight | 1,6 kg |

Codes

MKIRO202502NAA

Structure


grey

PACKAGE


Package 01

Dimension: 28x26,5x18,5 cm / Gross weight: 1,75 kg

Certificazioni



Ø 14

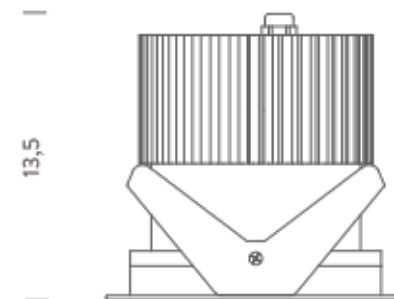

4000K - 19W | 44°

LAMPING

| | |
|---------------------------------|---------------------------------|
| Source | LED spot |
| Total power | 19W |
| Emission | Direct 44° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 2000lm |
| Initial luminaire efficacy | > 15lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | > 80 |
| Energy class | A+ |
| IP class | 65 |
| Dimensions | ø14x13,3cm |
| Materials | Aluminum |
| Ambient temperature range | -20°C / 35°C |
| Performance ambient temperature | 25°C |
| Notes | Remote driver (ON-OFF) included |
| Net lamp weight | 1,6 kg |

Codes

MKIRO202802NAA

Structure

grey

PACKAGE

Package 01

Dimension: 28x26,5x18,5 cm / Gross weight: 1,75 kg

Certificazioni

