

LUX SPOT

La collezione LUX, caratterizzata da spot dalle ridotte dimensioni per applicazioni outdoor, si arricchisce con versioni più potenti per rispondere alla necessità di un'illuminazione più performante.

Lux Spot è disponibile in due potenze per consentire massima flessibilità per differenti esigenze, finiture, temperature colore e fasci ottici. Staffa per installare lo spot e regolare l'orientamento. Lo spot può essere installato anche mediante picchetto.



4,2W | 3000K - 17°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Peg Lux S,
Net lamp weight	0.35 kg

Codes

BLUS1801N21WAA
BLUS1801N21WAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

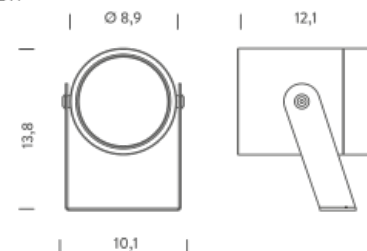

4,2W | 3000K - 46°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Peg Lux S,
Net lamp weight	0.35 kg

Codes

BLUS1801F21WAA
BLUS1801F21WAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

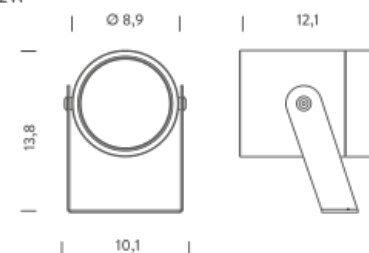

4,2W | 4000K - 17°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Peg Lux S,
Net lamp weight	0.35 kg

Codes

BLUS1801N21NAA
BLUS1801N21NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

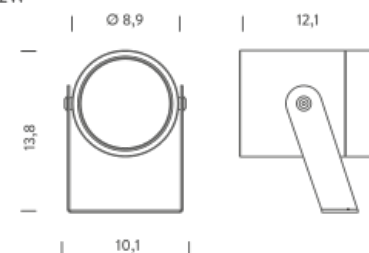

4,2W | 4000K - 46°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Peg Lux S,
Net lamp weight	0.35 kg

Codes

BLUS1801F21NAA
BLUS1801F21NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

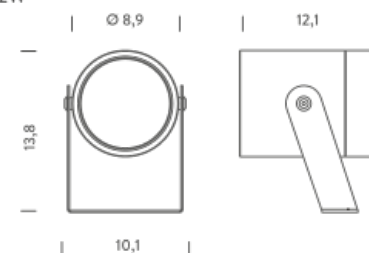

12W | 2700K - 14°

LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	2700K
Luminous flux	1040lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

Codes

BLUS1801N43DAA
BLUS1801N43DAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

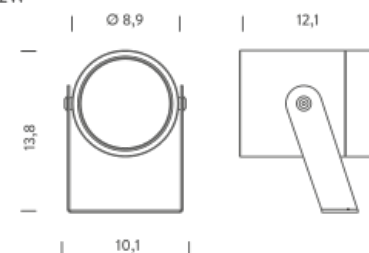

12W | 2700K - 53°

LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

Codes

BLUS1801H43DAA
BLUS1801H43DAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


Certificazioni



LUX SPOT 4,2W

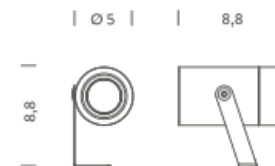

LUX SPOT 12W

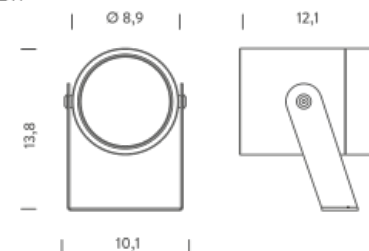

12W | 3000K - 14°

LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	3000K
Luminous flux	1100lm
Initial luminaire efficacy	92lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

Codes

BLUS1801N43WAA
BLUS1801N43WAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

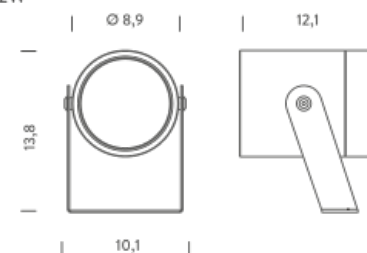

12W | 3000K - 53°

LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	3000K
Luminous flux	950lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

Codes

BLUS1801H43WAA
BLUS1801H43WAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

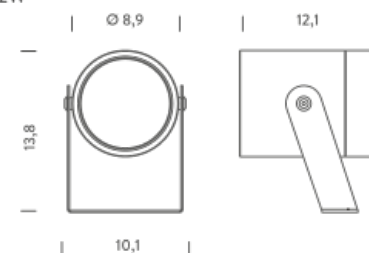

12W | 4000K - 14°

LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

Codes

BLUS1801N43NAA
BLUS1801N43NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

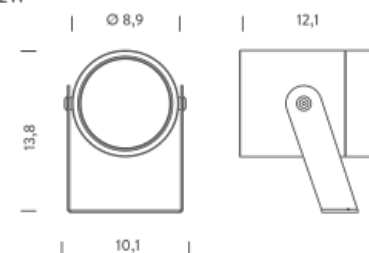

12W | 4000K - 53°

LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

Codes

BLUS1801H43NAA
BLUS1801H43NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg

Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

