

LUX GARDEN

La collezione LUX racchiude una selezione di spots dalle ridotte dimensioni ed alte performance, dedicati all'illuminazione in esterni.

Lux Garden, è orientabile e regolabile nell'installazione outdoor nel terreno grazie ad un'apposita asticella. Il faretto scorre sull'asta permettendone il posizionamento a piacere.

Gli spots sono disponibili con differenti finiture, temperature colore e fasci ottici e dimmerabili 1-10V e DALI.



3000K | 17°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x80
Materials	anodized aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,
Net lamp weight	0.4 kg

Codes

BLUG3001N21WAA
BLUG3001N21WAN
BLUG3001N21WVE

Structure

grey
black
green


PACKAGE

Package 01 Dimension: 110x12x12 cm / Gross weight: 1,42 kg

Certificazioni



NEMO^{3,000}

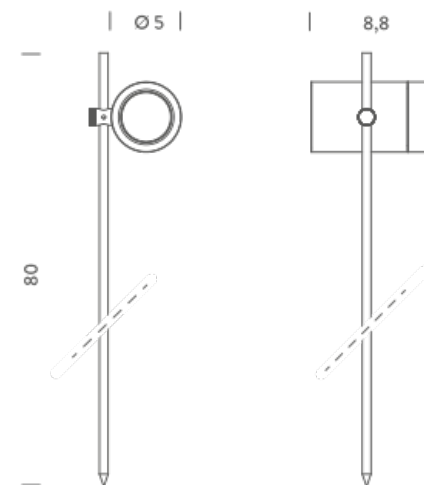

3000K | 46°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	accordi to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x80
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,
Net lamp weight	0.4 kg

Codes

BLUG3001F21WAA
BLUG3001F21WAN
BLUG3001F21WVE

Structure

grey
black
green


PACKAGE

Package 01 Dimension: 110x12x12 cm / Gross weight: 1,42 kg

Certificazioni



NEMO^{3,000}

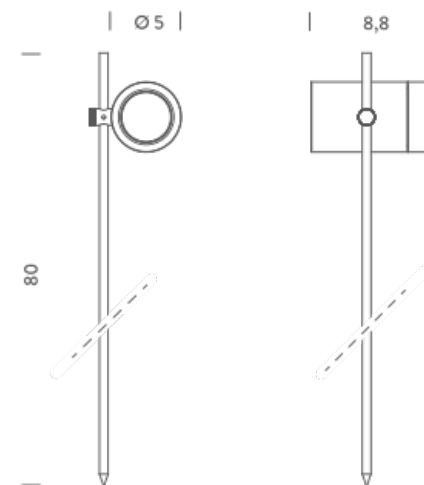

4000K | 17°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x80
Materials	anodized aluminum
Ambient temperature range	-20°C//35°C
Performance ambient temperature	25°C
Notes	driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,
Net lamp weight	0.4 kg

Codes

BLUG3001N21NAA
BLUG3001N21NAN
BLUG3001N21NVE

Structure

grey
black
green


PACKAGE

Package 01 Dimension: 110x12x12 cm / Gross weight: 1,42 kg

Certificazioni



NEMO^{3,000}

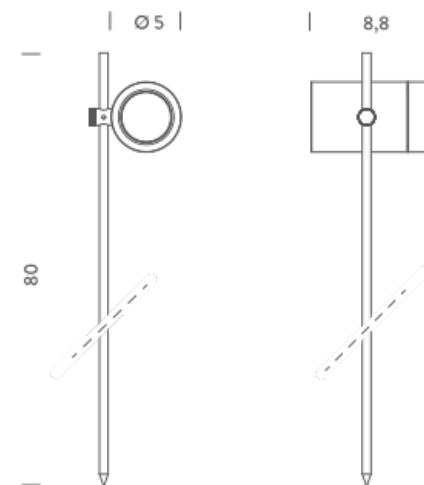

4000K | 46°

LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x80
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,
Net lamp weight	0.4 kg

Codes

BLUG3001F21NAA
BLUG3001F21NAN
BLUG3001F21NVE

Structure

grey
black
green

PACKAGE

Package 01 Dimension: 110x12x12 cm / Gross weight: 1,42 kg

Certificazioni



NEMO^{3,000}

