

# WALKLINE WALL WASHER

WALKLINE è un sistema lineare di illuminazione a LED 24V DC per esterni.

È proposto in due versioni dedicate rispettivamente ad un'illuminazione omogenea, ottenuta tramite una superficie in resina opale o wall-washer, dotato di apposita ottica. La famiglia WALKLINE viene proposta in differenti lunghezze e temperature colore. È dimmerabile 1-10V, DALI o DMX ed il fissaggio avviene tramite cassaforma a pavimento inclusa. WALKLINE e WALKLINE WALL-WASHER hanno un elevato indice di resistenza: sono infatti entrambi calpestabili e carrabili. Trovano applicazione in ambientazioni outdoor con necessità di illuminazione di segnalazione o decorativa.



0,50M | 3000K

## LAMPING

Source	Linear LED
Total power	8W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	625lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


## Codes

BWLK0205226WAA

## Structure

grey

## Certificazioni

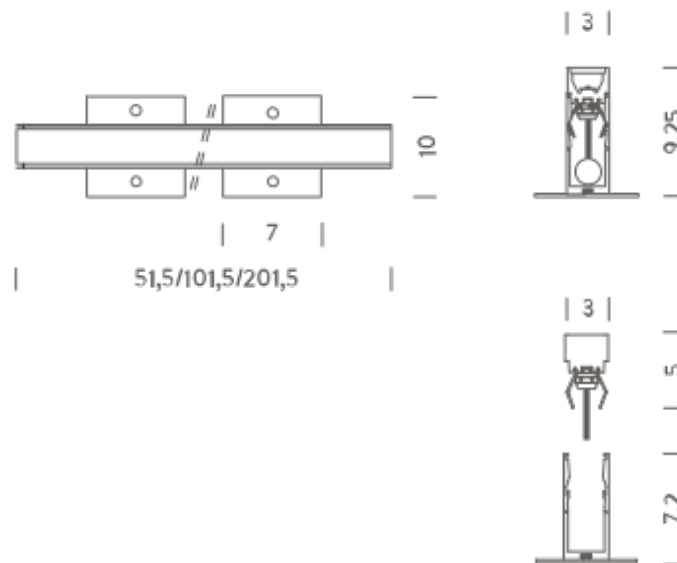

0,50M | 4000K

## LAMPING

Source	Linear LED
Total power	8W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


## Codes

BWLK0205226NAA

## Structure

grey

## Certificazioni

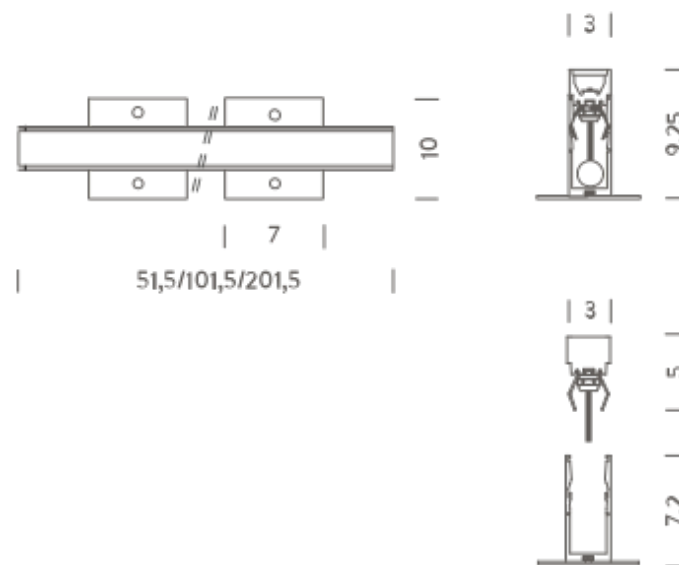

1M | 3000K

## LAMPING

Source	Linear LED
Total power	16W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1250lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


## Codes

BWLK0210226WAA

## Structure

grey

## Certificazioni

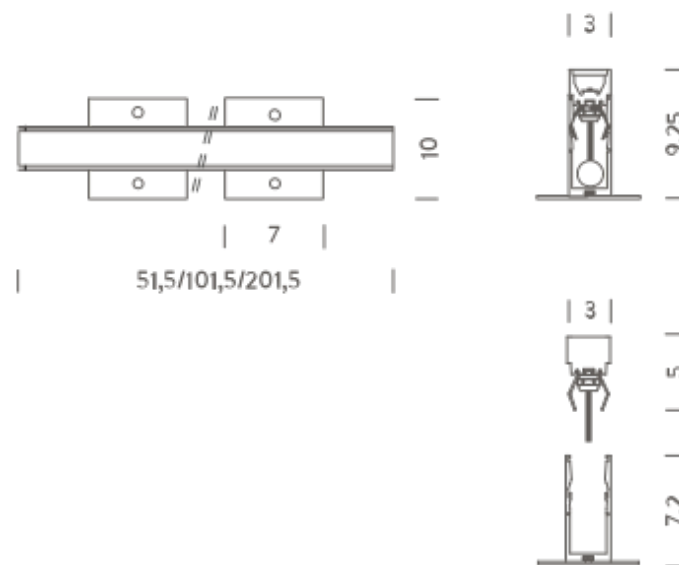

1M | 4000K

### LAMPING

Source	Linear LED
Total power	16W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


### Codes

BWLK0210226NAA

### Structure

grey

### Certificazioni

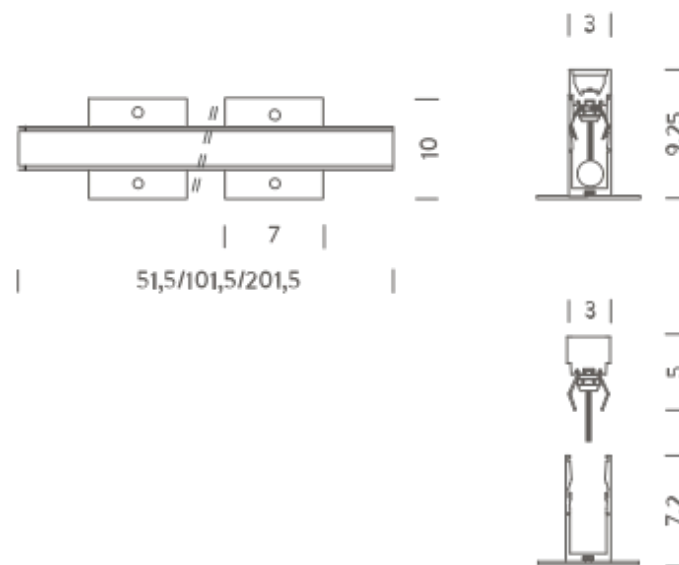

2M | 3000K

## LAMPING

Source	Linear LED
Total power	32W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2500lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

## Codes


BWLK0220226WAA

## Structure

grey

## Certificazioni

UK  
CA

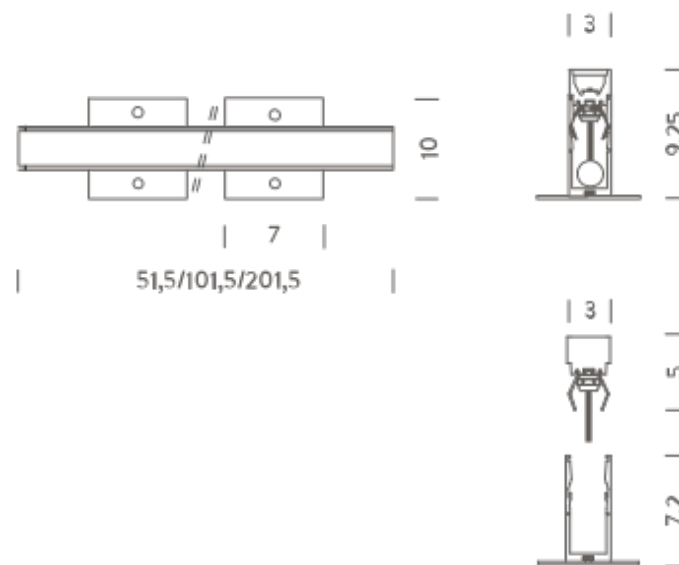

2M | 4000K

## LAMPING

Source	Linear LED
Total power	32W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

## Codes

BWLK0220226NAA

## Structure

grey

## Certificazioni

UK  
CA

