

ZIRKOL LINEAR UGR

Nuova lampada della collezione, ZIRKOL LINEAR UGR è dotata di un particolare gruppo ottico che permette un'emissione diretta con un ridotto indice di abbagliamento ($UGR < 19$). Struttura in alluminio disponibile in due finiture e due temperature colore LED. Dotata di rosone e sistema di controllo DALI, è particolarmente adatta all'utilizzo in uffici e in ambienti di lavoro dove è richiesto un elevato comfort visivo.



DOWNLIGHT | 3000K

LAMPING

Source	LED linear
Total power	45W
Emission	Direct UGR<19
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	3600lm
Initial luminaire efficacy	> 87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

Codes

BZRL1614I42WBO

BZRL1614I42WNE

Structure

white


black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

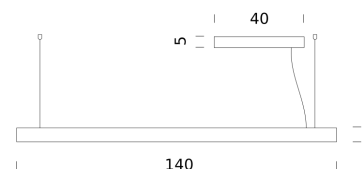

UP-DOWNLIGHT | 3000K

LAMPING

Source	LED linear
Total power	60W
Emission	Direct UGR<19 - Indirect diffused
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	4700lm
Initial luminaire efficacy	> 75 lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

Codes

BZRL1714I49WBO

BZRL1714I49WNE

Structure

white


black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

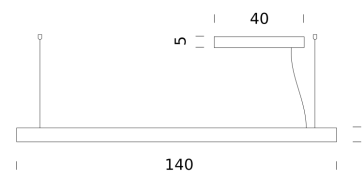

UP-DOWNLIGHT | 4000K

LAMPING

Source	LED linear
Total power	60W
Emission	Direct UGR<19 - Indirect diffused
Switching	DALI
Tension	220/240V
Color temperature	4000K
Luminous flux	4900lm
Initial luminaire efficacy	> 75lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	E
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

Codes

BZRL1714I49NBO

BZRL1714I49NNE

Structure

white

black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

