


ZIRKOL CEILING

Il purismo contemporaneo della collezione Zirkol si estende ora al nuovo Zirkol Ceiling: per la prima volta Nemo Studio propone un'applicazione plafone dello Zirkol C. L'armoniosa cornice circolare si fonde con l'elemento lineare che nasconde il driver integrato attraverso una scatola magnetica.

Disponibile in differenti misure, Zirkol Ceiling risponde sia alle esigenze residenziali che professionali, evitando l'installazione di accessori remoti.

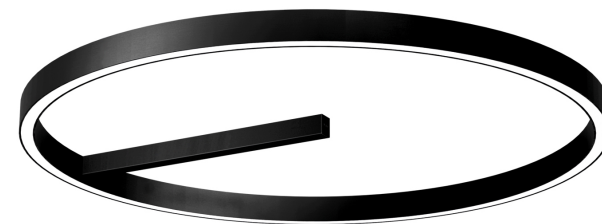

Ø 0,85M | 2700K

LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	2000lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD408G15DBO
BZRCD408G15DNE
BZRCD408G15DOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

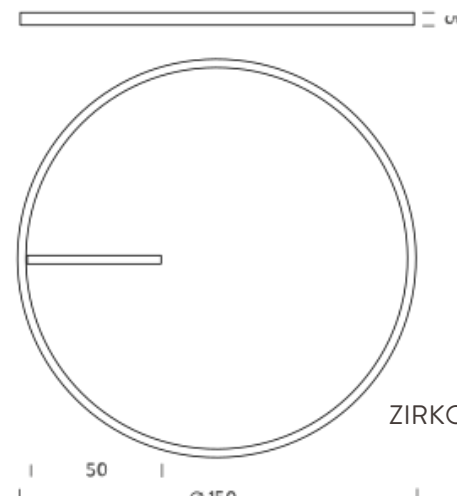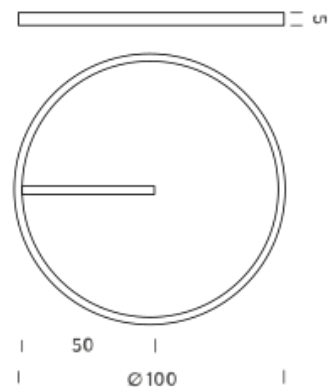

Ø 0,85M | 3000K

LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	2200lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD408G15WBO
BZRCD408G15WNE
BZRCD408G15WOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

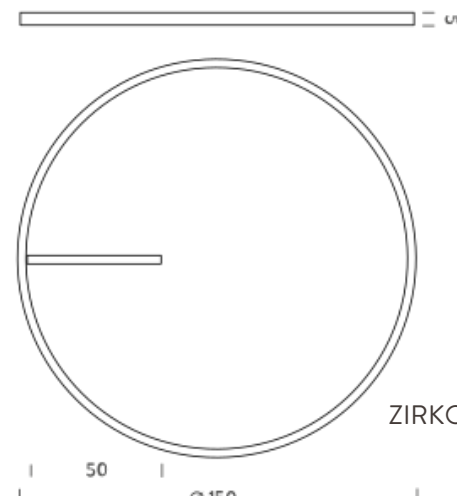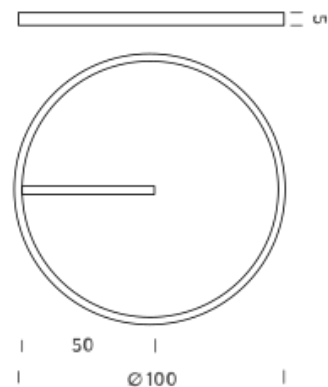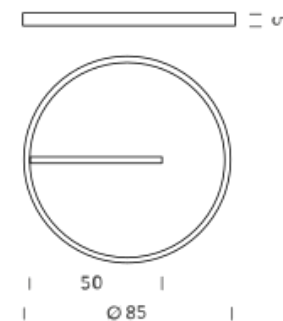

Ø 0,85M | 4000K

LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	2360lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD408G15NBO
BZRCD408G15NNE
BZRCD408G15NOR



Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

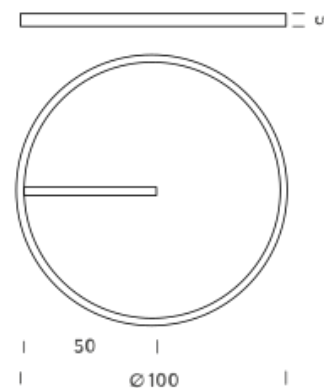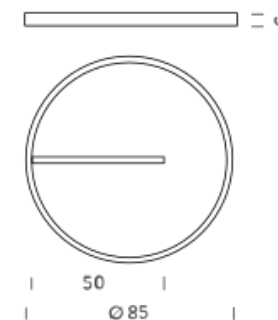

Ø 1M | 2700K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	2616lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD410G15DBO
BZRCD410G15DNE
BZRCD410G15DOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

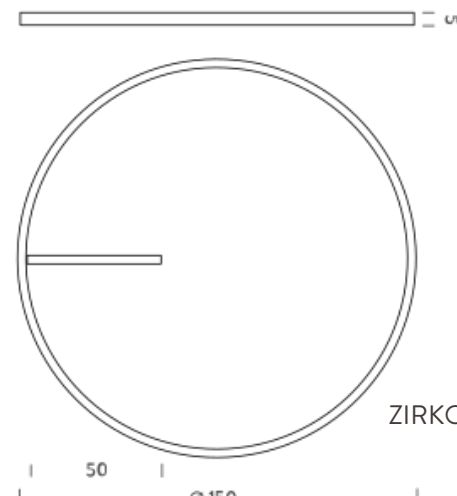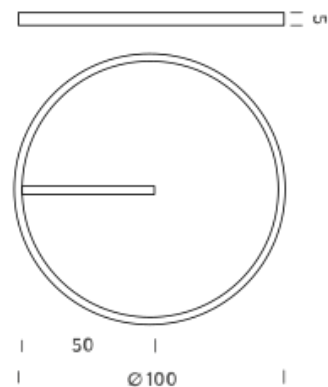

Ø 1M | 3000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminimu
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Codes

BZRCD410G15WBO
BZRCD410G15WNE
BZRCD410G15WOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

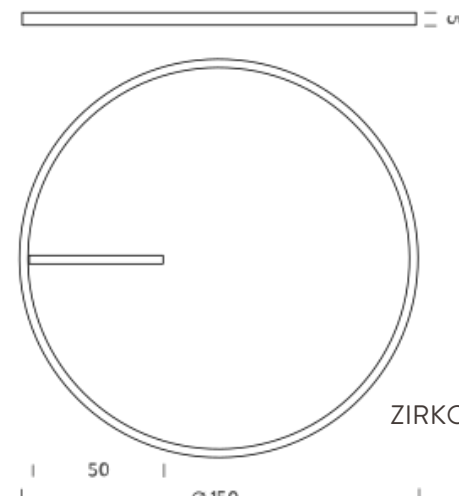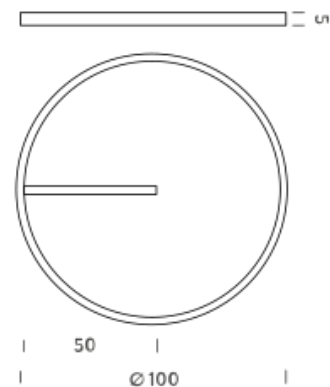

Ø 1M | 4000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD410G15NBO
BZRCD410G15NNE
BZRCD410G15NOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

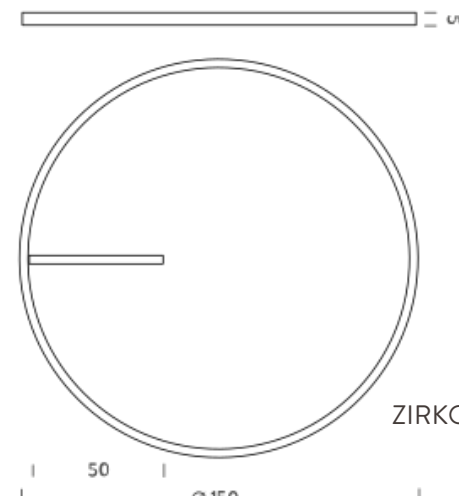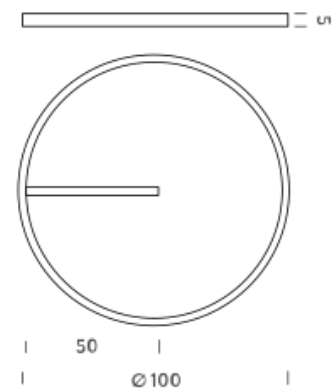

Ø 1,5M | 2700K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD415G15DBO
BZRCD415G15DNE
BZRCD415G15DOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

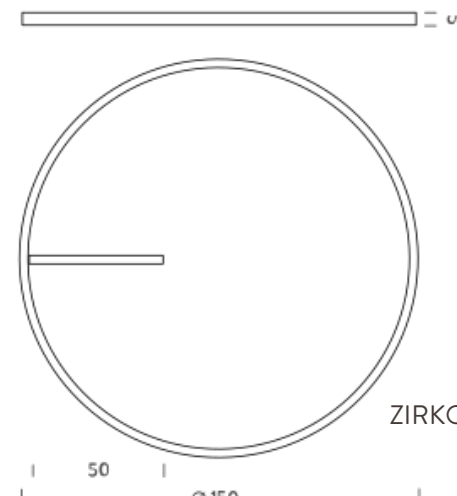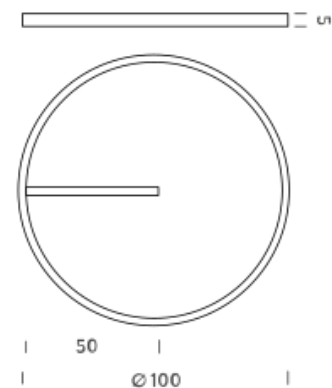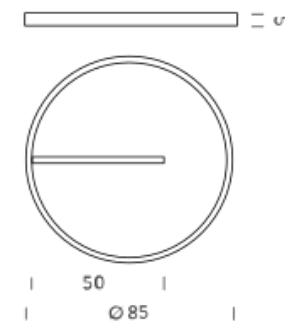

Ø 1,5M | 3000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD415G15WBO
BZRCD415G15WNE
BZRCD415G15WOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

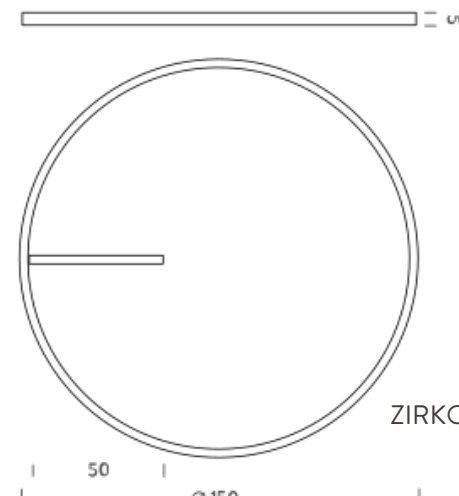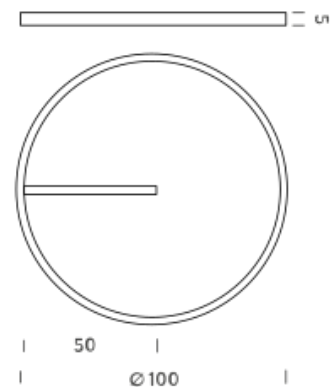

Ø 1,5M | 4000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD415G15NBO
BZRCD415G15NNE
BZRCD415G15NOR

Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

