

LUX CEILING TRIMLESS

La collezione Lux racchiude una selezione di spots ad alte performance, dedicati ad applicazioni in esterni. Lux Ceiling Trimless è la soluzione perfetta per un'illuminazione downlight a scomparsa. Può essere installato in soffitti in cartongesso o legno e garantisce un'illuminazione diretta e omogenea. È disponibile in differenti finiture, temperature colore e fasci ottici.



17° | 3000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 17°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	Cable length 1m, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection, CRI90



Codes

BLUC2101N21WAA
BLUC2101N21WAN

Structure

grey
black

Certificazioni

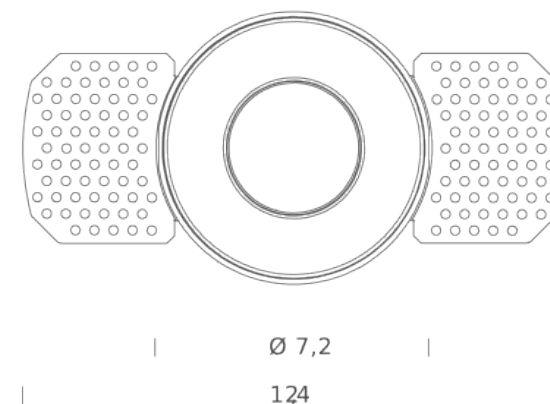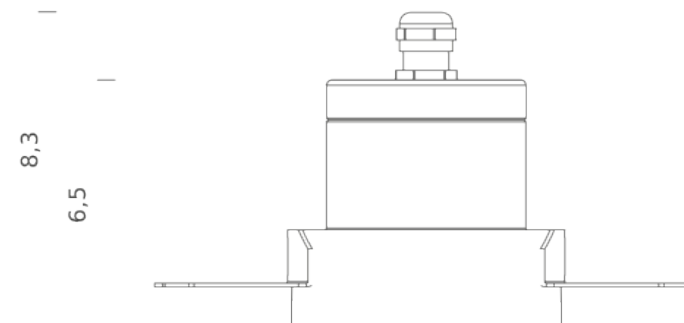

46° | 3000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 46°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	Cable length 1m, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection, CRI90



Codes

BLUC2101721WAA
BLUC2101721WAN

Structure

grey
black

Certificazioni

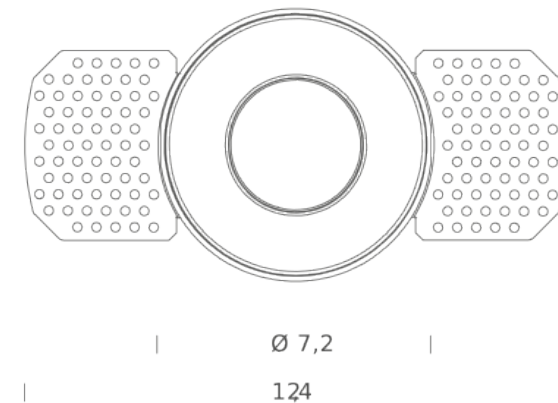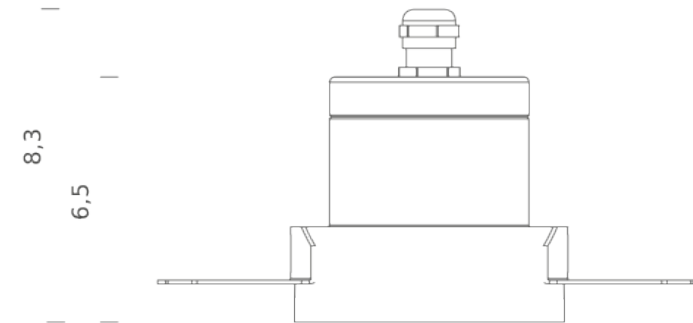

17° | 4000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 17°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	Cable length 1m, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection, CRI90



Codes

BLUC2101N21NAA
BLUC2101N21NAN

Structure

grey
black

Certificazioni

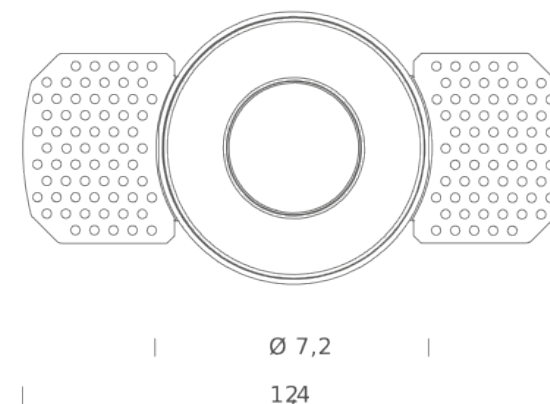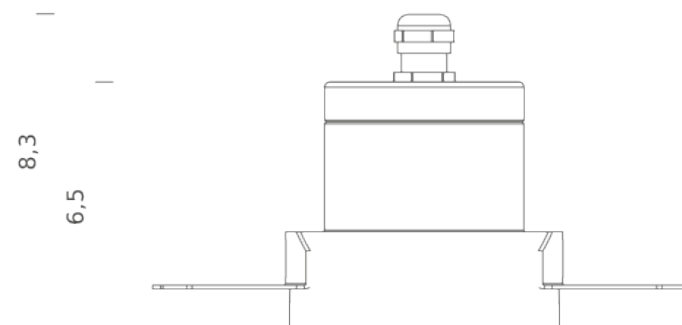

46° | 4000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 46°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	Cable length 1m, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection, CRI90

Codes

BLUC2101721NAA
BLUC2101721NAN

Structure

grey
black

Certificazioni

