

NORMA

Mario Barbaglia

Der röhrenförmige Diffusor aus opalweißem Polycarbonat gibt ein 360° diffuses Licht ab. Struktur aus gebürstetem, poliertem Aluminium.



WALL 25

LAMPING

Source	LED board
Total power	20W
Emission	diffused
Tension	110-240V
Color temperature led	3000K
Luminous flux led	1800lm
Typ CRI	85
Ip class	20
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting
Net lamp weight	1,8 kg

Codes

NOR LLW 35

Structure/Diffuser



chrome/white

PACKAGE

Package 01

Dimension: 37x36x14 cm / Gross weight: 2,5 kg

Certificazioni

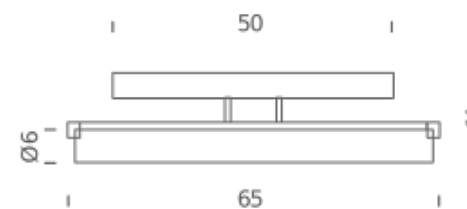

WALL 65

LAMPING

Source	LED board
Total power	17,5W
Emission	diffused
Switching	dimnable, DALI, push
Tension	230V
Color temperature led	3000K
Luminous flux led	1444lm
Typ CRI	85
Ip class	20
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting, also available in 120V
Net lamp weight	3 kg

Codes

NOR LLW 32


Structure/Diffuser

chrome/white

PACKAGE

Package 01	Dimension: 35x75x15 cm / Gross weight: 4 kg
------------	---

Certificazioni

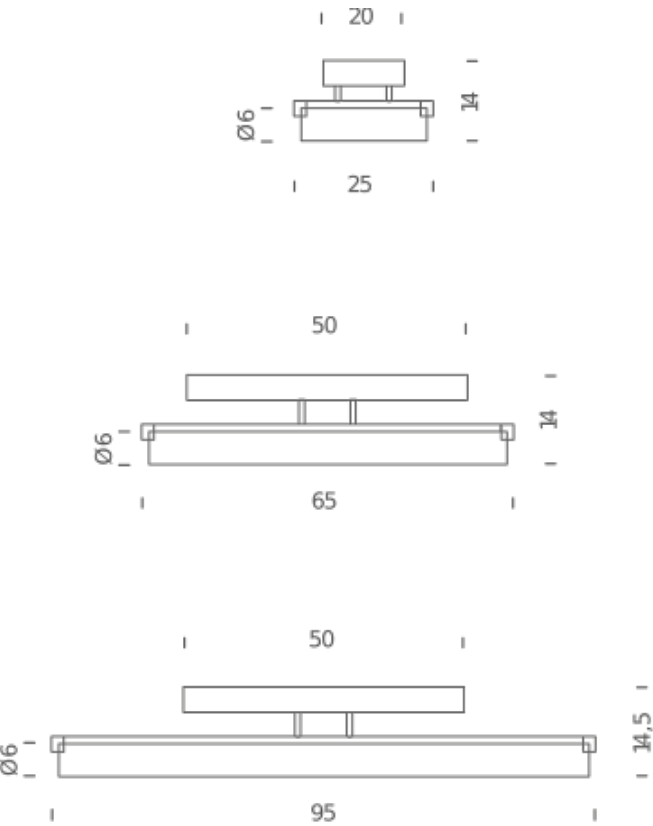

WALL 95

LAMPING

Source	LED board
Total power	27W
Emission	diffused
Switching	dimnable 1-10V, push
Tension	230V
Color temperature led	3000K
Luminous flux led	2400lm
Typ CRI	85
Ip class	20
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting, also available in 120V
Net lamp weight	5 kg

Codes

NOR LLW 33

Structure/Diffuser

chrome/white

PACKAGE

Package 01	Dimension: 35x110x15 cm / Gross weight: 6 kg
------------	--

Certificazioni

