


# ELLISSE PENDANT MAJOR

*Federico Palazzari*

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.

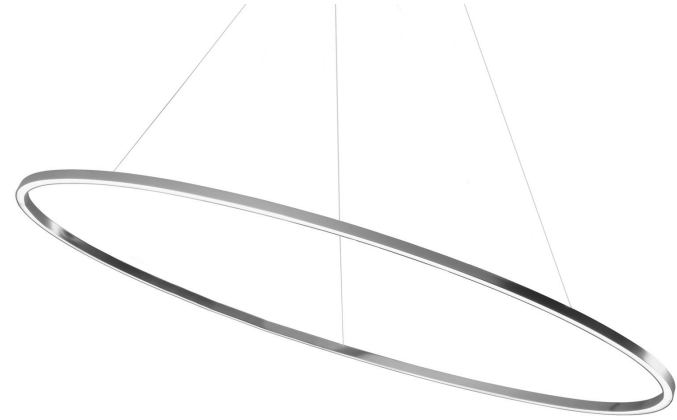

# DOWNLIGHT 2700K

## LAMPING

|                       |                                                                                              |
|-----------------------|----------------------------------------------------------------------------------------------|
| Source                | linear LED                                                                                   |
| Total power           | 69W                                                                                          |
| Emission              | diffused                                                                                     |
| Switching             | dimnable 1-10V                                                                               |
| Tension               | 110-240V                                                                                     |
| Color temperature led | 2700K                                                                                        |
| Luminous flux led     | 3450lm                                                                                       |
| Typ CRI               | 85                                                                                           |
| Ip class              | 20                                                                                           |
| Materials             | Aluminium                                                                                    |
| Notes                 | adjustable cable length from 2,5m to 0,4m, DALI version on request, TRIAC VERSION on request |

## Codes

ELP LW2 54  
ELP LN2 54  
ELP LO2 54  
ELP LL2 54  
ELP LGW 54


## Structure

white  
black  
gold painted  
polished aluminium  
gold polished anodized

## PACKAGE

Package 01      Dimension: 15x80x150 cm / Gross weight: 7,5 kg

## Certificazioni

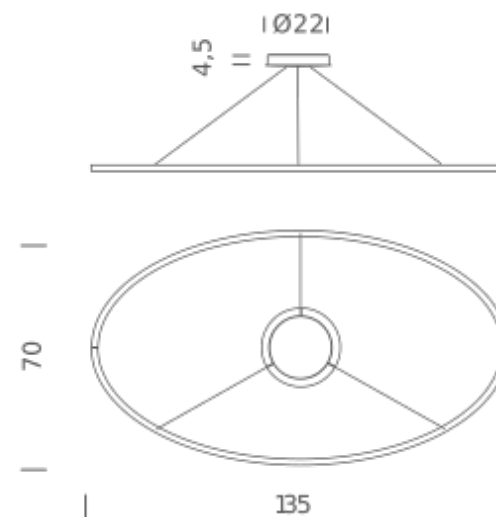

## DOWNLIGHT 3000K

### LAMPING

|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Source                | linear LED                                                         |
| Total power           | 69W                                                                |
| Emission              | diffused                                                           |
| Switching             | dimnable 1-10V                                                     |
| Tension               | 110-240V                                                           |
| Color temperature led | 3000K                                                              |
| Luminous flux led     | 3450lm                                                             |
| Typ CRI               | 85                                                                 |
| Ip class              | 20                                                                 |
| Materials             | Aluminium                                                          |
| Notes                 | adjustable cable length from 2,5m to 0,4m, DALI version on request |

### Codes

ELP LWW 54  
ELP LNW 54  
ELP LOW 54  
ELP LLW 54

### Structure


white  
black  
gold painted  
polished aluminium

### PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 7,5 kg

### Certificazioni

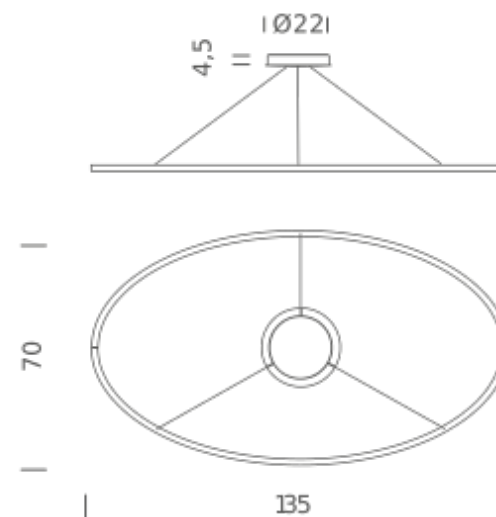

# UPLIGHT 2700K

## LAMPING

|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Source                | linear LED                                                         |
| Total power           | 69W                                                                |
| Emission              | diffused                                                           |
| Switching             | dimnable 1-10V                                                     |
| Tension               | 110-240V                                                           |
| Color temperature led | 2700K                                                              |
| Luminous flux led     | 3450lm                                                             |
| Typ CRI               | 85                                                                 |
| Ip class              | 20                                                                 |
| Materials             | Aluminium                                                          |
| Notes                 | adjustable cable length from 2,5m to 0,4m, DALI version on request |

## Codes

ELP LW2 53  
ELP LN2 53  
ELP LO2 53  
ELP LL2 53  
ELP LGW 53


## Structure

white  
black  
gold painted  
polished aluminium  
gold polished anodized

## PACKAGE

Package 01      Dimension: 15x80x150 cm / Gross weight: 7,5 kg

## Certificazioni

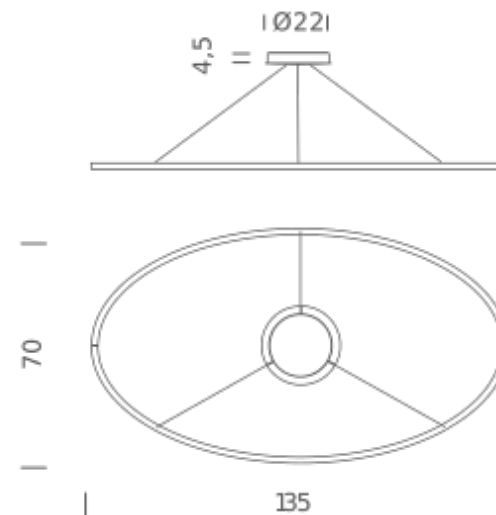

# UPLIGHT 3000K

## LAMPING

|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Source                | linear LED                                                         |
| Total power           | 69W                                                                |
| Emission              | diffused                                                           |
| Switching             | dimnable 1-10V                                                     |
| Tension               | 110-240V                                                           |
| Color temperature led | 3000K                                                              |
| Luminous flux led     | 3450lm                                                             |
| Typ CRI               | 85                                                                 |
| Ip class              | 20                                                                 |
| Materials             | Aluminium                                                          |
| Notes                 | adjustable cable length from 2,5m to 0,4m, DALI version on request |

## Codes

ELP LWW 53  
ELP LNW 53  
ELP LOW 53  
ELP LLW 53

## Structure

white  
black  
gold painted  
polished aluminium

## PACKAGE

Package 01  
Dimension: 15x80x150 cm / Gross weight: 7,5 kg

## Certificazioni

