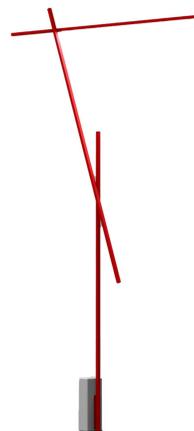# FLAMINGO

Bernhard Osann

Manual interaction and flexibility are the cornerstones of Flamingo:
the variable weight distribution and central centre of gravity allow
the structure to balance itself independently, ensuring stability and
freedom of movement without friction. The adjustable light source
offers functional or decorative illumination.

NEMO

2700K

LAMPING

Source	LED UGR linear
Total power	18W
Switching	dimmable on board
Tension	220/240V
Color temperature led	2700K
Luminous flux led	1800lm
Typ CRI	90
Ip class	20
Dimensions	140x140x10cm
Materials	aluminium
Notes	red RAL3002, black RAL9005

Codes	*Structure*
FLM LNN 21	Black / Stone
FLM LRR 21	Red / Stone
FLM LLH 21	Chrome / Stone

Certificazioni

UK CA

3000K

LAMPING

Source	LED UGR linear
Total power	18W
Switching	dimmable on board
Tension	220/240V
Color temperature led	3000K
Luminous flux led	1800lm
Typ CRI	90
Dimensions	140x140x10cm
Materials	aluminium
Notes	red RAL3002, black RAL9005

Codes	*Structure*
FLM LNN 22	Black / Stone
FLM LRR 22	Red / Stone
FLM LLH 22	Chrome / Stone

Certificazioni

UK
CA