

FLACA

Roberto Paoli

Applique à double émission pour une lumière diffuse vers le haut et vers le bas. En fonte d'aluminium moulé, avec diffuseur inférieur en méthacrylate opalin et diffuseur supérieur transparent.



TRIAC

LAMPING

Source	2xLED board
Total power	24W
Emission	direct/indirect
Switching	dimnable
Tension	110-240V
Color temperature led	3000K
Luminous flux led	1646lm + 642lm
Typ CRI	85
Ip class	20
Materials	aluminium + methacrylate
Notes	anthracite RAL7016, champagne RAL9007
Net lamp weight	2 kg

Codes

FLA LWW 33
FLA LXW 33
FLA LBW 33
FLA LDW 33


Structure

white
anthracite
moka
champagne

PACKAGE

Package 01 Dimension: 20x11x40 cm / Gross weight: 2,5 kg

Certificazioni

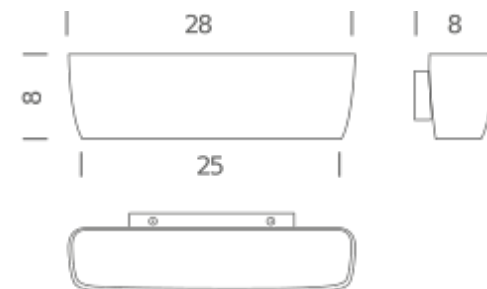

1-10V

LAMPING

Source	2xLED board
Total power	24W
Emission	direct/indirect
Switching	dimmable 1-10V
Tension	110-240V
Color temperature led	3000K
Luminous flux led	1646lm + 642lm
Typ CRI	85
Ip class	20
Materials	aluminium + methacrylate
Notes	anthracite RAL7016, champagne RAL9007
Net lamp weight	2 kg

Codes

FLA LWW 32
FLA LXW 32
FLA LBW 32
FLA LDW 32

Structure

white
anthracite
moka
champagne

PACKAGE

Package 01 Dimension: 20x11x40 cm / Gross weight: 2,5 kg

Certificazioni

