

MINI POTENCE PIVOTANTE

Charlotte Perriand

Charlotte Perriand s'inspire de la bôme des voiliers lorsqu'elle conçoit Potence Pivotante en 1938 : deux tronçons tubulaires sont assemblés en forme de 'L' inversé pour conduire le fil électrique de l'interrupteur à l'ampoule. Le bras en acier fixé au mur tourne sur son axe horizontal, décrivant un angle de presque 180°, se révélant comme une lampe orientable facilement accessible et utilisable.



LED/HALO

LAMPING

Source	G9
Total power	4W
Emission	diffused
Switching	switch on cable
Tension	230V
Color temperature led	2700K
Luminous flux led	400lm
Typ CRI	80
Ip class	20
Dimensions	50x100
Materials	steel + aluminium
Notes	cable length 2,5m, orientable, max power allowed 25W HALO bulb, LED dimmable bulb included. Dimmable (only with direct wall electrical installation). Red RAL3004, grey RAL7046, blue RAL5002, black RAL9005
Accessories	Wall electrical installation cover, black, red, grey
Net lamp weight	1 kg

Codes

POM HNW 31
POM HRW 31
POM HDW 31


Structure

black
red
grey

PACKAGE

Package 01 Dimension: 101x20x12 cm / Gross weight: 2 kg

Certificazioni

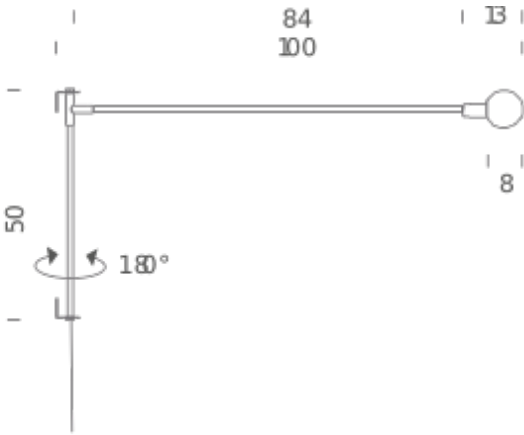

wall electrical
installation
cover

