


ELLISSE PENDANT MEGA

Federico Palazzari

Realizzata in diverse versioni attraverso un'innovativa tecnologia sviluppata da Nemo appositamente per l'accoppiamento degli estrusi, Ellisse garantisce un'illuminazione diffusa diretta e indiretta grazie al LED ospitato nella struttura senza risultare invadente. Il design è lineare e contemporaneo, mentre un'elegante base in marmo nero diventa piedistallo per la versione da terra.

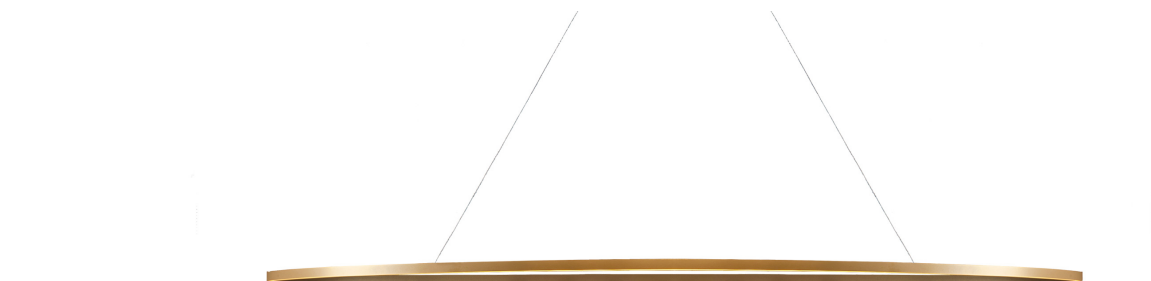

DOWNLIGHT 2700K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimmable 1-10V
Tension	110-240V
Color temperature led	2700K
Luminous flux led	4425lm
Typ CRI	85
Ip class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5 to 0,4 m, DALI version on request, TRIAC VERSION on request

Codes

ELP LW2 59
ELP LN2 59
ELP LO2 59

Structure


white
black
gold painted

PACKAGE

Package 01

Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

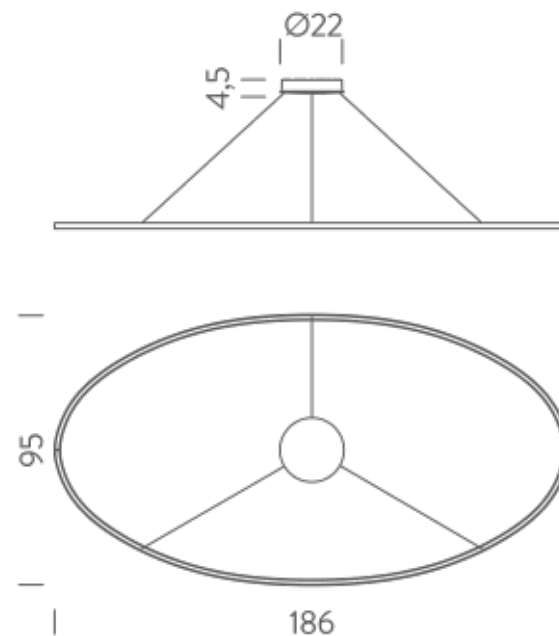

DOWNLIGHT 3000K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimnable 1-10V
Tension	110-240V
Color temperature led	3000K
Luminous flux led	4425lm
Typ CRI	85
Ip class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5 to 0,4 m, DALI version on request

Codes

ELP LWW 59
ELP LNW 59
ELP LOW 59

Structure


white
black
gold painted

PACKAGE

Package 01

Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

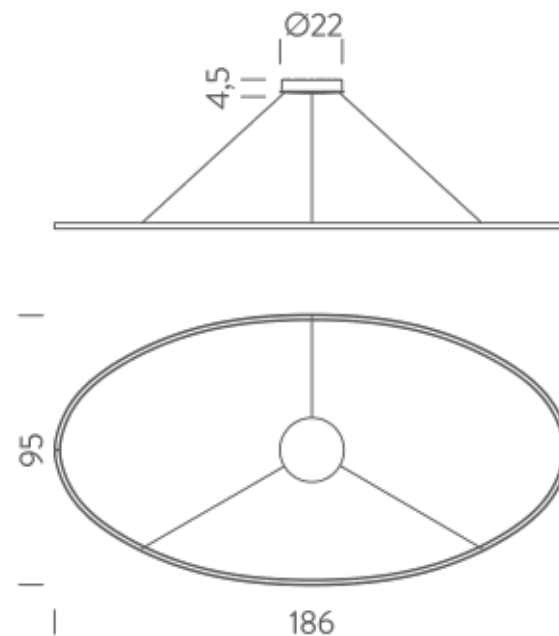

UPLIGHT 2700K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimnable 1-10V
Tension	110-240V
Color temperature led	2700K
Luminous flux led	4425lm
Typ CRI	85
Ip class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5 to 0,4 m, DALI version on request

Codes

ELP LW2 58
ELP LN2 58
ELP LO2 58


Structure

white
black
gold painted

PACKAGE

Package 01 Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

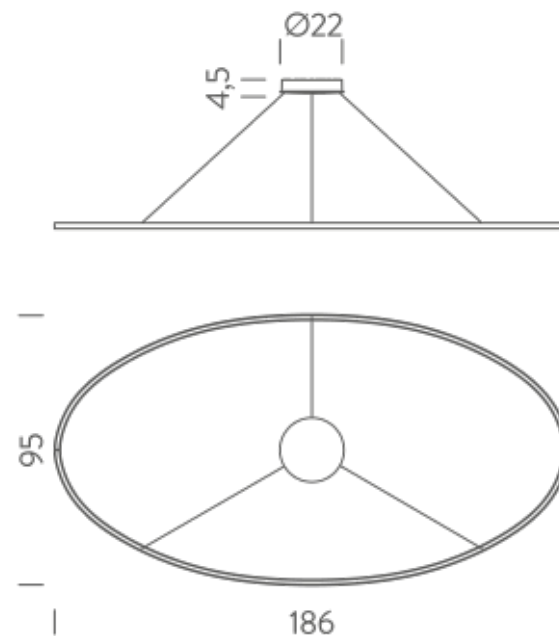

UPLIGHT 3000K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimmable 1-10V
Tension	110-240V
Color temperature led	3000K
Luminous flux led	4425lm
Typ CRI	85
Ip class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5 to 0,4 m, DALI version on request

Codes

ELP LWW 58
ELP LNW 58
ELP LOW 58

Structure

white
black
gold painted

PACKAGE

Package 01 Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

